

Visit nipponpulse.com to download 3D CAD drawings and 2D prints of this motor.

	S250D		S250T		S250Q		
Electrical Specs	S250D	S250D 1S	S250T	S250T 1S	S250Q	S250Q 2S	S250Q 1S
Continuous Force ¹	40N (9.0lbs)		60N (13.5lbs)	58N (13.0lbs)	75N (16.9lbs)		
Continuous Current ¹	1.3Arms	2.6Arms	1.3Arms	3.8Arms	1.3Arms	2.6Arms	5.1Arms
Acceleration Force ²	160N (36.0lbs)		240N (54.0lbs)	232N (52.2lbs)	300N (67.4lbs)		
Acceleration Current ²	5.1Arms	10Arms	5.1Arms	15.2Arms	5.1Arms	10Arms	20Arms
Force Constant (K _f)	31N/Arms (6.86lbs/amp)	16N/Arms (3.54lbs/amp)	47N/Arms (10.67lbs/amp)	15N/Arms (3.37lbs/amp)	59N/Arms (13.3lbs/amp)	29N/Arms (6.54lbs/amp)	15N/Arms (3.38lbs/amp)
Back EMF (K _e)	10.4V/m/s	5.2V/m/s	16V/m/s	5.1V/m/s	20V/m/s	10V/m/s	4.9V/m/s
Resistance 25°C ³	7.8Ω	2Ω	12Ω	1.3Ω	15Ω	3.8Ω	0.94Ω
Inductance ³	9.8mH	2.5mH	15mH	1.6mH	19mH	4.8mH	1.2mH
Electric Time Constant	1.26ms		1.25ms		1.27ms		
Max. Rated Voltage (AC)	240V						
Fundamental Motor Constant (K _m)	11.19N√W		13.53N√W		15.13N√W		
Magnetic Pitch (North-North)	90mm (3.54lbs)						

Is this the proper Linear Shaft Motor for your application? Use our **SMART sizing program** to assist in your decision.

This motor can be customized to fit your application demands; contact your application engineer for more information.


¹ Based on a temp rise of coil surface of 110°K over 25°C ambient temperature stalled forcer, and no external cooling or heat sinking.

² Can be maintained for a maximum of 40 seconds. Higher forces and current possible for short periods of time, consult Nippon Pulse for more information.


³ All winding parameters listed are measured line-to-line (phase-to-phase).

Thermal Specs	S250D	S250T	S250Q
Max Phase Temperature ⁴	135°C (275°F)		
Thermal Resistance (Coil) (K_{θ})	8.6°C/W (47.5°F/W)	5.6°C/W (42.1°F/W)	4.5°C/W (40.1°F/W)

⁴ The standard temperature difference between the coil and the forcer surface is 20°C.

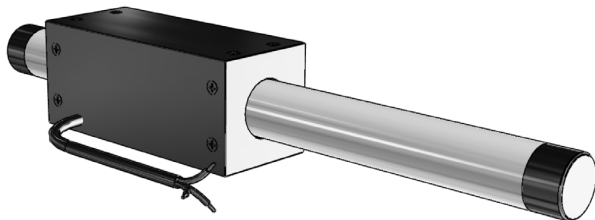

Bus Voltage

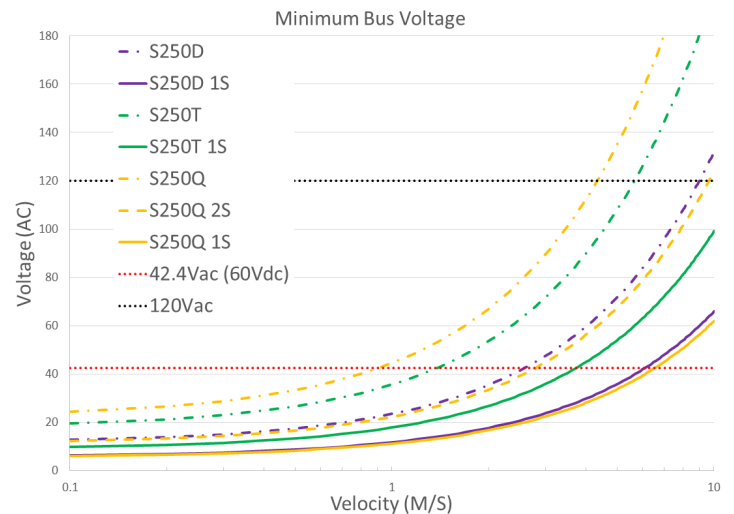

Part Numbering System

S	Shaft Size	Forcer Size (A)	Parallel Option	Usable Stroke (S)	Options	Options
	250	<u>X</u>	<u>XX</u>	<u>XXXXst</u>	<u>XX</u>	<u>XX</u>
		D: Double (2) windings T: Triple (3) windings Q: Quadruple (4) windings X: Octuple (8) windings	Blank: Single Motor PL: Parallel Motors	100-2000mm	Blank: Standard WP: Water Resistant HA: Digital Hall Effect CE: CE type motor FG: Frame Ground	Blank: Standard FO: Forcer Only SO: Shaft Only

Shaft Length (L)


Stroke	S250D	S250T	S250Q
100	320mm (12.6in)	365mm (14.4in)	410mm (16.1in)
150	370mm (14.6in)	415mm (16.3in)	460mm (18.1in)
200	420mm (16.5in)	465mm (18.3in)	510mm (20.1in)
250	470mm (18.5in)	515mm (20.3in)	560mm (22in)
300	520mm (20.5in)	565mm (22.2in)	610mm (24in)
350	570mm (22.4in)	615mm (24.2in)	660mm (26in)
400	620mm (24.4in)	665mm (26.2in)	710mm (28in)
450	670mm (26.4in)	715mm (28.1in)	760mm (29.9in)
500	720mm (28.3in)	765mm (30.1in)	810mm (31.9in)
550	770mm (30.3in)	815mm (32.1in)	860mm (33.9in)
600	820mm (32.3in)	865mm (34.1in)	910mm (35.8in)
650	870mm (34.3in)	915mm (36in)	960mm (37.8in)
700	920mm (36.2in)	965mm (38in)	1010mm (39.8in)
750	1010mm (39.8in)	1055mm (41.5in)	1100mm (43.3in)
800	1060mm (41.7in)	1105mm (43.5in)	1150mm (45.3in)
850	1110mm (43.7in)	1155mm (45.5in)	1200mm (47.2in)
900	1160mm (45.7in)	1205mm (47.4in)	1250mm (49.2in)
950	1210mm (47.6in)	1255mm (49.4in)	1300mm (51.2in)
1000	1260mm (49.6in)	1305mm (51.4in)	1350mm (53.1in)
1050	1310mm (51.6in)	1355mm (53.3in)	1400mm (55.1in)
1100	1360mm (53.5in)	1405mm (55.3in)	1450mm (57.1in)
1150	1410mm (55.5in)	1455mm (57.3in)	1500mm (59.1in)
1200	1460mm (57.5in)	1505mm (59.3in)	1550mm (61in)
1250	1510mm (59.4in)	1555mm (61.2in)	1600mm (63in)
1300	1560mm (61.4in)	1605mm (63.2in)	1650mm (65in)
1350	1610mm (63.4in)	1655mm (65.2in)	1700mm (66.9in)
1400	1660mm (65.4in)	1705mm (67.1in)	1750mm (68.9in)
1450	1710mm (67.3in)	1755mm (69.1in)	1800mm (70.9in)
1500	1760mm (69.3in)	1805mm (71.1in)	1850mm (72.8in)
1550	1870mm (73.6in)	1915mm (73.6in)	1960mm (77.2in)

Shaft Mass

Stroke	S250D	S250T	S250Q
100	0.9kg (2lb)	1.1kg (2.3lb)	1.2kg (2.7lb)
150	1.1kg (2.4lb)	1.2kg (2.7lb)	1.4kg (3.1lb)
200	1.2kg (2.7lb)	1.4kg (3.1lb)	1.6kg (3.4lb)
250	1.4kg (3.1lb)	1.6kg (3.5lb)	1.7kg (3.8lb)
300	1.6kg (3.5lb)	1.7kg (3.8lb)	1.9kg (4.2lb)
350	1.8kg (3.9lb)	1.9kg (4.2lb)	2.1kg (4.6lb)
400	1.9kg (4.3lb)	2.1kg (4.6lb)	2.2kg (4.9lb)
450	2.1kg (4.6lb)	2.3kg (5lb)	2.4kg (5.3lb)
500	2.3kg (5lb)	2.4kg (5.4lb)	2.6kg (5.7lb)
550	2.4kg (5.4lb)	2.6kg (5.7lb)	2.8kg (6.1lb)
600	2.6kg (5.8lb)	2.8kg (6.1lb)	2.9kg (6.5lb)
650	2.8kg (6.2lb)	2.9kg (6.5lb)	3.1kg (6.8lb)
700	3kg (6.5lb)	3.1kg (6.9lb)	3.3kg (7.2lb)
750	3.2kg (7lb)	3.4kg (7.4lb)	3.5kg (7.7lb)
800	3.4kg (7.4lb)	3.5kg (7.8lb)	3.7kg (8.1lb)
850	3.5kg (7.8lb)	3.7kg (8.1lb)	3.8kg (8.5lb)
900	3.7kg (8.2lb)	3.9kg (8.5lb)	4kg (8.9lb)
950	3.9kg (8.6lb)	4kg (8.9lb)	4.2kg (9.2lb)
1000	4.1kg (8.9lb)	4.2kg (9.3lb)	4.4kg (9.6lb)
1050	4.2kg (9.3lb)	4.4kg (9.7lb)	4.5kg (10lb)
1100	4.4kg (9.7lb)	4.6kg (10lb)	4.7kg (10.4lb)
1150	4.6kg (10.1lb)	4.7kg (10.4lb)	4.9kg (10.8lb)
1200	4.7kg (10.5lb)	4.9kg (10.8lb)	5.1kg (11.1lb)
1250	4.9kg (10.8lb)	5.1kg (11.2lb)	5.2kg (11.5lb)
1300	5.1kg (11.2lb)	5.2kg (11.6lb)	5.4kg (11.9lb)
1350	5.3kg (11.6lb)	5.4kg (11.9lb)	5.6kg (12.3lb)
1400	5.4kg (12lb)	5.6kg (12.3lb)	5.7kg (12.7lb)
1450	5.6kg (12.3lb)	5.8kg (12.7lb)	5.9kg (13lb)
1500	5.8kg (12.7lb)	5.9kg (13.1lb)	6.1kg (13.4lb)
1550	6kg (13.3lb)	6.2kg (13.6lb)	6.3kg (14lb)

Additional stroke lengths are available (up to 2615mm for S250D, 2570mm for S250T, and 2525mm for S250Q). Contact Nippon Pulse for more information.

FG Type Motor Cable

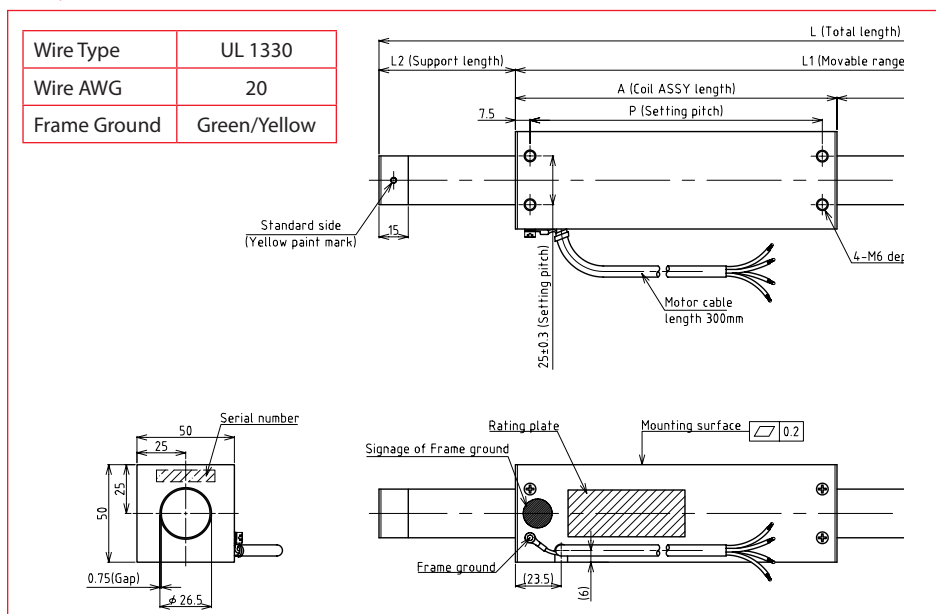

Connector (Motor Cable)

Receptacle Housing	HLR-03V
Plug Housing	HLP-03V
Retainer	HLS-03V
Pin Contact	SSM-21T-P1.4
Socket Contact	SSF-21T-P1.4

To be installed by the user.

Thermocouple


Thermal sensor
Thermocouple K type (marked each phase name)
Attached to the surface of inside of coil
Length 3000mm

Standard Lead Wire

Wire Type	UL 2464FA
Wire AWG	20
U Phase	Red
V Phase	White
W Phase	Black


300mm lead wire bare leads. The bending radius of the motor cable should be 36.6mm as suggested by the wire manufacturer.

CE Option - CE Type Lead Wire

Ground Wire	
Wire Type	UL 1330
Wire AWG	24
U Phase	Red
V Phase	White
W Phase	Black

300mm lead wire bare leads. The bending radius of the motor cable should be 18.96mm as suggested by the wire manufacturer. FG type with insulating sheet between coils and case. Meets all requirements of EN60034-1 (1998).

THM Option

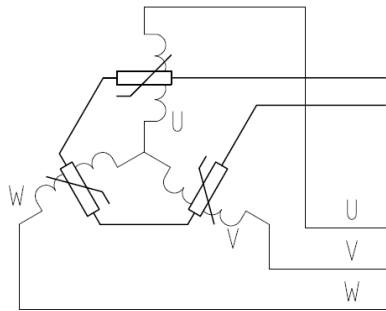

Circuit Diagram

4. Thermistor
PTCSL20T071DBE(Vishay)

Note: Metric units guaranteed. Imperial (United States customary) units are calculated.