

Introduction

General-purpose

High-voltage

Multi-contact (2A, 2A, and 1A)

High-current and low-ON-resistance

Small and high-impedance

High-detective-sensitivity

Current-limiting

Low-ON-resistance and low-voltage

Small and high-impedance

Certified models with standards certification

G3VM-□L/□FL/□GL

MOS FET Relays Current-limiting Type

MOS FET Relays that protect themselves from overcurrents with a current-limiting protection function



- Package: DIP 4-pin, DIP 8-pin or SOP 4-pin
- Contact form: 1a (SPST-NO) or 2a (DPST-NO)
- Load voltage: 350 V
- Current limit: 150 to 300 mA



RoHS Compliant


Note: The actual product is marked differently from the image shown here.

Application Examples

- Communication equipment
- Industrial equipment
- Test & Measurement equipment

Package

(Unit : mm, Average)

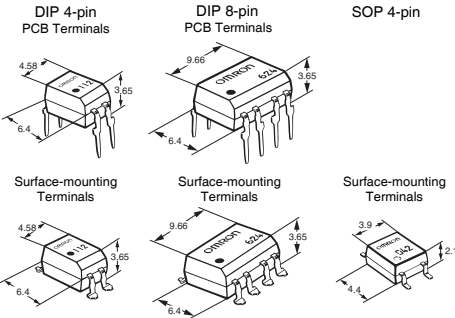

Note: The actual product is marked differently from the image shown here.

Model Number Legend

G3VM-□□□□
1 2 3 4

1. Load Voltage
35 : 350 V
2. Contact form
1 : 1a (SPST-NO)
3. Package
G : SOP 4-pin with surface-mounting terminals
4. Additional functions
L : Current limiting

Note: The model number legend for the G3VM-2L/2FL/WL/WFL is different from the above legend.

Ordering Information

Package	Contact form	Load voltage (peak value) *	Continuous load current (peak value) *	Stick packaging			Tape packaging	
				Model		Minimum package quantity	Model	Minimum package quantity
				PCB Terminals	Surface-mounting Terminals		Surface-mounting Terminals	
DIP4	1a (SPST-NO)	350 V	120 mA	G3VM-2L	G3VM-2FL	100 pcs.	G3VM-2FL(TR)	1,500 pcs.
DIP8	2a (DPST-NO)			G3VM-WL	G3VM-WFL	50 pcs.	G3VM-WFL(TR)	1,500 pcs.
SOP4	1a (SPST-NO)			—	G3VM-351GL	100 pcs.	G3VM-351GL(TR)	2,500 pcs.

* The AC peak and DC value are given for the load voltage and continuous load current.

Note: To order tape packaging for Relays with surface-mounting terminals, add "(TR)" to the end of the model number.

Introduction
General purpose
High-side-voltage
Multi-contact pair
(2A, 2B, and 1A1D)
High-current and
dielectric-strength
Small and high-
dielectric-strength
High-dielectric-
strength
Current-limiting
Low-voltage-resistance
and low-ohmic-resistance
Small and high-
voltage
Certified Models with
Standards Certification
DIP
SOP
SSOP
USOP
VSON
G3VM-□L/□FL/□GL


■Absolute Maximum Ratings (Ta = 25°C)

Item		Symbol	G3VM-2L G3VM-2FL	G3VM-WL G3VM-WFL	G3VM-351GL	Unit	Measurement conditions
Input	LED forward current	IF	50			mA	
	Repetitive peak LED forward current	IFP	1			A	100 μs pulses, 100 pps
	LED forward current reduction rate	ΔIF/°C	-0.5			mA/°C	Ta ≥ 25°C
	LED reverse voltage	VR	6		5	V	
Output	Connection temperature	TJ	125			°C	
	Load voltage (AC peak/DC)	VOFF	350			V	
	Continuous load current (AC peak/DC)	Io	120			mA	
	ON current reduction rate	ΔIo/°C	-1.2			mA/°C	Ta ≥ 25°C
	Connection temperature	TJ	125			°C	
	Dielectric strength between I/O (See note 1.)	VI-o	2500		1500	Vrms	AC for 1 min
Ambient operating temperature		Ta	-40 to +85			°C	With no icing or
Ambient storage temperature		Tstg	-55 to +125			°C	condensation
Soldering temperature		—	260			°C	10 s


Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

■Engineering Data


●LED forward current vs. Ambient temperature




●Continuous load current vs. On-state voltage




●Turn ON, Turn OFF time vs. LED forward current




●Continuous load current vs. Ambient temperature




●On-state resistance vs. Ambient temperature




●Turn ON, Turn OFF time vs. Ambient temperature




●LED forward current vs. LED forward voltage



●Trigger LED forward current vs. Ambient temperature



●Current leakage vs. Ambient temperature



G3VM-□L/□FL/□GL


MOS FET Relays

■Appearance / Terminal Arrangement / Internal Connections


●Appearance

DIP (Dual Inline Package)



DIP 4-pin



●Terminal Arrangement/Internal Connections (Top View)





DIP 8-pin

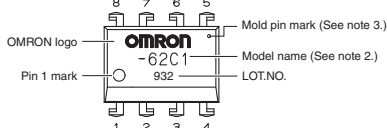

SOP (Small Outline Package)

SOP 4-pin



Note: 1. The actual product is marked differently from the image shown here.

Note: 2. "G3VM" does not appear in the model number on the Relay.

Note: 3. The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.


■Dimensions (Unit: mm)

G3VM-2L



PCB Terminals

Weight: 0.4 g




G3VM-2FL




Surface-mounting Terminals

Weight: 0.4 g




PCB Dimensions (BOTTOM VIEW)



Actual Mounting Pad Dimensions

(Recommended Value, TOP VIEW)




Note: The actual product is marked differently from the image shown here.

G3VM-WL



PCB Terminals

Weight: 0.54 g




G3VM-WFL




Surface-mounting Terminals

Weight: 0.54 g




PCB Dimensions (BOTTOM VIEW)



Actual Mounting Pad Dimensions

(Recommended Value, TOP VIEW)



Note: The actual product is marked differently from the image shown here.

G3VM-□L/□FL/□GL

MOS FET Relays


■Dimensions (Unit: mm)

G3VM-351GL




Surface-mounting Terminals

Weight: 0.1 g



Actual Mounting Pad Dimensions (Recommended Value, TOP VIEW)



Note: The actual product is marked differently from the image shown here.

■Approved Standards

UL recognized 

Model	Approved Standards	Contact form	File No.
G3VM-2L G3VM-2FL	UL (recognized)	1a (SPST-NO)	E80555
G3VM-WL G3VM-WFL		2a (DPST-NO)	

■Safety Precautions

- Refer to the *Common Precautions for All MOS FET Relays* for precautions that apply to all MOS FET Relays.