

VFJA100



Jitter Attenuator to 1GHz

25.4x22mm SMD, PECL/LVPECL



Features

- 1.0 GHz Output Frequency Range
- Ultra Low Jitter: <0.200 ps
- Meets OC-192 Jitter transfer, generation, and tolerance
- Low Power: <220mW typical
- Low Profile SMD package
- Compliant with Telcordia GR-1244-CORE, GR-253-CORE, ITU-T G.813, and ITU-T G.8261



Applications

- Sonet / SDH / ATM
- 10 Gigabit Ethernet
- Forward Error Correction (FEC)

Description

The VFJA100 is a Jitter Attenuator capable of providing an output frequency up to 1 GHz. An internal synthesizer locks to the input reference clock and multiplies it up to the desired output frequency. The output frequency is determined by a VCXO designed for a wide pull range. An internal voltage regulator offers improved stability and noise performance. The output is configured as a differential LVPECL signal and requires external termination resistors. The VFJA100 is available in a 25.4mm x 22 mm surface mount package.

Electrical Specifications

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Note
Input Frequency	Fref		0.008		100	MHz	
Output Frequency	Fout		50		1000	MHz	
Operating Temperature Range	T		0° -40°		70° +85°	°C	Order Code B Order Code G
Output		Signal	PECL / LVPECL				
Supply Voltage	Vcc		3.15	3.30	3.45	V	
Jitter		12KHz to 20MHz		0.2	0.8	ps	
SSB Phase Noise		100Hz 1KHz 10KHz 100KHz		-90 -118 -142 -145		dBc/Hz	@ 622.08MHz

VFJA100
Jitter Attenuator to 1GHz
25.4x22mm SMD, PECL/LVPECL




Electrical Specifications

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Note
Supply Current	I _{cc}	50 Ohm Load		62	75	mA	
Load	50 Ohm to V _{cc} -2V or Thevenin Equivalent						
Duty Cycle		@ 50%	45	50	55	%	
Logic "1" Level	V _{oh}		V _{cc} -0.96		V _{cc} -0.81	V	
Logic "0" Level	V _{ol}		V _{cc} -1.85		V _{cc} -1.65	V	
Lock Range			50	100		ppm	
Input Level		AC Coupled Internally	0.4		3.3	V p-p	
Enable / Disable Function	Input HIGH (>2.5V): DISABLED Input LOW (<0.5V) or floating: ACTIVE					LVCMOS	
Enable / Disable Time	T _e /T _d				100	ns	

Absolute Maximum Ratings

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Note
Supply Voltage	V _{cc}		-0.5		+5.5	V	
Storage Temperature	T _s		-55		+105°	°C	

How to Order

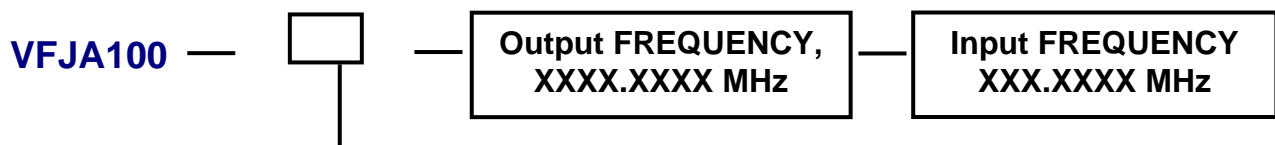

Temperature Range

Code	Specification
B	0°C to +70°C
G	-40°C to +85°C

VFJA100

Jitter Attenuator to 1GHz

25.4x22mm SMD, PECL/LVPECL



Environmental and Mechanical

Parameter	Specification
Mechanical Shock	Per MIL-STD-202, Method 213, Condition E
Thermal Shock	Per MIL-STD-883, Method 1011, Condition A
Vibration	Per MIL-STD-883, Method 2007, Condition A
Soldering Conditions	260°C for 10s max
Hermetic Seal	Leak rate less than 5×10^{-8} atm.cc/s of helium (crystal only)

