

BDT63-A-B-C

SILICON DARLINGTON POWER TRANSISTORS

NPN epitaxial-base transistors in a monolithic Darlington circuit and housed in a TO-220 envelope. They are intended for output stages in audio equipment, general amplifiers, and analogue switching application.

PNP complements are BDT62-A-B-C

Compliance to RoHS.

ABSOLUTE MAXIMUM RATINGS

Symbol	Ratings		Value	Unit
V_{CBO}	Collector-Base Voltage	BDT63	60	V
		BDT63A	80	
		BDT63B	100	
		BDT63C	120	
V_{CEO}	Collector-Emitter Voltage	BDT63	60	V
		BDT63A	80	
		BDT63B	100	
		BDT63C	120	
V_{EBO}	Emitter-Base Voltage	BDT63	5	V
		BDT63A		
		BDT63B		
		BDT63C		
I_C	Collector Current	BDT63	10	A
		BDT63A		
		BDT63B		
		BDT63C		
I_{CM}	Collector Peak Current	BDT63	15	A
		BDT63A		
		BDT63B		
		BDT63C		

BDT63-A-B-C

ABSOLUTE MAXIMUM RATINGS

Symbol	Ratings		Value	Unit	
I_B	Base Current		BDT63	250	mA
			BDT63A		
			BDT63B		
			BDT63C		
P_T	Power Dissipation	@ $T_{mb} < 25^\circ$	BDT63	90	W
			BDT63A		
			BDT63B		
			BDT63C		
T_J	Junction Temperature		BDT63	150	$^\circ\text{C}$
			BDT63A		
			BDT63B		
			BDT63C		
T_s	Storage Temperature range		BDT63	-65 to +150	
			BDT63A		
			BDT63B		
			BDT63C		

Limiting values in accordance with the Absolute Maximum System (IEC 134)

THERMAL CHARACTERISTICS

Symbol	Ratings		Value	Unit
R_{thJ-MB}	From junction to mounting base	BDT63	1.39	K/W
		BDT63A		
		BDT63B		
		BDT63C		
R_{thJ-A}	From junction to ambient in free air	BDT63	70	K/W
		BDT63A		
		BDT63B		
		BDT63C		

BDT63-A-B-C

ELECTRICAL CHARACTERISTICS

TC=25°C unless otherwise noted

Symbol	Ratings	Test Condition(s)		Min	Typ	Max	Unit
I_{CBO}	Collector Cutoff Current	$I_E = 0, V_{CB} = V_{CBOmax}$	BDT63	-	-	0.2	mA
			BDT63A				
			BDT63B				
			BDT63C				
		$I_E = 0, V_{CB} = 1/2 V_{CBOmax}$ $T_J = 150\text{ }^{\circ}\text{C}$	BDT63	-	-	2	mA
			BDT63A				
			BDT63B				
			BDT63C				
I_{CEO}	Collector Cutoff Current	$I_E = 0, V_{CE} = 1/2 V_{CEOmax}$	BDT63	-	-	0.5	mA
			BDT63A				
			BDT63B				
			BDT63C				
I_{EBO}	Emitter Cutoff Current	$V_{EB} = 5\text{ V}, I_C = 0$	BDT63	-	-	5.0	mA
			BDT63A				
			BDT63B				
			BDT63C				
V_{CEO}	Collector-Emitter Breakdown Voltage	$I_C = 30\text{ mA}, I_B = 0$	BDT63	60	-	-	V
			BDT63A	80	-	-	
			BDT63B	100	-	-	
			BDT63C	120	-	-	
$V_{CE(SAT)}$	Collector-Emitter saturation Voltage (*)	$I_C = 3\text{ A}, I_B = 12\text{ mA}$	BDT63	-	-	2	V
			BDT63A				
			BDT63B				
			BDT63C				
		$I_C = 8\text{ A}, I_B = 80\text{ mA}$	BDT63	-	-	2.5	
			BDT63A				
			BDT63B				
			BDT63C				

BDT63-A-B-C

ELECTRICAL CHARACTERISTICS

TC=25°C unless otherwise noted

Symbol	Ratings			Min	Typ	Max	Unit
$V_{BE(on)}$	Base-Emitter Voltage (*)	$I_C= 3\text{ A}$, $V_{CE}= 3\text{ V}$	BDT63	-	-	2.5	V
			BDT63A				
			BDT63B				
			BDT63C				
h_{FE}	DC Current Gain (*)	$V_{CE}= 3.0\text{ V}$, $I_C= 3\text{ A}$	BDT63	1000	-	-	-
			BDT63A				
			BDT63B				
			BDT63C				
		$V_{CE}= 3.0\text{ V}$, $I_C= 10\text{ A}$	BDT63	-	3000	-	
			BDT63A				
			BDT63B				
			BDT63C				
V_{ECF}	C-E Diode Forward Voltage	$I_F= 3\text{ A}$	BDT63	-	-	2	V
			BDT63A				
			BDT63B				
			BDT63C				
C_{OB}	Output Capacitance	$I_E= 0$, $V_{CB}= 10\text{ V}$ $f_{test}= 1\text{ MHz}$	BDT63	-	100	-	pF
			BDT63A				
			BDT63B				
			BDT63C				

SWITCHING TIMES


Symbol	Ratings	Test Condition(s)	Min	Typ	Max	Unit
t_{on}	turn-on time	$I_C = 3\text{ A}$, $V_{CC} = 10\text{ V}$ $I_{B1} = -I_{B2} = 12\text{ mA}$	-	1	2.5	μs
t_{off}	turn-off time		-	5	10	

(*) Pulse Width $\approx 300\text{ }\mu\text{s}$, Duty Cycle $\angle 2.0\%$

BDT63-A-B-C

MECHANICAL DATA CASE TO-220

DIMENSIONS (mm)		
	Min.	Max.
A	9,90	10,30
B	15,65	15,90
C	13,20	13,40
D	6,45	6,65
E	4,30	4,50
F	2,70	3,15
G	2,60	3,00
H	15,75	17,15
L	1,15	1,40
M	3,50	3,70
N	-	1,37
P	0,46	0,55
R	2,50	2,70
S	4,98	5,08
T	2,49	2,54
U	0,70	0,90

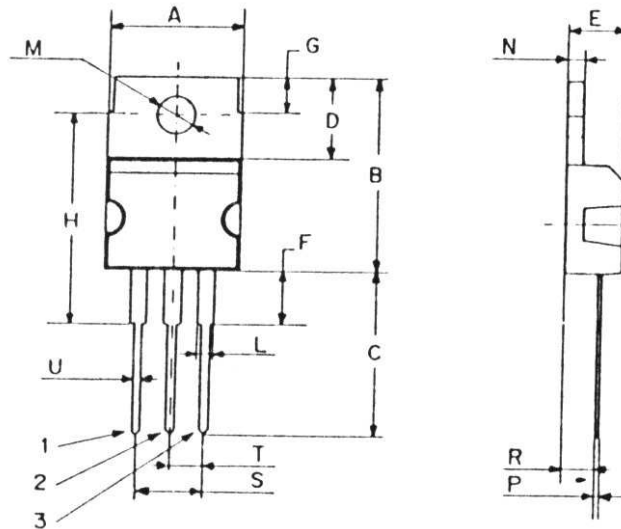

Pin 1 :	Base
Pin 2 :	Collector
Pin 3 :	Emitter
Package	Collector

Revised August 2012

Information furnished is believed to be accurate and reliable. However, Comset Semiconductors assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. Data are subject to change without notice. Comset Semiconductors makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Comset Semiconductors assume any liability arising out of the application or use of any product and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Comset Semiconductors' products are not authorized for use as critical components in life support devices or systems.