



PNP BD240 – A – B – C

MEDIUM POWER LINEAR AND SWITCHING APPLICATIONS.

The BD239, A, B, C are mounted in Jedec TO-220 plastic package.
 They are the silicon epitaxial-base Power Transistors for use in medium power linear and switching applications.
 The NPN complements are BD239, A, B, C.
 Compliance to RoHS.

ABSOLUTE MAXIMUM RATINGS

Symbol	Ratings		Value	Unit
V_{CEO}	Collector-Emitter Voltage	BD240	-45	V
		BD240A	-60	
		BD240B	-80	
		BD240C	-100	
V_{CER}	Collector-Emitter Voltage ($R_{BE} = 100 \Omega$)	BD240	-55	V
		BD240A	-70	
		BD240B	-90	
		BD240C	-115	
V_{CBO}	Collector-Base Voltage	BD240	-45	V
		BD240A	-60	
		BD240B	80	
		BD240C	-100	
V_{EBO}	Emitter-Base Voltage		-5.0	V
I_C	Collector Current	I_C	-3	A
		I_{CM}	-7	
I_B	Base Current		0.5	A
P_T	Power Dissipation	@ $T_{amb} = 25^\circ C$	30	W
		@ $T_{case} = 25^\circ C$	30	W
T_J	Junction Temperature		150	°C
T_S	Storage Temperature		-65 to +150	

THERMAL CHARACTERISTICS

Symbol	Ratings	Value	Unit
$R_{thJ-amb}$	Thermal Resistance, Junction-ambient	70	°C/W
$R_{thJ-case}$	Thermal Resistance, Junction-case	4.17	°C/W

PNP BD240 – A – B – C

ELECTRICAL CHARACTERISTICS

TC=25°C unless otherwise noted


Symbol	Ratings	Test Condition(s)		Min	Typ	Max	Unit
I_{CEO}	Collector Cutoff Current	$V_{CE}=-30\text{ V}$	BD240	-	-	-0.3	mA
		$V_{CE}=-30\text{ V}$	BD240A	-	-		
		$V_{CE}=-60\text{ V}$	BD240B	-	-		
		$V_{CE}=-60\text{ V}$	BD240C	-	-		
I_{EBO}	Emitter Cutoff Current	$V_{BE}=-5\text{ V}$	BD240	-	-	-1.0	mA
			BD240A	-	-		
			BD240B	-	-		
			BD240C	-	-		
I_{CES}	Collector Cutoff Current ($V_{BE} = 0$)	$V_{CE}=-45\text{ V}$	BD240	-	-	-0.2	mA
		$V_{CE}=-60\text{ V}$	BD240A	-	-		
		$V_{CE}=-80\text{ V}$	BD240B	-	-		
		$V_{CE}=-100\text{ V}$	BD240C	-	-		
$V_{CEO(sus)}$	Collector-Emitter Sustaining Voltage ($I_B = 0$) (*)	$I_C = -30\text{mA}$	BD240	-45			V
			BD240A	-60			
			BD240B	-80			
			BD240C	-100			
h_{FE}	DC Current Gain (*)	$V_{CE}=-4\text{ V}$ $I_C=-0.2\text{ A}$	BD240	40	-	-	-
			BD240A				
			BD240B				
			BD240C				
		$V_{CE}=-4\text{ V}$ $I_C=-1\text{ A}$	BD240	15	-	-	
			BD240A				
			BD240B				
			BD240C				
$V_{CE(SAT)}$	Collector-Emitter saturation Voltage (*)	$I_C=-1\text{ A}$ $I_B=-200\text{ mA}$	BD240	-	-	0.6	V
			BD240A				
			BD240B				
			BD240C				
$V_{BE(on)}$	Base-Emitter Voltage (*)	$V_{CE}=-4\text{ V}$ $I_C=-1\text{ A}$	BD240	-	-	1.3	V
			BD240A				
			BD240B				
			BD240C				
h_{fe}	Small Signal Current Gain	$V_{CE}=10\text{ V}$ $I_C=0.2\text{ A}$ $f = 1\text{KHz}$	BD240	20	-	-	-
			BD240A				
			BD240B				
			BD240C				
		$V_{CE}=-10\text{ V}$ $I_C=0.2\text{ A}$ $f = 1\text{MHz}$	BD240	3	-	-	
			BD240A				
			BD240B				
			BD240C				
f_T	Transistor frequency	$V_{CE}=-10\text{ V}$, $I_C=-0.2\text{ A}$, $f = 1\text{MHz}$		3	-	-	MHz

(*) Pulse Width $\approx 300\ \mu\text{s}$, Duty Cycle $\angle 2.0\%$

PNP BD240 – A – B – C

MECHANICAL DATA CASE TO-220

DIMENSIONS (mm)		
	Min.	Max.
A	9,90	10,30
B	15,65	15,90
C	13,20	13,40
D	6,45	6,65
E	4,30	4,50
F	2,70	3,15
G	2,60	3,00
H	15,75	17,15
L	1,15	1,40
M	3,50	3,70
N	-	1,37
P	0,46	0,55
R	2,50	2,70
S	4,98	5,08
T	2,49	2,54
U	0,70	0,90

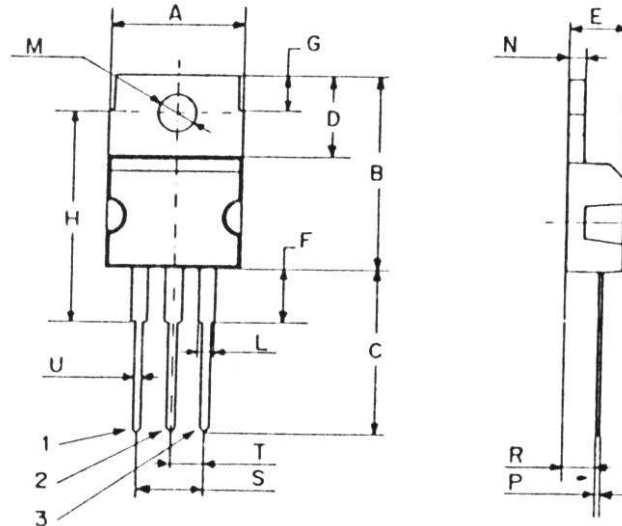

Pin 1 :	Base
Pin 2 :	Collector
Pin 3 :	Emitter
Case :	Collector

Revised September 2012

Information furnished is believed to be accurate and reliable. However, Comset Semiconductors assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. Data are subject to change without notice. Comset Semiconductors makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Comset Semiconductors assume any liability arising out of the application or use of any product and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Comset Semiconductors' products are not authorized for use as critical components in life support devices or systems.