



PNP BCY70 – BCY71 – BCY72

SILICON PLANAR EPITAXIAL TRANSISTORS

The BCY70 - BCY79 – BCY72 are PNP transistors mounted in TO-18 metal.
 General purpose industrial applications.
 Low current and low voltage.
 Compliance to RoHS.

ABSOLUTE MAXIMUM RATINGS

Symbol	Ratings	Value	Unit	
V_{CEO}	Collector-Emitter Voltage ($I_B = 0$)	BCY70	-40	V
		BCY71	-45	
		BCY72	-25	
V_{CEB}	Collector-Emitter Voltage ($I_E = 0$)	BCY70	-50	V
		BCY71	-45	
		BCY72	-25	
V_{EBO}	Emitter-Base Voltage ($I_C = 0$)	-5	V	
I_C	Collector Current	-200	mA	
I_{CM}	Peak Collector Current	-200	mA	
I_{BM}	Peak Base Current	-100	mA	
P_D	Total Power Dissipation	@ $T_{amb} = 25^\circ\text{C}$	390	mW
T_J	<i>Junction Temperature</i>	200	$^\circ\text{C}$	
T_{Stg}	Storage Temperature range	-65 to +150	$^\circ\text{C}$	
T_{amb}	Operating ambient Temperature	-65 to +150	$^\circ\text{C}$	

THERMAL CHARACTERISTICS

Symbol	Ratings	Value	Unit
R_{thJ-a}	Thermal Resistance Junction-ambient	500	$^\circ\text{C}/\text{W}$
R_{thJ-c}	Thermal Resistance, Junction-case	150	$^\circ\text{C}/\text{W}$

PNP BCY70 – BCY71 – BCY72

ELECTRICAL CHARACTERISTICS

T_j=25°C unless otherwise specified

Symbol	Ratings	Test Condition(s)	Min	Typ	Max	Unit			
I _{CES}	Collector Cutoff Current	V _{CB} = -20 V, V _{BE} = 0 V	BCY70	-	-	-10	nA		
			BCY71	-	-	-100			
			BCY72	-	-	-100			
I _{CES}	Collector Cutoff Current	V _{CB} = -50 V V _{BE} = 0 V, T _j = 150 °C	BCY70	-	-	-0.5	μA		
		V _{CB} = -45 V V _{BE} = 0 V, T _j = 150 °C	BCY71	-	-	-10			
		V _{CB} = -25 V V _{BE} = 0 V, T _j = 150 °C	BCY72	-	-	-10			
I _{EBO}	Emitter Cutoff Current	V _{BE} = -5.0 V, I _C = 0	BCY70	-	-	-500	nA		
			BCY71						
			BCY72						
V _{CE(SAT)}	Collector-Emitter saturation Voltage	I _C = -10 mA, I _B = -1 mA	BCY70	-	-	-0.25	V		
			BCY71						
			BCY72						
		I _C = -50 mA, I _B = -5 mA	BCY70	-	-	-0.5			
			BCY71						
			BCY72						
V _{BE(SAT)}	Base-Emitter Saturation Voltage	I _C = -10 mA, I _B = -1 mA	BCY70	-0.6	-	-0.9	V		
			BCY71						
			BCY72						
		I _C = -50 mA, I _B = -5 mA	BCY70	-	-	-1.2			
			BCY71						
			BCY78						
		BCY70		BCY71		BCY72		Unit	
		Min	Max	Min	Max	Min	Max		
h _{FE}	DC Current Gain	I _C = -0.1 mA V _{CE} = -1 V	40	-	80	-	-	-	-
		I _C = -1 mA V _{CE} = -1 V	45	-	90		40	-	
		I _C = -10 mA V _{CE} = -1 V	50	-	100	600	50	-	
		I _C = -50 mA V _{CE} = -1 V	15	-	15	-	-	-	

PNP BCY70 – BCY71 – BCY72

ELECTRICAL CHARACTERISTICS


T_j=25°C unless otherwise specified

Symbol	Ratings	Test Condition(s)	Min	Typ	Max	Unit	
h_{fe}	Small-Signal Current Gain	I _C = -1 mA, V _{CE} = -10 V f = 1kHz	BCY71 only	100	-	400	-
f_T	Transition frequency	I _C = -0.1 mA, V _{CE} = -20 V f = 10.7 MHz	BCY71	15	-	-	MHz
		I _C = -10 mA, V _{CE} = -20 V f = 100 MHz	BCY70	250	-	-	
			BCY71 BCY72	200	-	-	
NF	Noise Figure	I _C = -0.1 mA, V _{CE} = -5 V f = 10 to 10 kHz R _g = 2 kΩ	BCY71	-	-	2	dB
			BCY70	-	-	6	
			BCY72	-	-	-	
t_d	Delay time	I _{Con} = -10 mA I _{Bon} = -I _{Boff} = -1mA V _{EE} = 3 V	BCY70	-	-	35	ns
t_r	Rise time		BCY72	-	-	35	
			BCY70 BCY72	-	-	35	
t_s	Storage time		BCY70	-	-	350	
			BCY72	-	-	350	
t_f	Fall time		BCY70	-	-	80	
			BCY72	-	-	80	
t_{on}	Turn on time		BCY70	-	-	65	
		BCY72	-	-	65		
t_{off}	Turn off time	BCY70	-	-	420		
		BCY72	-	-	420		
C_C	Collector-Base capacitance	I _E = 0, V _{CB} = -10 V f = 1MHz	BCY70	-	-	8	pF
			BCY71	-	-	8	
			BCY72	-	-	8	
C_E	Emitter-Base capacitance	I _C = 0, V _{EB} = -1 V f = 1MHz	BCY70	-	-	8	pF
			BCY71	-	-	8	
			BCY72	-	-	8	

PNP BCY70 – BCY71 – BCY72

ECHANICAL DATA CASE TO-18 (PNP)

DIMENSIONS (mm)		
	min	max
A	12.7	-
B	-	0.49
C	0.9	-
D	-	5.3
E	-	4.9
F	-	5.8
G	2.54	-
H	-	1.2
I	-	1.16
L	45°	-

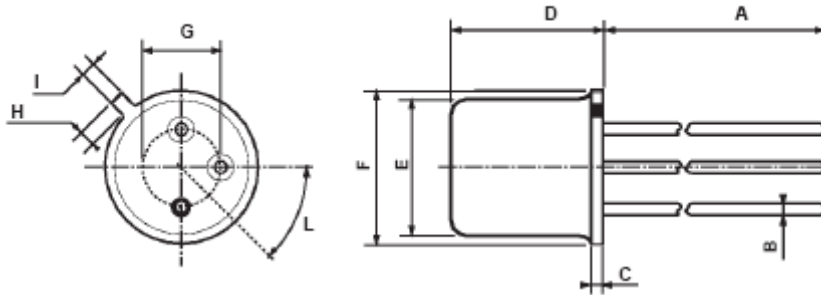

Pin 1 :	emitter
Pin 2 :	base
Pin 3 :	Collector
Case :	Collector

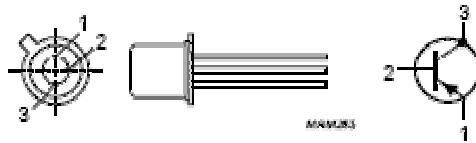


Fig. 1 Simplified outline (TO-18) and symbol.

Revised Ocobert 2012

Information furnished is believed to be accurate and reliable. However, Comset Semiconductors assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may results from its use. Data are subject to change without notice. Comset Semiconductors makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Comset Semiconductors assume any liability arising out of the application or use of any product and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Comset Semiconductors' products are not authorized for use as critical components in life support devices or systems.