

## PNP BC160 – BC161

### GENERAL PURPOSE TRANSISTORS

They are silicon planar epitaxial PNP transistors mounted in TO-39 metal package. They are particularly designed for audio amplifiers and switching applications up to 1A. NPN complements are the BC140 – BC141. Compliance to RoHS.

#### ABSOLUTE MAXIMUM RATINGS

Symbol	Ratings		Value	Unit
$-V_{CBO}$	Collector-Base Voltage $I_E = 0$	BC160	40	V
		BC161	60	
$-V_{CEO}$	Collector-Emitter Voltage $I_B = 0$	BC160	40	V
		BC161	60	
$-V_{EBO}$	Emitter-Base Voltage $I_C = 0$	BC160	5	V
		BC161		
$-I_C$	Collector Current	BC160	1	A
		BC161		
$-I_B$	Base Current	BC160	0.1	A
		BC161		
$P_{tot}$	Total Power Dissipation	@ $T_{case} = < 45^\circ$	3.7	W
		@ $T_{amb} = < 45^\circ$	0.65	
$T_J$	Junction Temperature		175	$^\circ\text{C}$
$T_{Stg}$	Storage Temperature range		-55 to +175	$^\circ\text{C}$

#### THERMAL CHARACTERISTICS

Symbol	Ratings	Value	Unit
$R_{thJ-c}$	Thermal Resistance, Junction-case	35	K/ W
$R_{thJ-amb}$	Thermal Resistance, Junction-ambient	200	K/ W

## PNP BC160 – BC161

### ELECTRICAL CHARACTERISTICS

TC=25°C unless otherwise noted

Symbol	Ratings	Test Condition(s)	Min	Typ	Max	Unit		
$-I_{CES}$	Collector – Cutoff Current	$I_E = 0 ; V_{CES} = 40 V$	BC160	-	-	100	nA	
		$I_E = 0 ; V_{CES} = 60 V$	BC161	-	-	-	-	
		$I_E = 0 ; V_{amb} = 150^\circ C$	$V_{CES} = 40 V$	BC160	-	-	100	$\mu A$
			$V_{CES} = 60 V$	BC161	-	-	-	-
$-V_{CB0}$	Collector – Base Breakdown Voltage	$-I_C = 100 \mu A$	BC160	40	-	-	V	
		$I_E = 0$	BC161	60	-	-		
$-V_{CE0} (*)$	Collector – Emitter Breakdown Voltage	$-I_C = 10 mA$	BC160	40	-	-	V	
		$I_B = 0$	BC161	60	-	-		
$-V_{EB0}$	Emitter – Base Breakdown Voltage	$-I_E = 100 \mu A$	BC160	5	-	-	V	
		$I_C = 0$	BC161					
$-V_{CE(SAT)} (*)$	Collector-Emitter saturation Voltage	$-I_C = 100 mA , -I_B = 10 mA$	-	0.1	-	V		
		$-I_C = 500 mA , -I_B = 50 mA$	-	0.35	-			
		$-I_C = 1 A , -I_B = 100 mA$	-	0.6	1			
$-V_{BE} (*)$	Base-Emitter Voltage	$-I_C = 1 A , -V_{CE} = 1 V$	-	1	1.7	-		
$h_{FE} (*)$	DC Current Gain	$-I_C = 100 \mu A , -V_{CE} = 1 V$	Gr 10	-	80	-	-	
			Gr 16	-	120	-		
		$-I_C = 100 mA , -V_{CE} = 1 V$	Gr 10	63	100	160		
			Gr 16	100	160	250		
		$-I_C = 1 A , -V_{CE} = 1 V$	Gr 10	-	20	-		
			Gr 16	-	30	-		
$f_T$	Transition Frequency	$-I_C = 50 mA , -V_{CE} = 10 V$	50	-	-	MHz		
$C_{CB0}$	Collector – base Capacitance	$I_E = 0 ; -V_{CB} = 20V$ $f = 1 MHz$	-	15	30	pF		
$t_{off}$	Turn-off times	$-I_C = 100 mA$ $-I_{B1} = -I_{B2} = 5 mA$	-	-	650	ns		
$t_{on}$	Turn-on times	$-I_C = 100 Ma$ $-I_{B1} = 1 mA$	-	-	500	ns		


(\*) Pulsed : pulse duration = 300 $\mu s$ , duty cycle = 1%

## PNP BC160 – BC161

### MECHANICAL DATA CASE TO-39

DIMENSIONS (mm)		
	min	max
A	8.50	9.39
B	7.74	8.50
C	6.09	6.60
D	0.40	0.53
E	-	0.88
F	2.41	2.66
G	4.82	5.33
H	0.71	0.86
J	0.73	1.02
K	12.70	-
L	42°	48°

Pin 1 :	Emitter
Pin 2 :	Base
Pin 3 :	Collector
Case :	Collector

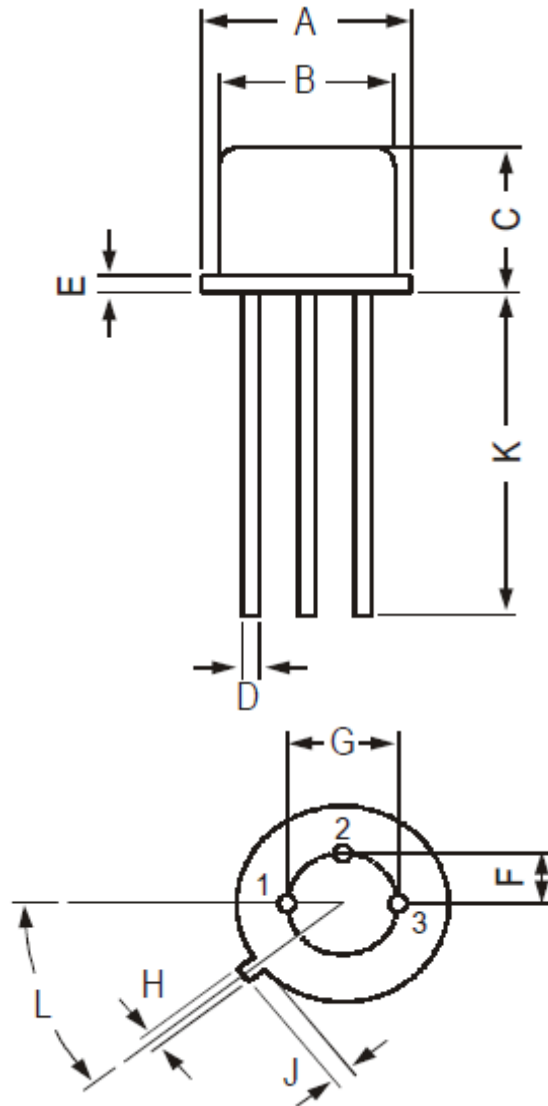

Revised September 2012

Information furnished is believed to be accurate and reliable. However, Comset Semiconductors assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. Data are subject to change without notice. Comset Semiconductors makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Comset Semiconductors assume any liability arising out of the application or use of any product and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Comset Semiconductors' products are not authorized for use as critical components in life support devices or systems.