


SPECIFICATION SHEET

Assembly Part Number:
2451-1965-100

Reed Specifications

Physical	
Configuration*	SPST
Form*	A
Contact Position	CENTER
Glass L	19.00 mm
Glass D	2.60 mm
Total L*	55.00 mm
Wire D	0.70 mm
Gap Location	CENTER
Mount Spec*	THRU
Contact Material	RHODIUM
Max Vibration Resistance	35 G
Max Shock Resistance	50 G
Lead Tensile Strength	N/A KG
Operating	
Pull in (+/- 2AT)*	20 - 25 AT
Drop out*	15 AT
Operate Time	2.00 ms
Bounce Time	0.50 ms
Release Time	0.10 μs
Resonant Frequency	4200 Hz
Max Operating Frequency	300 Hz
Operating Temperature Range	-40 - 105 °C
Storage Temperature	N/A °C
DC Contact Rating	40 W
Electrical	
AC Contact Rating	40 VA
DC Switching Voltage	400 VDC
AC Switching Voltage	400 VAC
DC Switching Current	2.00 A
AC Switching Current	2.00 A
DC Max Carry Current	3.00 A
AC Max Carry Current	3.00 A
Min Breakdown Voltage	1000 VDC
Max Initial Contact Resistance	80 mOhm
Typical Initial Contact Resistance	N/A mOhm
Max Contact Capacitance	0.50 pF
Min Insulation Resistance	10 ¹¹ Ohm

DIA 0.313" [7.950mm]
 5/16 - 24 THREAD

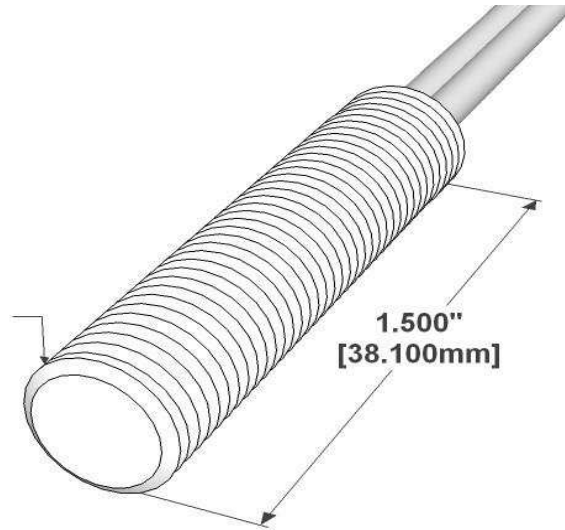

Assembly Characteristics

Housing	2451
Housing Material	ANODIZED AL (T6/6061)
Reed	1965
Configuration	SPST
Form	A

Wire/Cable Characteristics

Type	WIRE
Length	18.0/457.2 in/mm
Conductor Count	2
Colors	BLK
Insulation Material & Description	PVC
Gauge	24 AWG
Stranded Copper	7 STR-TC
Maximum temperature	105 °C

Standard Actuator/Minimum Make Distance

2451-4006-000 - Alnico 5 - Cylinder	.19/4.83 in/mm
-------------------------------------	----------------

Assembly Certifications

UL RECOGNIZED (File #: E102207)	Y
RoHS	Y

For More Information Visit:
www.reedswitchdevelopments.com

Or Call Us At:
 262-883-9060

IT SHALL BE THE RESPONSIBILITY OF THE BUYER TO ENSURE THAT THE GOODS ARE SUFFICIENT AND SUITABLE FOR THE PURPOSE OR PURPOSES INTENDED (WHETHER BY THE BUYER OR BY ANY THIRD PARTY) AND THAT THEIR CAPACITY AND PERFORMANCE IS NOT ADVERSELY AFFECTED BY ANY ITEMS USED IN THEIR INSTALLATION (WHERE RELEVANT) AND/OR IN CONNECTION WITH THEM.

* Pre-processed, bare reed element