


# VFVX301

## VCXO Low Jitter 2.5V, 3.3V

### 5x7mm SMD, LVPECL / LVDS

#### Features

- 38MHz to 700MHz Frequency Range
- Ultra Low Phase Noise
- <0.5ps jitter over 12KHz ~ 20MHz
- APR to ± 150ppm

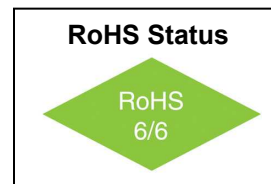

#### Applications

- Optical Networking, SONET / SDH
- 10 Gigabit Ethernet
- Broadband Access

#### Electrical Specifications

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Note
Frequency Range	F		38		700	MHz	
Frequency Stability	$\Delta F/F$	Vs. Operating Temperature			± 50 ± 25 ± 20	ppm	Order Code B Order Code C Order Code D
		Vs. Supply Voltage Vs. Aging / Year		± 1.5 ± 3 ± 1	± 3	ppm/V ppm ppm	First Year After first year
Operating Temperature	T		0° -40°		+70° +85°	°C	Order Code B Order Code G
Output		LVPECL LVDS					Order Code L Order Code D
Supply Voltage	V <sub>CC</sub>		3.15 2.35	3.3 2.5	3.45 2.65	V	Order Code E Order Code G
Voltage Control	V <sub>C</sub>		0 0		3.3 2.5	V	0.3 – 3.0 available
APR			100	150		ppm	
Period Jitter RMS		77.76 MHz		2.5	4	ps	
		155.52 MHz		3	4		
		311.08 MHz		3	5		
		622.08 MHz		6	8		
Integrated Jitter RMS 12KHz to 20MHz		155.52MHz		0.4	0.5	ps	
		311.04MHz		0.4	0.5		
		622.08MHz		0.4	0.5		
Period Jitter Peak-to-Peak		77.76MHz		18	30	ps	
		155.52MHz		20	30		
		311.08MHz		25	30		
		622.08MHz		42	55		
VCON Modulation Bandwidth	BW	0V < VCON < 3.3V	25			KHz	

**VFVX301**  
**VCXO Low Jitter 2.5V, 3.3V**  
**5x7mm SMD, LVPECL / LVDS**

**Electrical Specifications**

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Note		
Symmetry		$(V_{DD}-1.3) V_{DC}$ $1.25V_{DC}$	45 45		55 55	%	PECL LVDS		
Phase Noise		10Hz		-66		dBc/Hz	@77.76MHz		
		100Hz		-96					
		1KHz		-124					
		10KHz		-136					
		100KHz		-132					
		1MHz		-145					
		10Hz		-62		dBc/Hz	@155.52MHz		
		100Hz		-92					
		1KHz		-120					
		10KHz		-132					
		100KHz		-128					
		1MHz		-144					
		10Hz		-59		dBc/Hz	@311.04MHz		
		100Hz		-86					
		1KHz		-116					
		10KHz		-129					
		100KHz		-124					
		1MHz		-140					
Supply Current	$I_{CC}$	38 – 100MHz			65	mA	PECL		
		100 – 300MHz			80				
		300 – 640MHz			90				
		38 – 100MHz			45			mA	LVDS
		100 – 320MHz			60				
		320 – 640MHz			70				
Load	50 Ohm to $V_{DD}-2V$ (PECL) 100 Ohm (LVDS)								
Output High Voltage	$V_{OH}$		$V_{DD}-1.025$ 1.4		1.6	V	PECL LVDS		
Output Low Voltage	$V_{OL}$		0.9	1.1	$V_{DD}-1.620$	V	PECL LVDS		
Output Differential Voltage	$V_{OD}$		247	355	454	mV	LVDS		
Offset Voltage	$V_{OS}$		1.125	1.2	1.375	V	LVDS		
Rise / Fall Time	$T_r/T_f$	20% to 80%		0.6 0.7	1.5 1.0	ns	PECL LVDS		
Tristate	"1": Output Enable – Pin 2 may float 2.8V min (3.3V $V_{DD}$ ) or 2.25V min (2.5V $V_{DD}$ ) "0": Tristate – Pin 2 requires 0.4V max (3.3V or 2.5V $V_{DD}$ )								

**VFVX301**  
**VCXO Low Jitter 2.5V, 3.3V**  
**5x7mm SMD, LVPECL / LVDS**

**Absolute Maximum Ratings**

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Note
Lead Temperature		Soldering, 10s max			260	°C	
Storage Temperature	T <sub>s</sub>		-55		+125°	°C	
Junction Temperature	T <sub>J</sub>				+125°	°C	
Supply Voltage	V <sub>C</sub>		-1		4.6	V	
ESD Protection		Human Body Model			2	kV	


**Environmental and Mechanical Conditions**

Parameter	Specification
Shock	1000 Gs, 0.35ms, ½ sine wave, 3 shocks in each plane
Humidity	Resistant to 85 °R.H. at 85 °C
Vibration	10-2000 Hz of 0.06" d.a. or 20 Gs, whichever is less
Leak	Leak rate less than 5x10 <sup>-8</sup> atm.cc/s of helium (crystal only)
Case	Ceramic with hermetic resistance-welded metal lid
Pads	Solderable gold over nickel
Marking	Epoxy ink or laser engraved
Resistance to Solvents	MIL STD 202, Method 215


# VFVX301

## VCXO Low Jitter 2.5V, 3.3V

### 5x7mm SMD, LVPECL / LVDS

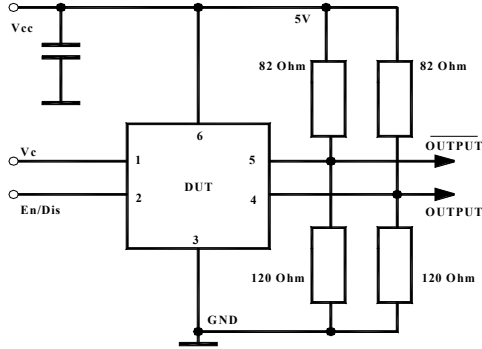

Pin #	Connection
1	V <sub>c</sub>
2	Tristate
3	Case, GND
4	Output
5	Output
6	Supply Voltage

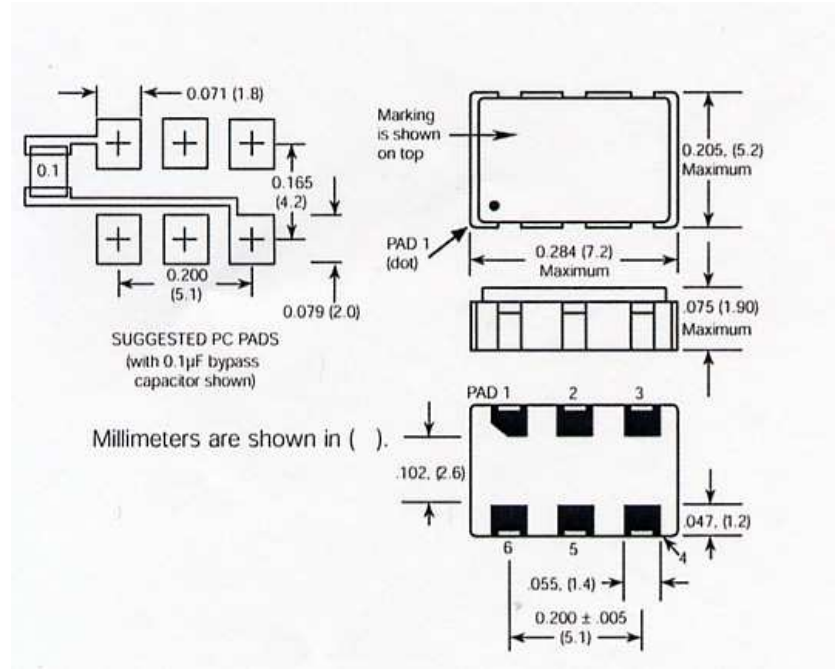

### How to Order



Stability	
Code	Specification
B	50 ppm
C	25 ppm
D	20 ppm

Temperature Range	
Code	Specification
B	0°C to 70°C
G	-40°C to 85°C

Supply Voltage	
Code	Output
E	3.3V
G	2.5V

Output	
Code	Output
L	LVPECL
D	LVDS