


FEATURES

- Cylindrical leadless type for surface mounting.
- 5.5mm height.
- Wide temperature (-40°C ~ +85°C)..
- Long life, 2000 hours at 85°C.
- Solvent resistant (2 minutes).
- Designed for automatic mounting and reflow soldering.

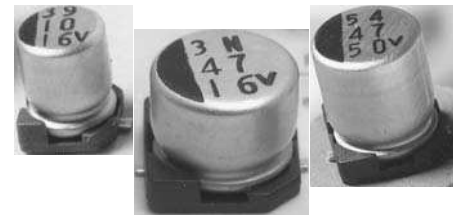

PART NUMBERING

Part Number Example: MXMS-025/100M4X5TR13F

MXMS	-	025	/	100	M	4X5	TR	13	F
Type		Rated DC Voltage		Capacitance Code (μF)*	Tolerance Code	Size	Package Code**	Reel Size	RoHs Compliant


* Capacitance Code: First two digits represent significant figure, third digit represents multiplier (number of zeros).
 ** Package Code: TR = Tape & Reel.

SPECIFICATIONS

Performance Characteristics							
Operating Temperature Range	-40°C ~ +85°C.						
Temperature Characteristics (120Hz)	Impedance Ratio						
	Rated Voltage (WVDC)	6.3	10	16	25	35	50
	Z (-40°C) / Z (+20°C)	4	3	2	2	2	2
	Z (-55°C) / Z (+20°C)	10	8	6	4	4	4
Voltage Range	6.3VDC ~ 50VDC.						
Surge Voltage (20°C, 120Hz)	VDC	8	13	20	32	44	63
Capacitance Range	4.7μF ~ 150μF.						
Capacitance Tolerance	±20%.						
Maximum Dissipation Factor (20°C, 120Hz)	Rated Voltage (WVDC)	6.3	10	16	25	35	50
	DF %	28	24	20	16	14	12
Maximum Leakage Current (20°C) (after 2 minutes)	0.01CV or 3μA, whichever is greater.						
Load Life Test (85°C, 2000 hours)	Capacitance Change	Within ±25% of initial measured value.					
	DF	Less than 200% of specific value.					
	Leakage Current	Less than specified value.					



STANDARD PRODUCT TABLE (dØ X L(mm))

Capacitance (μF)	WVDC					
	6.3	10	16	25	35	50
4.7						4 x 5.5
10				4 x 5.5	4 x 5.5	5 x 5.5
22		4 x 5.5	4 x 5.5	5 x 5.5	5 x 5.5	6.3 x 5.5
33	4 x 5.5	5 x 5.5	5 x 5.5	6.3 x 5.5		
47	4 x 5.5	5 x 5.5	5 x 5.5	6.3 x 5.5		
56	5 x 5.5	5 x 5.5	5 x 5.5	6.3 x 5.5		
100	5 x 5.5	5 x 5.5				
150		6.3 x 5.5				

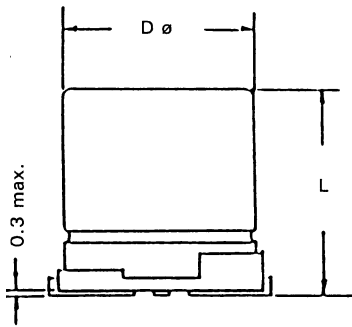

DIMENSIONS (mm)

Case Size	dØ ± 0.5	L Max.	A ± 0.2	B ± 0.2	1 ± 0.2	W	P ± 0.2
4 x 5.5	4.0	5.5	4.3	4.3	1.8	0.5 ~ 0.8	1.0
5 x 5.5	5.0	5.5	5.3	5.3	2.1	0.5 ~ 0.8	1.4
6.3 x 5.5	6.3	5.5	6.6	6.6	2.5	0.5 ~ 0.8	2.2

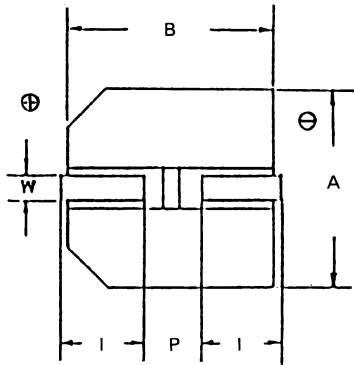

RECOMMENDED LAND PATTERN

Case Size	A	B	P
4 x 5.5	2.5	1.6	1.0
5 x 5.5	2.7	1.6	1.4
6.3 x 5.5	3.1	1.6	2.2

MAXIMUM RIPPLE (mA rms @ 120Hz & 105°C)

Cap. (µF)	WVDC					
	6.3	10	16	25	35	50
4.7						18
10				20	20	27
22		28	28	35	38	40
33	31	32	40	42	58	
47	36	43	44	65		
56	48	48	48	68		
100	47	50				
150		76				

MAXIMUM ESR (Ω @ 120Hz & 20°C)

Cap. (µF)	WVDC					
	6.3	10	16	25	35	50
4.7						42.3
10				26.5	23.2	19.9
22		18.1	15.1	12.1	10.8	9.05
33	14.1	12.6	10.1	8.04	7.04	
47	9.88	8.47	7.06	5.65		
56	8.29	7.11	5.22	4.74		
100	4.64	3.96				
150		2.56				