

3-line low capacitance protection for high speed USB

Datasheet – production data

Features

- Ultra low capacitance 0.85 pF
- Unidirectional device
- Low clamping factor V_{CL}/V_{BR}
- Fast response time
- Very thin package: 0.605 mm max
- Low leakage current

Benefits

- High ESD and EOS protection level
- High integration
- Suitable for high density boards

Complies with the following standards:

- IEC 61000-4-2 level 4
- MIL STD 883G - Method 3015.7: class 3B

Application

High speed USB port in wireless handsets (up to 480 Mb/s according to USB 2.0 high speed specification)

Description

The USBULC6-3F3 is a monolithic, application specific discrete device dedicated to ESD protection of high speed interfaces.

Its ultralow line capacitance secures a high level of signal integrity without compromising the protection of downstream sensitive chips against the most stringently characterized ESD strikes.

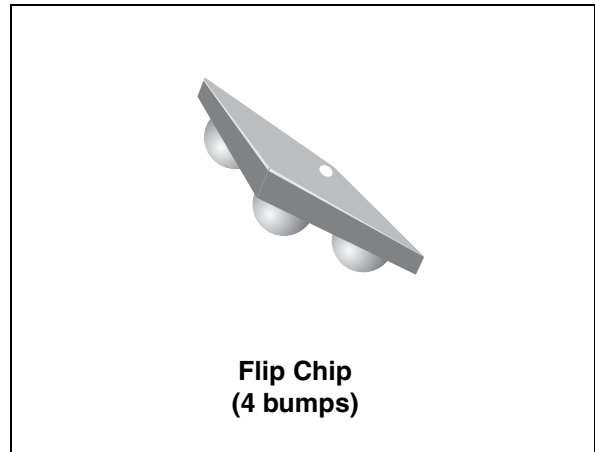
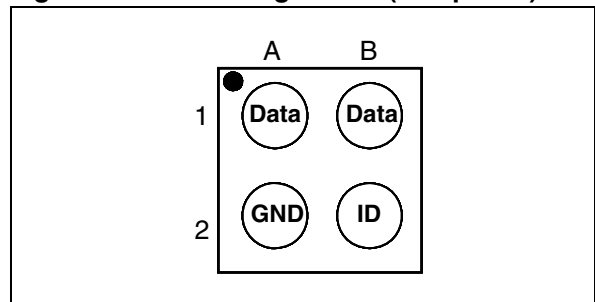


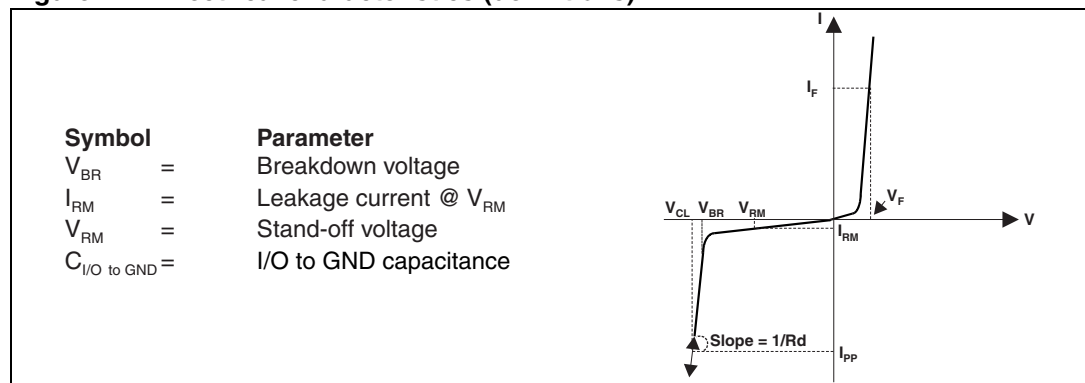
Figure 1. Pin configuration (bump side)



1 Characteristics

Table 1. Absolute maximum ratings ($T_{amb} = 25\text{ °C}$)

Symbol	Parameter		Value	Unit
V _{PP}	ESD discharge IEC 61000-4-2, level 4 contact discharge		8	kV
P _{PP}	Peak pulse power dissipation (8/20 μs)	T _j initial = T _{amb}	50	W
I _{PP}	Peak pulse current (8/20 μs)		2.5	A
T _j	Maximum junction temperature		125	°C
T _{op}	Operating temperature range		-30 to + 85	°C
T _{stg}	Storage temperature range		-55 to +150	°C

Figure 2. Electrical characteristics (definitions)

Table 2. Electrical characteristics ($T_{amb} = 25\text{ °C}$)

Symbol	Test conditions	Min.	Typ.	Max.	Unit
V_{BR}	$I_R = 1\text{ mA}$	6	-	-	V
I_{RM}	$V_{RM} = 3\text{ V}$	-	-	100	nA
$C_{I/O \text{ to GND}}$	Data (A1 and B1 bumps): $V_R = 0\text{ V DC}$, $F = 1\text{ MHz}$, $V_{OSC} = 30\text{ mV}$	-	0.85	1.2	pF
	ID (B2 bump): $V_R = 0\text{ V DC}$, $F = 1\text{ MHz}$, $V_{OSC} = 30\text{ mV}_{RMS}$	-	-	3	

Figure 3. Relative variation of peak pulse power versus initial junction temperature (typical value)

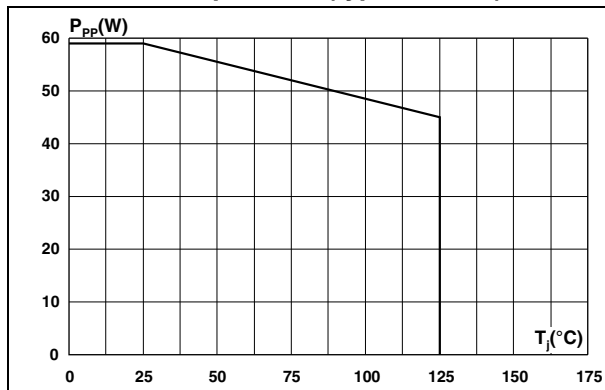


Figure 4. Peak pulse power versus exponential pulse duration (typical)

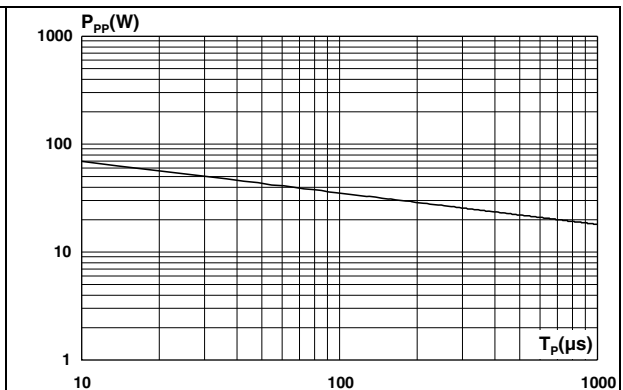


Figure 5. Clamping voltage versus peak pulse current (typical values, exponential waveform)

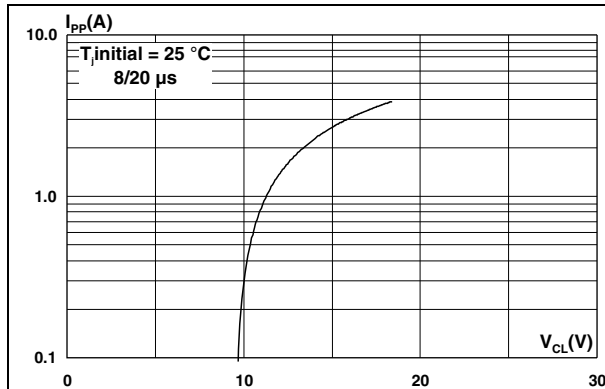


Figure 6. Forward voltage drop versus peak forward current (typical values)

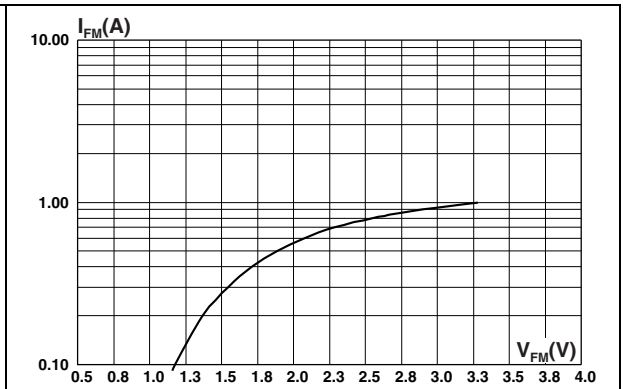


Figure 7. Junction capacitance versus reverse voltage applied (typical values)

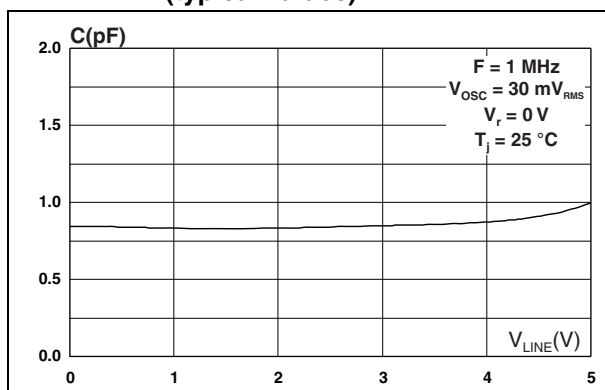


Figure 8. Junction capacitance versus frequency (typical values)

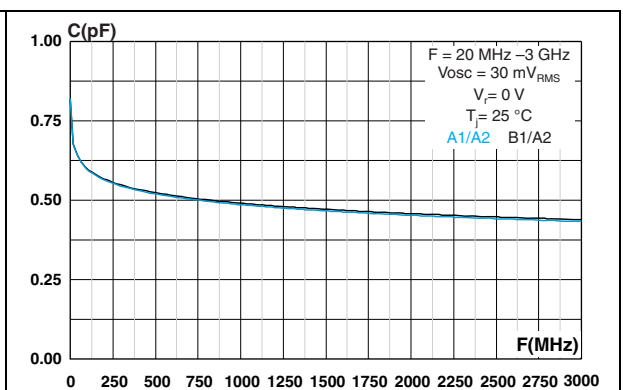


Figure 9. Leakage current versus junction temperature (typical values)

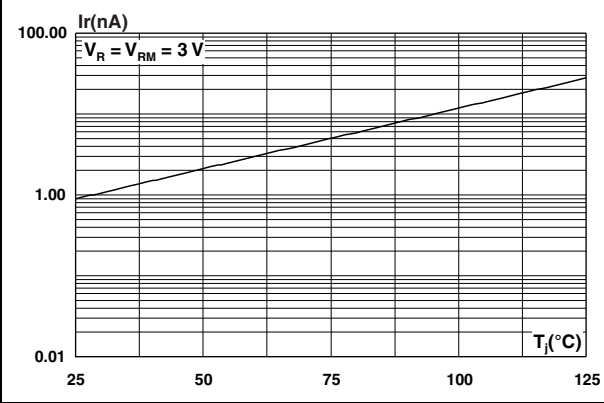


Figure 10. S21 (dB) attenuation

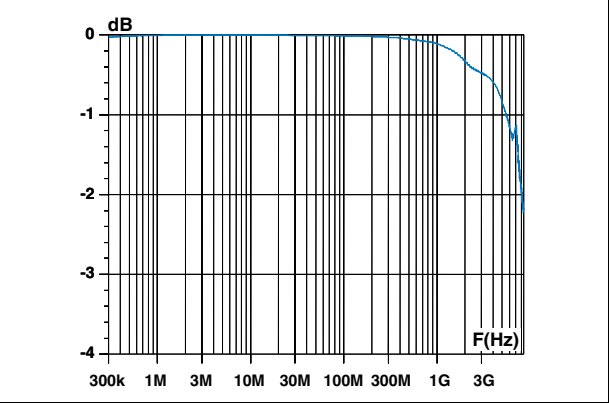


Figure 11. ESD response to IEC 61000-4-2 (+8 kV contact discharge)

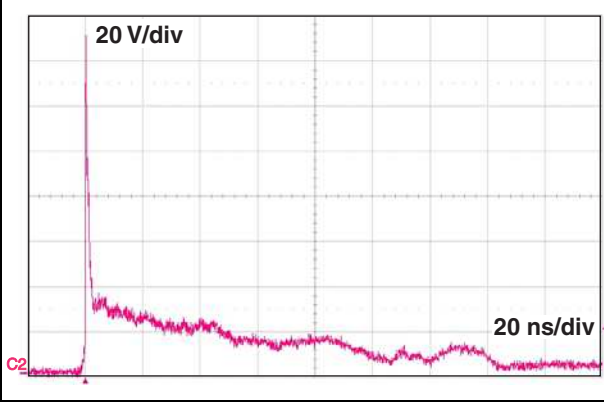


Figure 12. ESD response to IEC 61000-4-2 (-8 kV contact discharge)

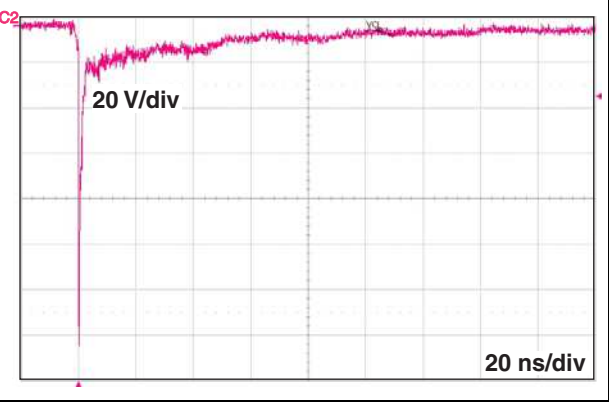


Figure 13. Eye diagram PCB only, 400 mV amplitude, F = 480 Mbps

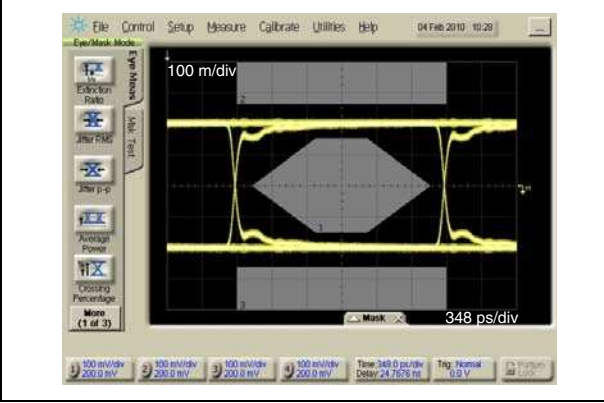
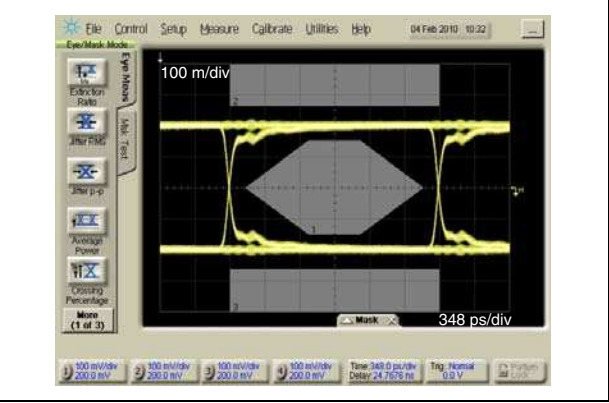
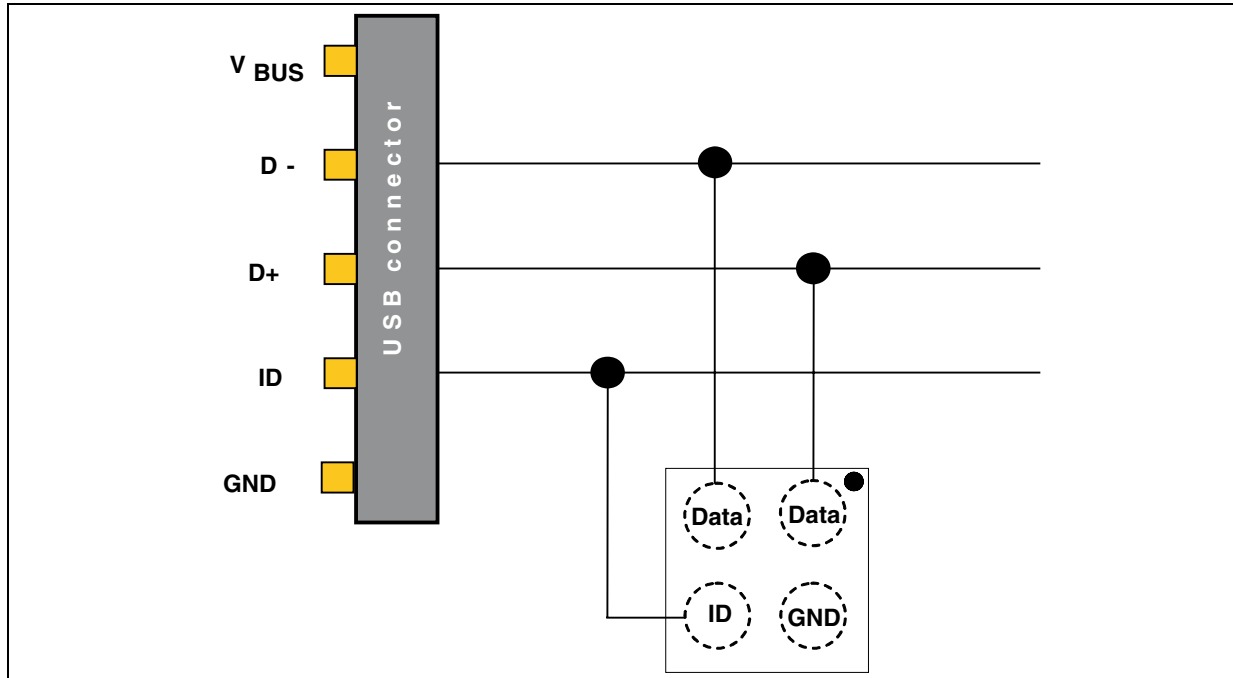


Figure 14. Eye diagram PCB + USBULC6-3F3 400 mV amplitude, F = 480 Mbps



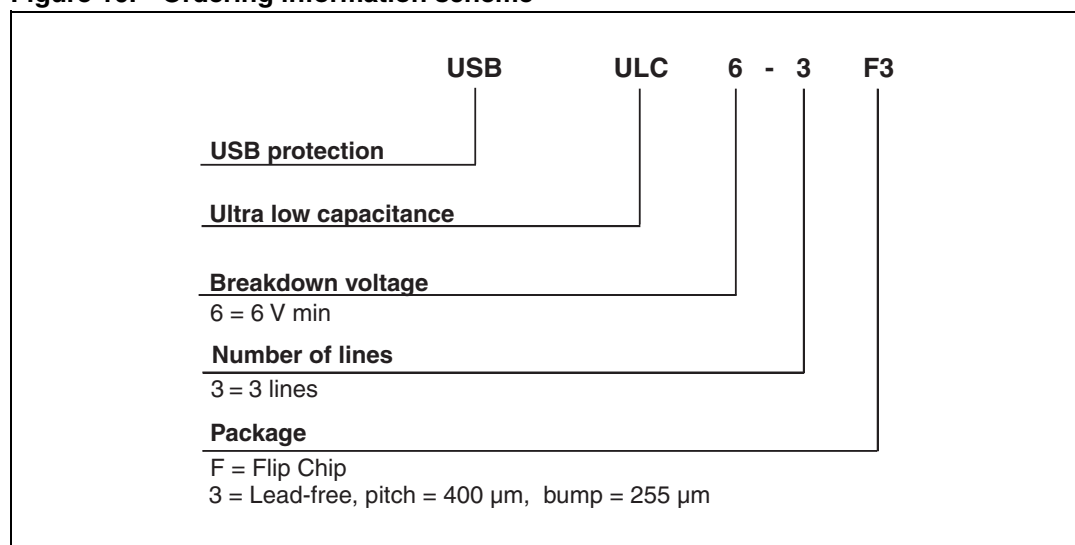
2 Application schematic example

Figure 15. Schematic example



3 Ordering information scheme

Figure 16. Ordering information scheme



4 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com. ECOPACK® is an ST trademark.

Figure 17. Package dimensions

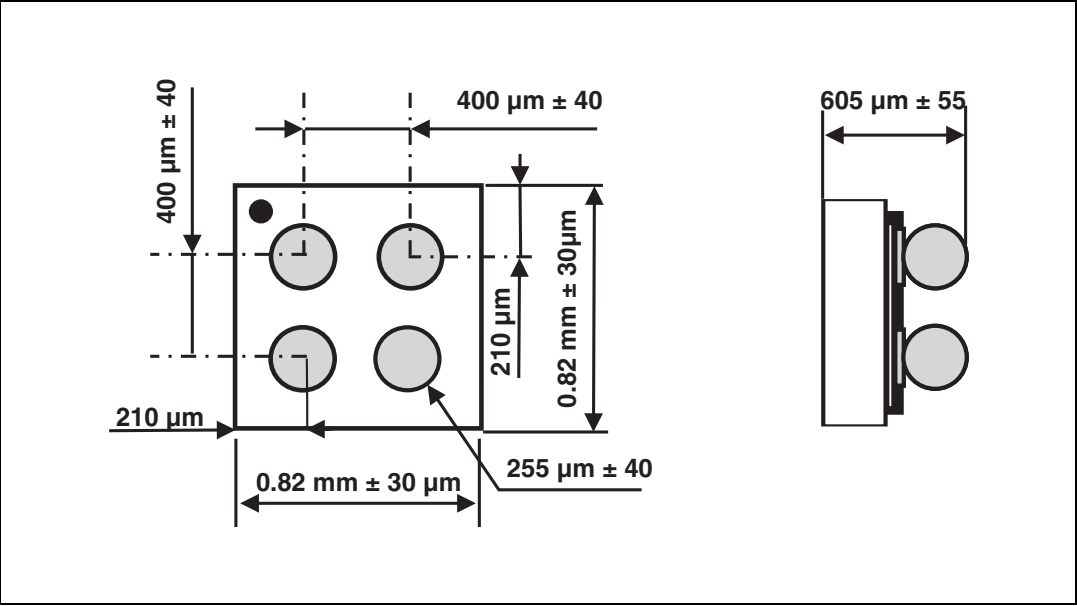
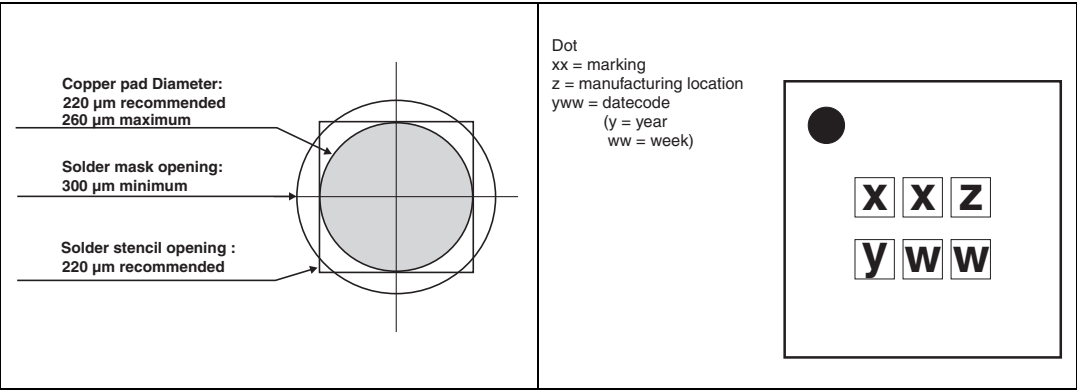
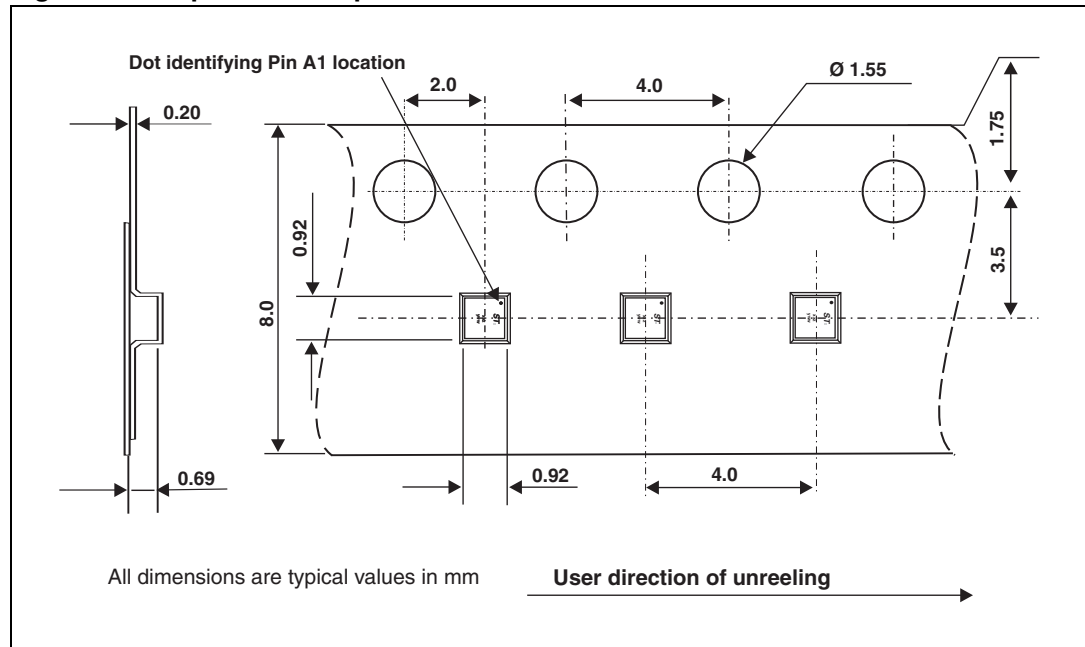


Figure 18. Footprint recommendations Figure 19. Marking



5 Tape and reel specification

Figure 20. Tape and reel specifications



6 Ordering information

Table 3. Ordering information

Order code	Marking	Package	Weight	Base qty	Delivery mode
USBULC6-3F3	EV	Flip Chip	0.86 mg	5000	Tape and reel

7 Revision history

Table 4. Document revision history

Date	Revision	Changes
01-Jul-2010	1	Initial release.
28-Mar-2012	2	Updated pin references in Table 2 . Corrected units for I_{pp} in Table 1 . Updated Figure 20 for device pitch.

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY TWO AUTHORIZED ST REPRESENTATIVES, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2012 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com