


25-100518

QF8 Series

Multiple Output Switching Power Supplies

Features

- * UL Recognized to UL 1012, 478, 1950+
- * CSA Certified to C 22.2 N. 220 - M1986 and EB1402+
- * TUV Licensed to IEC 380 and VDE 0806 Class 1 SELV+
- * Fully compliant with FCC and VDE (Level A) standards for EMI
- * 0° - 70°C operating ambient

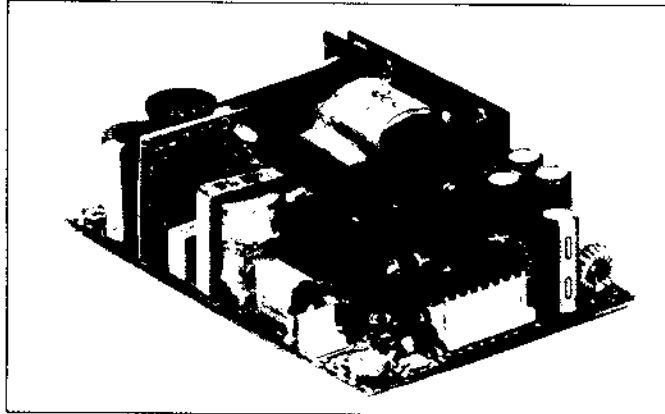

- * AC input provisions:
 - 90-132/180-264 VAC, 47-63HZ
 - jumper relocation for VAC range selection
 - input surge current limited
 - brown out protected
- * DC output provisions:
 - complete overload protected
 - overvoltage protected
 - reverse voltage protected
 - low noise outputs

50/60 Watts Up to 4 Outputs

1.5A, 3A, 5A

Available Outputs

Standard Output Voltage Combination	Output 1			Output 2			Output 3			Output 4		
	Volts	Rated Amps	Peak Amps	Volts	Rated Amps	Peak Amps	Volts	Rated Amps	Peak Amps	Volts	Rated Amps	Peak Amps
C	+5	5	6	+12	3	4	-12	1	-	5	1	-
D	+5	5	6	+24	2	2.5	-12	1	-	5	1	-
E	+5	5	6	+12	3	4	-12	1	-	12	1	-
F	+5	5	6	+15	3	4	-15	1	-	5	1	-

Total (sum) of rated DC output power, maximum:

Convection cooling only 50 Watts
 Forced-air cooling (25 CFM) 60 Watts
 Peak Power (10 sec) 65 Watts

* Other output combinations are also available; consult factory
 + Most models; consult factory



