


# Diffuse sensors with background suppression

## OHDM 16P5012/S14

### dimension drawing

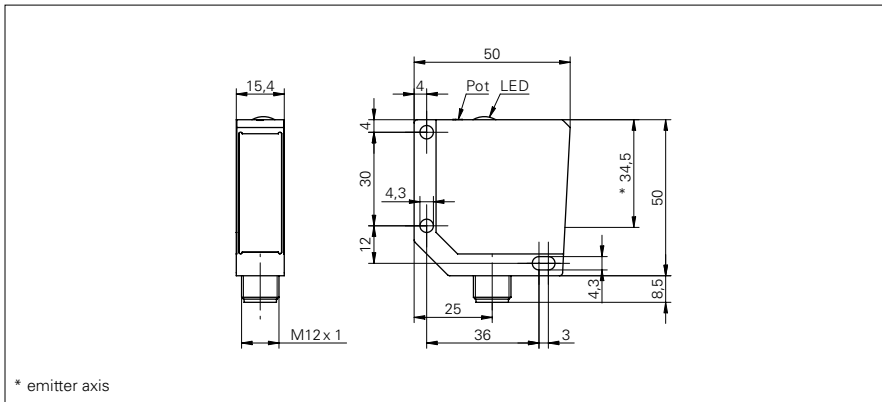

### general data

type	background suppression
light source	pulsed red laser diode
sensing distance $T_w$	25 ... 300 mm
sensing range $T_b$ (at $T_w$ max.)	40 ... 300 mm
sensing range $T_b$ (at $T_w$ min.)	5 ... 25 mm
repeat accuracy	< 0,1 mm at laser focus
output indicator	LED yellow
sensing distance adjustment	mechanical, 8 turn
laser class	2
distance to focus	60 mm
wave length	650 nm

### electrical data

response time / release time	< 0,1 ms
voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	35 mA
current consumption typ.	25 mA
voltage drop $V_d$	< 2 VDC
output function	light / dark operate
output circuit	PNP
output current	< 200 mA
short circuit protection	yes
reverse polarity protection	yes

### mechanical data

width / diameter	15,4 mm
height / length	50 mm
depth	50 mm
type	rectangular
housing material	die-cast zinc
front (optics)	glass
connection types	connector M12 4 pin


### ambient conditions

operating temperature	-10 ... +50 °C
protection class	IP 67

### photo



### connection diagram

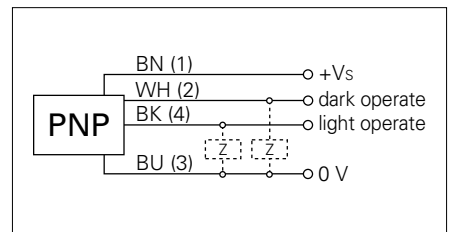

### laser warning

