

Absolute encoders - bus interfaces

EX approval ATEX EEx d IIC T6

Optical multiturn encoders 18 bit ST / 14 bit MT

X 700 - CANopen



X 700 with CANopen

Features

- Encoder multiturn / CANopen / ATEX
- Optical sensing
- Resolution: singleturn 18 bit, multiturn 14 bit
- Clamping flange with shaft $\varnothing 10$ mm
- Explosion protection per EEx d IIC T6
- Area of application: EX I/II 2 GD
- Device class 2 / zone 1 (gas), zone 21 (dust)
- Galvanic isolation

Technical data - electrical ratings

Voltage supply	10...30 VDC
Reverse polarity protection	Yes
Consumption w/o load	≤ 50 mA (24 VDC)
Initializing time (typ.)	250 ms after power on
Interface	CANopen
Function	Multiturn
Transmission rate	10...1000 kBaud
Operating mode	Event-triggered / Time-triggered Remotely-requested Sync (cyclic) / Sync (acyclic)
Identifier	11 bit
Steps per turn	≤ 262144 / 18 bit
Number of turns	≤ 16384 / 14 bit
Absolute accuracy	$\pm 0.025^\circ$
Sensing method	Optical
Code	Binary
Code sequence	CW/CCW programmable
Output circuit	CAN bus standard ISO / DIS 11898
Interference immunity	DIN EN 61000-6-2
Emitted interference	DIN EN 61000-6-4
Programmable parameters	Operating modes Total resolution Scaling Rotation speed monitoring
Diagnostic functions	Position or parameter error Multiturn sensing
Approval	UL approval / E301461

Technical data - mechanical design

Dimensions (flange)	$\varnothing 70$ mm
Shaft	$\varnothing 10$ mm (clamping flange)
Flange	Clamping flange
Protection DIN EN 60529	IP 67
Operating speed	≤ 6000 rpm (mechanical) ≤ 6000 rpm (electric)
Starting torque	≤ 0.4 Nm
Shaft loading	≤ 60 N axial ≤ 50 N radial
Materials	Housing: stainless steel Flange: stainless steel
Operating temperature	$-25...+60^\circ\text{C}$
Relative humidity	95 % non-condensing
Resistance	DIN EN 60068-2-6 Vibration 10 g, 16-2000 Hz DIN EN 60068-2-27 Shock 200 g, 6 ms
Weight approx.	1300 g
Connection	Cable 2 m (other length upon request)

Absolute encoders - bus interfaces

EX approval ATEX EEx d IIC T6

Optical multiturn encoders 18 bit ST / 14 bit MT

X 700 - CANopen

Part number

X 700.P

1

					Interface
			05		CANopen DSP 406/ 10-core cable
			15		CANopen DSP 417 / 10-core cable
			A5		CANopen DSP 406 / 5-core cable
			B5		CANopen DSP 417 / 5-core cable
					Connection
			12		Cable 2 m, axial
			19		Cable 20 m, axial
					Voltage supply / signals
			1		10...30 VDC / 13 + 16 bit
			3		10...30 VDC / 18 + 14 bit
					Flange / Shaft
			1		Clamping flange / ø10 mm IP 67

CD with file descriptions is not included in the delivery. You may order them on CD as accessory free-of-charge.

Accessories

Programming accessories

Z 150.022 CD with describing files & manuals

CANopen features

Bus protocol	CANopen
Device profile	CANopen - CiA DSP 406, CANopen - CiA DSP 417 (Device Class 2, CAN 2.0B)
Operating modes	Event-triggered / Time-triggered Remotely-requested Sync (cyclic) / Sync (acyclic)
Preset	Parameter for setting the encoder to a requested position value assigned to a defined shaft position of the system. The offset of encoder zero point and mechanical zero point is stored in the encoder.
Rotating direction	Parameter for defining the rotating direction in which there have to be ascending or descending position values.
Scaling	Parameter defining the steps per turn as well as the total resolution.
Diagnosis	The encoder supports the following error warnings: - Position and parameter error - Lithium battery voltage control (Multiturn)
Node Monitoring	Heartbeat or Nodeguarding
Default	DSP 406 50 kbit/s, Node ID 1 DSP 417 250 kbit/s, Node ID 4

Absolute encoders - bus interfaces


EX approval ATEX EEx d IIC T6

Optical multiturn encoders 18 bit ST / 14 bit MT

X 700 - CANopen

Terminal significance		Terminal assignment		
UB	Encoder voltage supply	Core colour	Assignment 05/15	Assignment A5/B5
GND B	Encoder ground connection relating to UB	brown	UB (IN)	UB
CAN_L	CAN bus signal (dominant Low)	white	GNDB (IN)	GND
CAN_H	CAN bus signal (dominant High)	green	CAN_H (IN)	CAN_H
CAN_GND	GND relating to CAN interface. Separated from GND B either by galvanic isolation.	yellow	CAN_L (IN)	CAN_L
		black	CAN_GND (IN)	–
		red	UB (OUT)	–
		blue	GNDB (OUT)	–
		grey	CAN_H (OUT)	CAN GND
		pink	CAN_L (OUT)	–
		violet	CAN_GND (OUT)	–

Dimensions

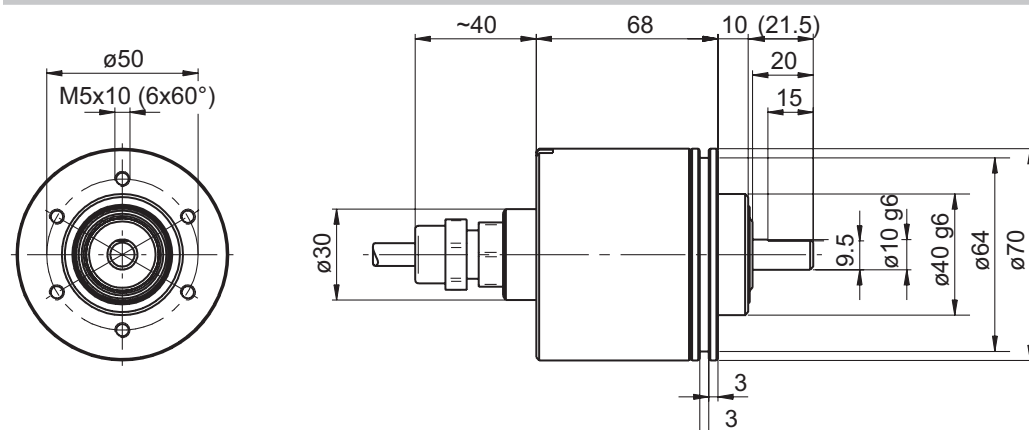

Check list for EX-approval

In compliance with EU standards 94/9/EG for potentially explosive areas it is imperative that the present checklist is duly completed and that all pending questions relating to explosion protection and application are clarified.

Company: _____
Address: _____
Division: _____
In charge: _____
Phone: _____ Fax: _____
e-mail: _____

Product name:	Version:	Resolution (ppr / code):	Supply voltage:
Kind of e-connection:	Length of cable (m):	Output circuit:	Special options:

Responsibility

- Our customer will receive all relevant information to verify a correct application.
- Our customer has to clarify all relevant criterions and characteristics.
- The operator shall be responsible for not exceeding the maximum performance limits of our devices (see data sheet).

Device utilization/application (E.g.: Lacquering line, manufacturing tech., gas storing vessel etc.)

Device group, device category and zone classification

Device group	please tick
Device group I	<input type="checkbox"/>
Device group II	<input type="checkbox"/>

Category / Zone	Ex-atmosphere prevailing	
Category 1 (= Zone 0/20)	... permanently, long-term or frequently	<input type="checkbox"/>
Category 2 (= Zone 1/21)	... only now and then	<input type="checkbox"/>
Category 3 (= Zone 2/22)	... rarely or seldom	<input type="checkbox"/>

Zone classification	
G (gases)	Zone 0, zone 1, zone 2 <input type="checkbox"/>
D (dusts)	Zone 20, zone 21, zone 22 <input type="checkbox"/>

Absolute encoders - bus interfaces

EX approval ATEX EEx d IIC T6

Optical multiturn encoders 18 bit ST / 14 bit MT

X 700 - CANopen

Check list for EX-approval

Ignition protection

please tick

Ex d	Flameproof (pressure-proof capsule)	<input type="checkbox"/>
Ex ia	Intrinsic safety	<input type="checkbox"/>
Ex ib	Intrinsic safety	<input type="checkbox"/>

Gas explosion group

Gases are classified into explosion groups. Danger increases from group II A to II C.

please tick

II A	Propane	<input type="checkbox"/>
II B	Ethylene	<input type="checkbox"/>
II C	Hydrogen, Acetylene	<input type="checkbox"/>

Temperature classes and groups of explosion

Temperature class	Max. surface temperature of operating equipment (°C)	Max. ignition temperature of combustible substances (°C)	please tick
T1	450	> 450	void
T2	300	>300...< 450	void
T3	200	>200...< 300	void
T4	135	>135...< 200	<input type="checkbox"/>
T5	100	>100...< 135	void
T6	85	> 85...< 100	<input type="checkbox"/>

Information on ambient and operating temperature

Expected operating temperature:	to be clarified
Field ambient temperature:	to be clarified

Mechanical strain

Rotation speed (rpm)
Axial shaft load (N)
Radial shaft load (N)
Ambient impacts (salt, lye, etc.)

Date

Signature

Stamp:

Date

Release EExB / trained sales