


Accessories

Connectors and cables

Cable, 10-wire, shielded, voltage supply and I/Os

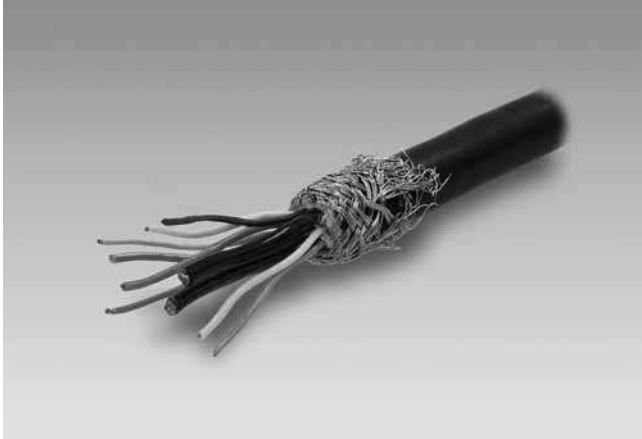

Features

- Cable (shielded) in different lengths
- Cable for use in drag chains
- Halogen-free
- Resistant against oil
- UL/cUL approval

Part number

11002151 Cable, 10-wire, shielded, voltage supply and I/Os

Suitable for

MSIA 42, MSIA 53, MSIA 68, MSIA 83

Technical data

Cable type	LIF12YC11Y (2x2.5 mm ² / 2x0.34 mm ² / 3x2x0.25 mm ²)
Bending radius	In motion: min. 55 mm
Outer diameter	<11 mm
Operating temperature	-40...+80 °C (in motion) -50...+80 °C (static)
Isolation resistance	>20 MΩ x km
Material	Cable jacket: PUR black