



XPT IGBT

Copack

$$\begin{aligned} I_{C25} &= 38 \text{ A} \\ V_{CES} &= 1200 \text{ V} \\ V_{CE(sat)typ} &= 1.8 \text{ V} \end{aligned}$$

Part number

IXA20IF1200HB



Features / Advantages:

- Easy paralleling due to the positive temperature coefficient of the on-state voltage
- Rugged XPT design (Xtreme light Punch Through) results in:
 - short circuit rated for 10 μ sec.
 - very low gate charge
 - low EMI
 - square RBSOA @ 3x I_C
- Thin wafer technology combined with the XPT design results in a competitive low $V_{CE(sat)}$
- SONIC™ diode
 - fast and soft reverse recovery
 - low operating forward voltage

Applications:

- AC motor drives
- Solar inverter
- Medical equipment
- Uninterruptible power supply
- Air-conditioning systems
- Welding equipment
- Switched-mode and resonant-mode power supplies
- Inductive heating, cookers

Package:

- Housing: TO-247
- Industry standard outline
- Epoxy meets UL 94V-0
- RoHS compliant


IGBT

Symbol	Definition	Conditions		Ratings			Unit
				min.	typ.	max.	
V_{CES}	Collector emitter voltage	$V_{GE} = 0 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$			1200	V
V_{GES}	Maximum DC gate voltage		$T_{VJ} = 25^\circ\text{C}$			± 20	V
I_{C25}	Collector current		$T_C = 25^\circ\text{C}$			38	A
I_{C100}			$T_C = 100^\circ\text{C}$			22	A
P_{tot}	Total power dissipation		$T_{VJ} = 25^\circ\text{C}$			165	W
I_{CES}	Collector emitter leakage current	$V_{CE} = V_{CES} ; V_{GE} = 0 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$			0.1	mA
					0.1		mA
I_{GES}	Gate emitter leakage current	$V_{CE} = 0 \text{ V}; V_{GE} = \pm 20 \text{ V}$				500	nA
$V_{CE(sat)}$	Collector emitter saturation voltage	$I_C = 16 \text{ A}; V_{GE} = 15 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		1.8	2.1	V
					2.1		V
$V_{GE(th)}$	Gate emitter threshold voltage	$I_C = 0.6 \text{ mA}; V_{GE} = V_{CE}$		5.4	6	6.5	V
Q_{Gon}	Total gate charge	$V_{CE} = 600 \text{ V}; V_{GE} = 15 \text{ V}; I_C = 15 \text{ A}$			47		nC
$t_{d(on)}$	Turn-on delay time				70		ns
t_r	Current rise time				40		ns
$t_{d(off)}$	Turn-off delay time	Inductive load			250		ns
t_f	Current fall time	$V_{CE} = 600 \text{ V}; I_C = 15 \text{ A}$			100		ns
E_{on}	Turn-on energy per pulse	$V_{GE} = \pm 15 \text{ V}; R_G = 56 \Omega$	$T_{VJ} = 125^\circ\text{C}$		1.55		mJ
E_{off}	Turn-off energy per pulse				1.7		mJ
RBSOA	Reverse bias safe operation area	$V_{GE} = 15 \text{ V}; R_G = 56 \Omega$ $V_{CEK} = 1200 \text{ V}$	$T_{VJ} = 125^\circ\text{C}$			45	A
SCSOA	Short circuit safe operation area						
t_{sc}	Short circuit duration	$V_{CE} = 900 \text{ V}; V_{GE} = \pm 15 \text{ V}$	$T_{VJ} = 125^\circ\text{C}$			10	μ s
I_{sc}	Short circuit current	$R_G = 56 \Omega$; non-repetitive				60	A
R_{thJC}	Thermal resistance junction to case					0.76	K/W


Diode

Symbol	Definition	Conditions	Ratings			Unit
			min.	typ.	max.	
I_{F25}	Forward current	$T_C = 25^\circ\text{C}$			45	A
I_{F100}		$T_C = 100^\circ\text{C}$			24	A
V_F	Forward voltage	$I_F = 20\text{ A}$		$T_{VJ} = 25^\circ\text{C}$	2.2	V
				$T_{VJ} = 125^\circ\text{C}$	1.95	V
Q_{rr}	Reverse recovery charge	$V_R = 600\text{ V}$		3		μC
I_{RM}	Maximum reverse recovery current	$di_F/dt = -400\text{ A}/\mu\text{s}$		20		A
t_{rr}	Reverse recovery time	$I_F = 20\text{ A}$		350		ns
$E_{rec(off)}$	Reverse recovery losses at turn-off			0.7		mJ
R_{thJC}	Thermal resistance junction to case				0.9	K/W

Equivalent Circuits for Simulation



Symbol	Definition		Ratings			Unit
			min.	typ.	max.	
V_0	IGBT	$T_{VJ} = 150^\circ\text{C}$			1.1	V
R_0					86	m Ω
V_0	Diode	$T_{VJ} = 150^\circ\text{C}$			1.25	V
R_0					42.5	m Ω




$$Z_{th}(t) = \sum_{i=1}^n \left[R_i \cdot \left(1 - \exp\left(-\frac{t}{\tau_i}\right) \right) \right]$$

$$\tau_i = R_i \cdot C_i$$

	IGBT	Diode
R_1	0.15	0.231
R_2	0.28	0.212
R_3	0.16	0.19
R_4	0.17	0.267
τ_1	0.0006	0.0005
τ_2	0.2	0.004
τ_3	0.006	0.02
τ_4	0.05	0.15

Package TO-247

Symbol	Definition	Conditions	Ratings			
			min.	typ.	max.	Unit
T_{vj}	Virtual junction temperature		-55		150	°C
T_{stg}	Storage temperature		-55		150	°C
R_{thCH}	Thermal resistance case to heatsink			0.25		K/W
Weight				6		g
M_D	Mounting torque		0.8		1.2	Nm
F_c	Mounting force with clip		20		120	N

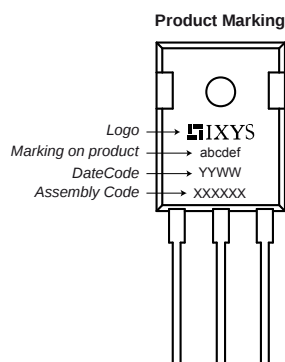


Part number

I = IGBT
 X = XPT IGBT
 A = Gen 1 / std
 20 = Current Rating [A]
 IF = Copack
 1200 = Reverse Voltage [V]
 HB = TO-247AD (3)

Ordering	Part Name	Marking on Product	Delivering Mode	Base Qty	Code Key
Standard	IXA 20 IF 1200 HB	IXA20IF1200HB	Tube	30	508460

Similar Part	Package	Voltage class
IXA20I1200PB	TO-220AB (3)	1200

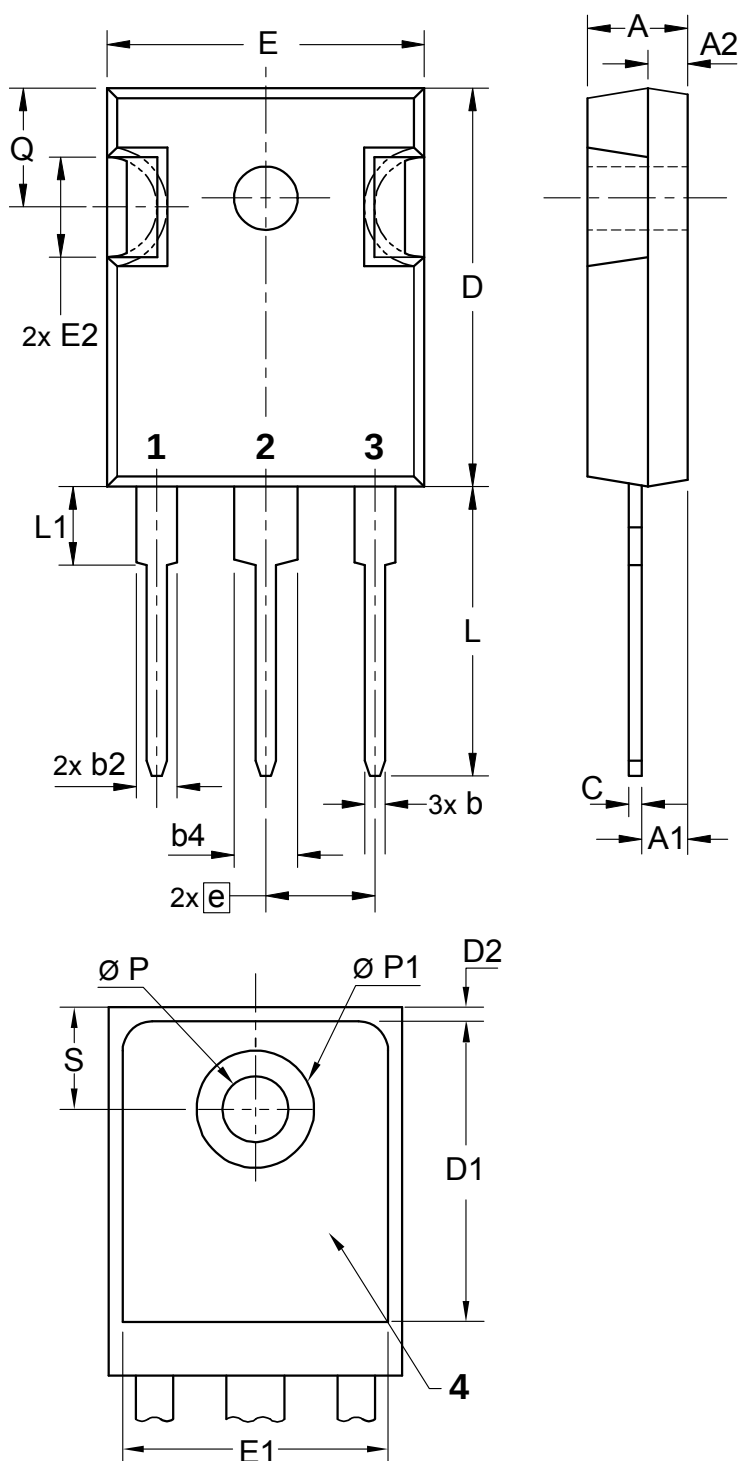

Sym.	Inches		Millimeter	
	min.	max.	min.	max.
A	0.185	0.209	4.70	5.30
A1	0.087	0.102	2.21	2.59
A2	0.059	0.098	1.50	2.49
D	0.819	0.845	20.79	21.45
E	0.610	0.640	15.48	16.24
E2	0.170	0.216	4.31	5.48
e	0.215 BSC		5.46 BSC	
L	0.780	0.800	19.80	20.30
L1	-	0.177	-	4.49
Ø P	0.140	0.144	3.55	3.65
Q	0.212	0.244	5.38	6.19
S	0.242 BSC		6.14 BSC	
b	0.039	0.055	0.99	1.40
b2	0.065	0.094	1.65	2.39
b4	0.102	0.135	2.59	3.43
c	0.015	0.035	0.38	0.89
D1	0.515	-	13.07	-
D2	0.020	0.053	0.51	1.35
E1	0.530	-	13.45	-
Ø P1	-	0.29	-	7.39

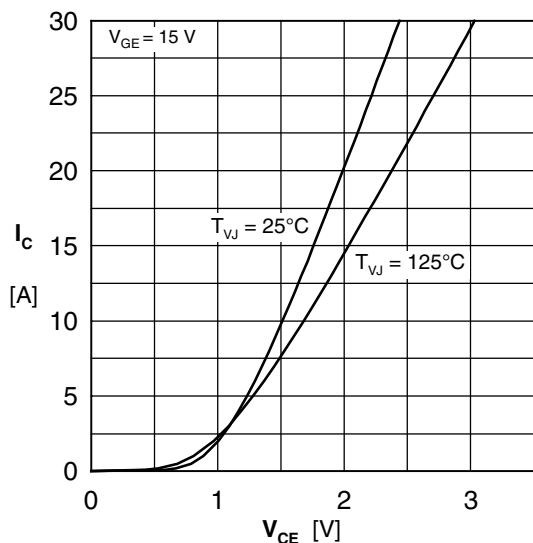


Fig. 1 Typ. output characteristics

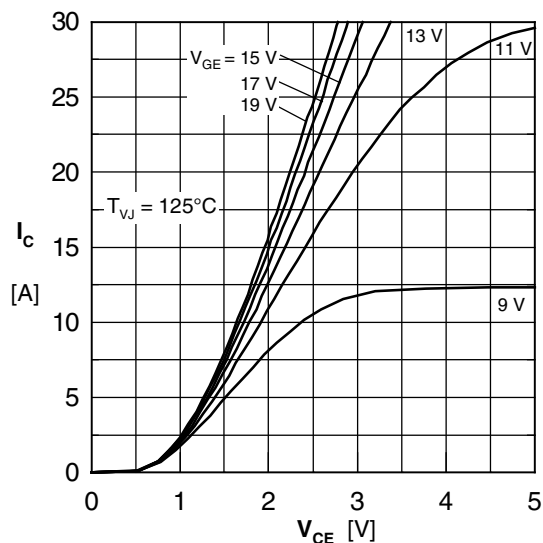


Fig. 2 Typ. output characteristics

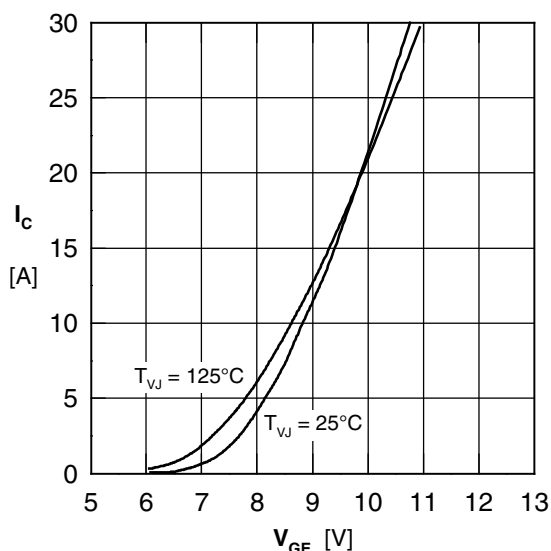


Fig. 3 Typ. transfer characteristics

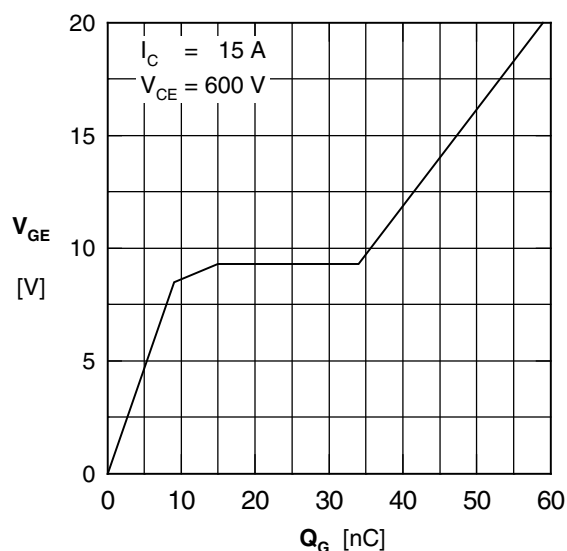


Fig. 4 Typ. turn-on gate charge

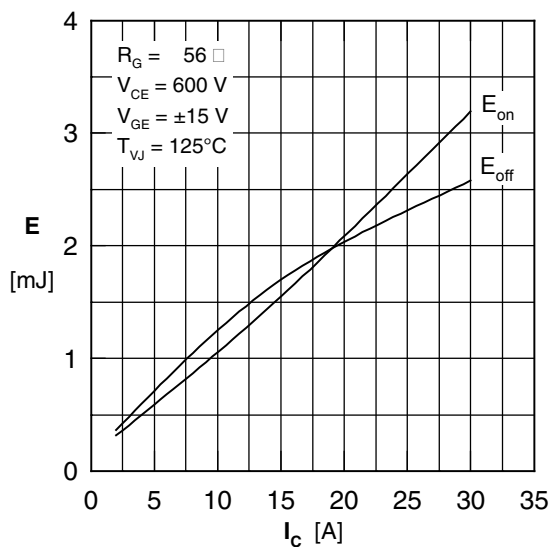


Fig. 5 Typ. switching energy vs. collector current

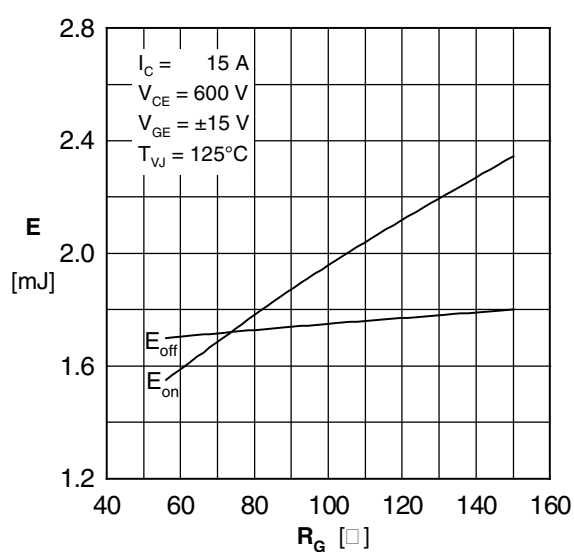


Fig. 6 Typ. switching energy vs. gate resistance

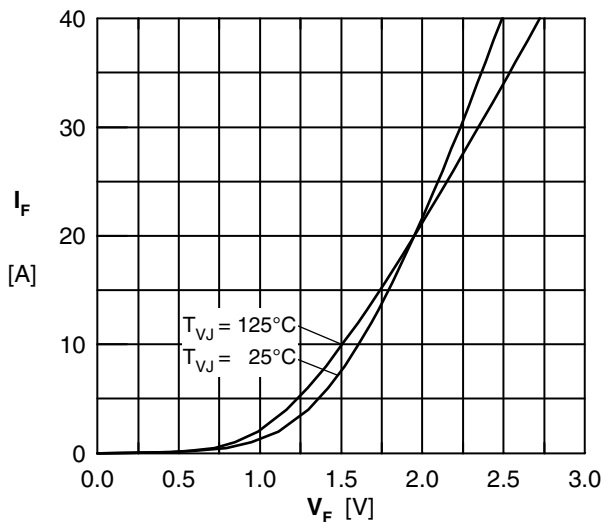


Fig. 7 Typ. Forward current versus V_F

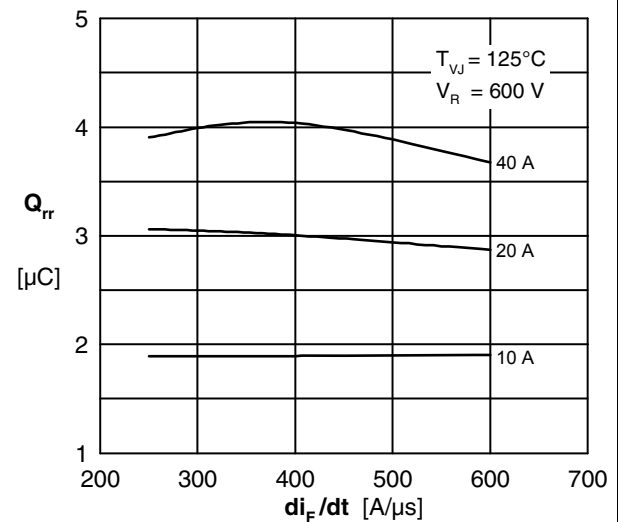


Fig. 8 Typ. reverse recov.charge Q_{rr} vs. di/dt

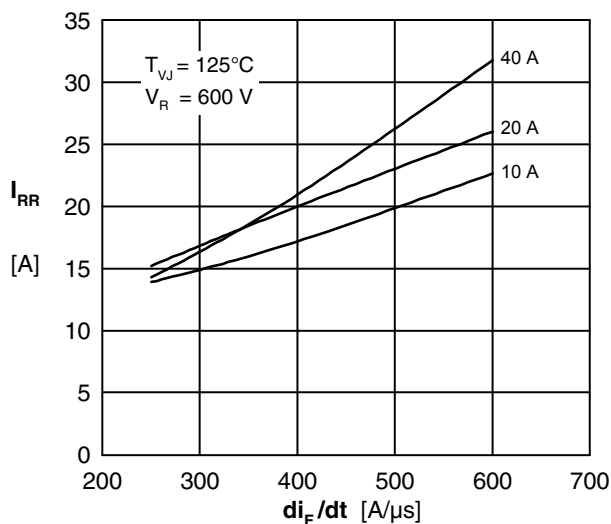


Fig. 9 Typ. peak reverse current I_{RM} vs. di/dt

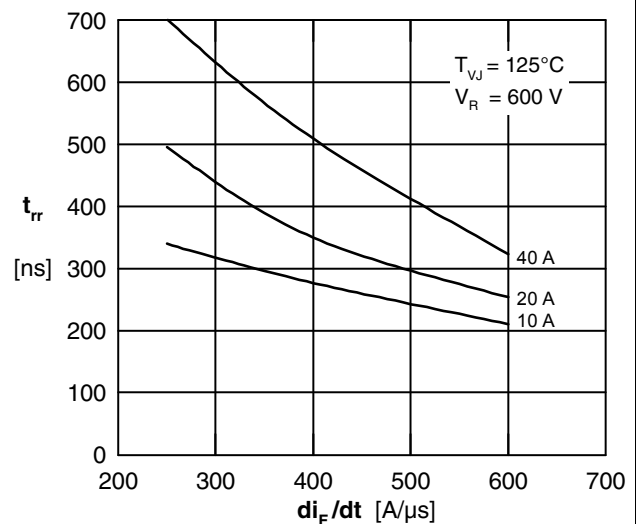


Fig. 10 Typ. recovery time t_{rr} versus di/dt

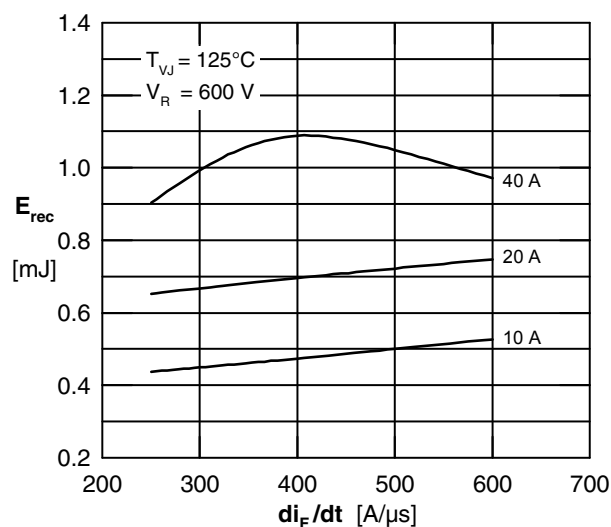


Fig. 11 Typ. recovery energy E_{rec} versus di/dt

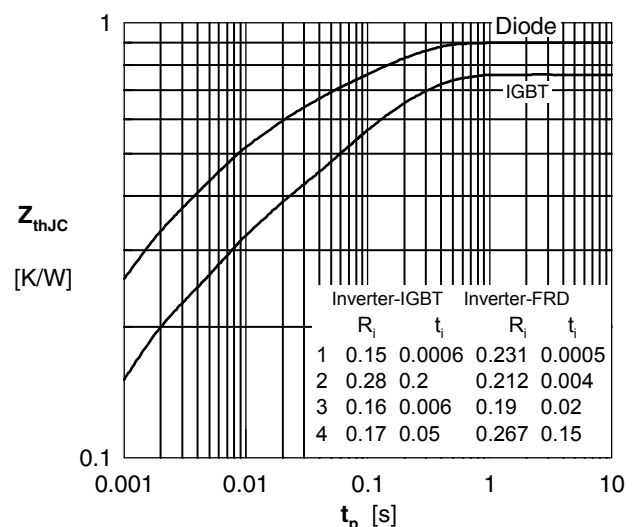


Fig. 12 Typ. transient thermal impedance