

IGBT Modules



Sixpack

$$I_{C60} = 475 \text{ A}$$

$$V_{CES} = 1700 \text{ V}$$

$$V_{CE(sat) \text{ typ}} = 2.25 \text{ V}$$

Preliminary data

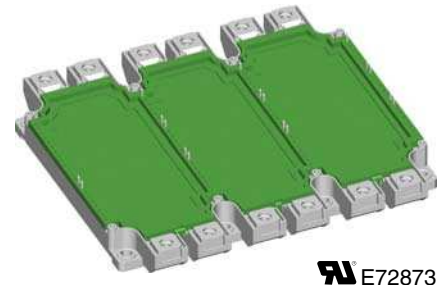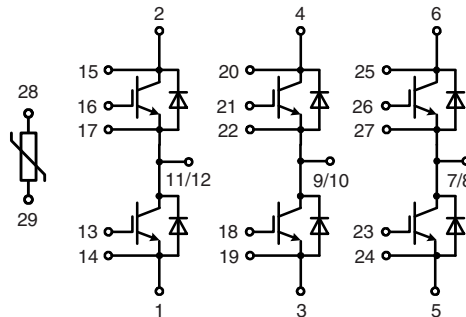

E72873

See outline drawing for pin arrangement

IGBTs					
Symbol	Conditions	Maximum Ratings			
V_{CES}	$T_{VJ} = 25^{\circ}\text{C}$ to 125°C	1700	V		
V_{GES}		± 20	V		
I_{C25}	$T_C = 25^{\circ}\text{C}$	580	A		
I_{C60}	$T_C = 60^{\circ}\text{C}$	475	A		
I_{C80}	$T_C = 80^{\circ}\text{C}$	405	A		
RBSOA	$R_G = 3.3\ \Omega$; $T_{VJ} = 125^{\circ}\text{C}$ Clamped inductive load; $L = 100\ \mu\text{H}$	$I_{CM} = 750$ $V_{CEK} \leq V_{CES}$	A		
t_{SC} (SCSOA)	$V_{CE} = 1200\text{ V}$; $V_{GE} = \pm 15\text{ V}$; $R_G = 3.3\ \Omega$; $T_{VJ} = 125^{\circ}\text{C}$; non-repetitive; $V_{CEmax} \leq V_{CES}$	10	μs		
P_{tot}	$T_C = 25^{\circ}\text{C}$	2.2	kW		
Symbol	Conditions	Characteristic Values ($T_{VJ} = 25^{\circ}\text{C}$, unless otherwise specified)			
		min.	typ.	max.	
$V_{CE(sat)}$	$I_C = 450\text{ A}$; $V_{GE} = 15\text{ V}$; $T_{VJ} = 25^{\circ}\text{C}$ $T_{VJ} = 125^{\circ}\text{C}$		2.25 2.65	2.65 3.0	
$V_{GE(th)}$	$I_C = 30\text{ mA}$; $V_{GE} = V_{CE}$	5		7	
I_{CES}	$V_{CE} = V_{CES}$; $V_{GE} = 0\text{ V}$; $T_{VJ} = 25^{\circ}\text{C}$ $T_{VJ} = 125^{\circ}\text{C}$		9	1 26	
I_{GES}	$V_{CE} = 0\text{ V}$; $V_{GE} = \pm 20\text{ V}$			1.5	
$t_{d(on)}$ t_r $t_{d(off)}$ t_f E_{on} E_{off}	Inductive load, $T_{VJ} = 125^{\circ}\text{C}$ $V_{CE} = 900\text{ V}$; $I_C = 450\text{ A}$ $V_{GE} = \pm 15\text{ V}$; $R_G = 3.3\ \Omega$		100 90 470 400 90 90	ns ns ns ns mJ mJ	
C_{ies}		$V_{CE} = 25\text{ V}$; $V_{GE} = 0\text{ V}$; $f = 1\text{ MHz}$		33	nF
Q_{Gon}		$V_{CE} = 900\text{ V}$; $V_{GE} = 15\text{ V}$; $I_C = 300\text{ A}$		2.6	μC
R_{thJC}					0.057 K/W

Features

- NPT[®] IGBT technology
- low saturation voltage
- low switching losses
- square RBSOA, no latch up
- high short circuit capability
- positive temperature coefficient for easy parallelling
- MOS input, voltage controlled
- ultra fast free wheeling diodes
- solderable pins for PCB mounting
- package with copper base plate

Advantages

- space savings
- reduced protection circuits
- package designed for wave soldering

Typical Applications

- AC motor control
- AC servo and robot drives
- power supplies

Recommended replacement:
MWI 450-17T9

IXYS reserves the right to change limits, test conditions and dimensions.

20070912a

© 2007 IXYS All rights reserved

1 - 4

Diodes

Symbol	Conditions	Maximum Ratings	
I_{F80}	$T_C = 80^\circ\text{C}$	450	A
I_{FRM}	$t_p = 1\text{ ms}$	900	A
I^2t	$T_{VJ} = 125^\circ\text{C}; t = 10\text{ ms}; V_R = 0\text{ V}$	35000	A^2s

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
V_F	$I_F = 450\text{ A}; V_{GE} = 0\text{ V}; T_{VJ} = 25^\circ\text{C}$			2.2 V
I_{RM}	$I_F = 450\text{ A}; di_F/dt = 3500\text{ A}/\mu\text{s}; T_{VJ} = 125^\circ\text{C}; V_R = 1200\text{ V}$		400	A
R_{thJC}			0.075	K/W

Temperature Sensor NTC

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
R_{25}	$T = 25^\circ\text{C}$	4.75	5.0	5.25 k Ω
$B_{25/50}$			3375	K


Module

Symbol	Conditions	Maximum Ratings	
T_{VJ}	operating	-40...+125	$^\circ\text{C}$
T_{JM}		+150	$^\circ\text{C}$
T_{stg}		-40...+125	$^\circ\text{C}$
V_{ISOL}	$I_{ISOL} \leq 1\text{ mA}; 50/60\text{ Hz}$	3400	V~
M_d	Mounting torque (M5)	3 - 6	Nm
	Terminal connection torque (M6)	3 - 6	Nm

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
$R_{term-chip}^{*)}$	Resistance terminal to chip		0.55	m Ω
d_s	Creepage distance on surface	12.7		mm
d_A	Strike distance in air	10		mm
R_{thCH}	with heatsink compound		0.01	K/W
Weight			900	g

*) $V = V_{CE(sat)} + 2x R_{term-chip} \cdot I_C$ resp. $V = V_F + 2x R_{term-chip} \cdot I_F$

Dimensions in mm (1 mm = 0.0394")

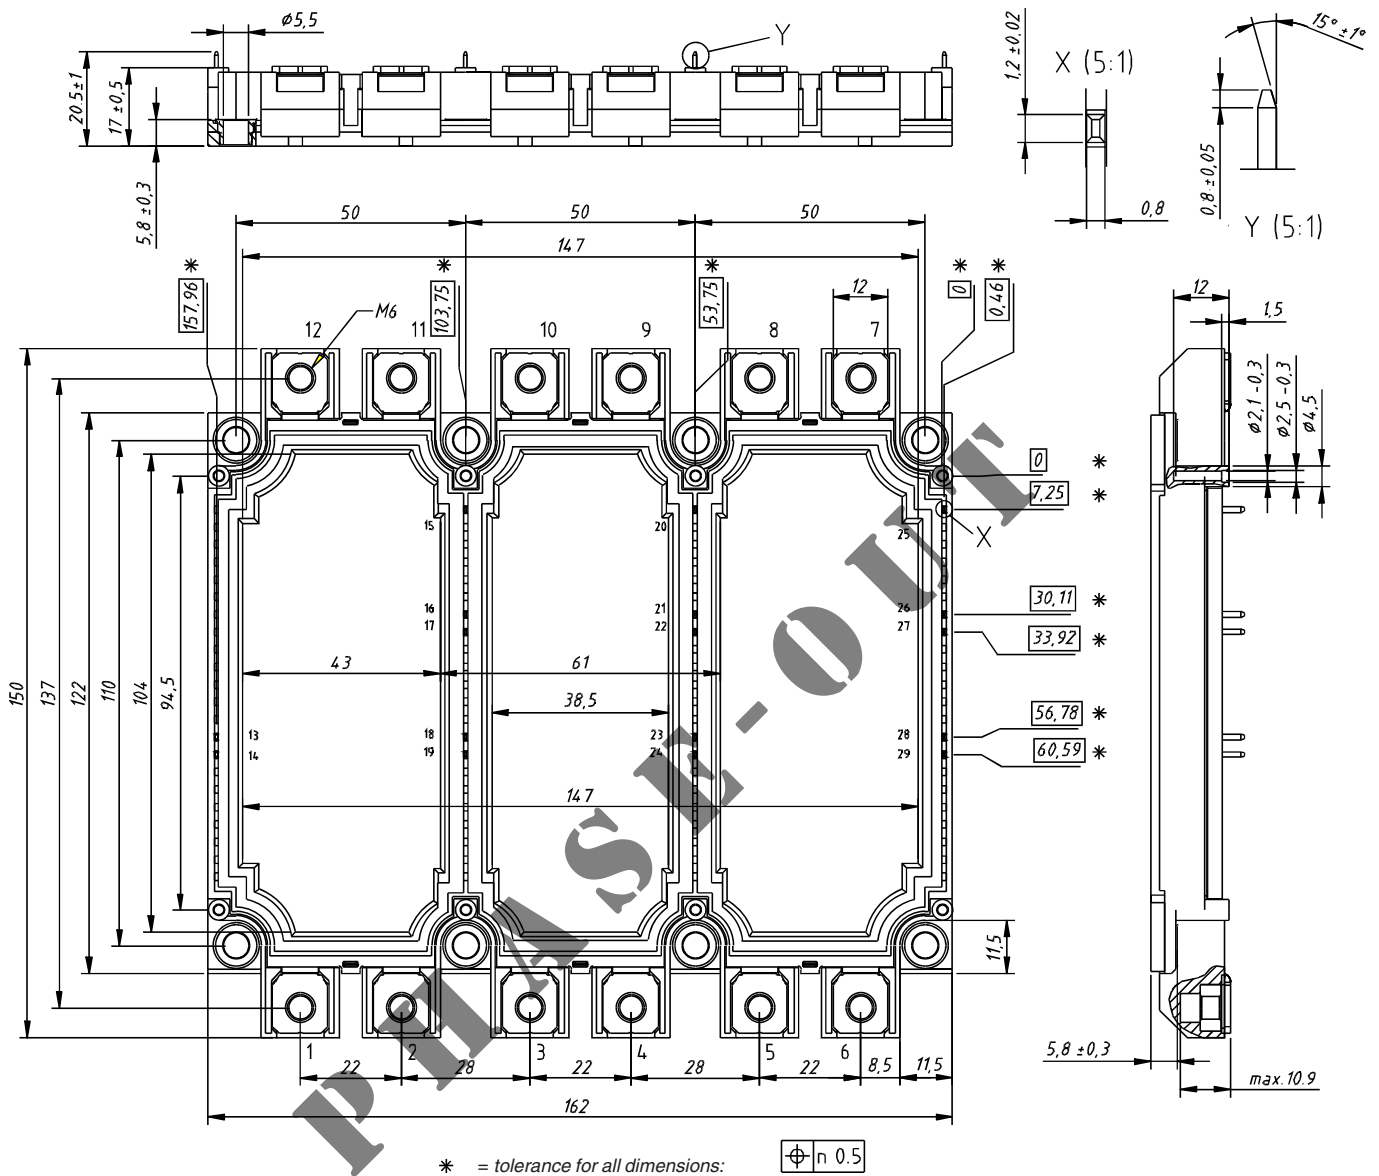

IXYS reserves the right to change limits, test conditions and dimensions.

20070912a

© 2007 IXYS All rights reserved

3 - 4

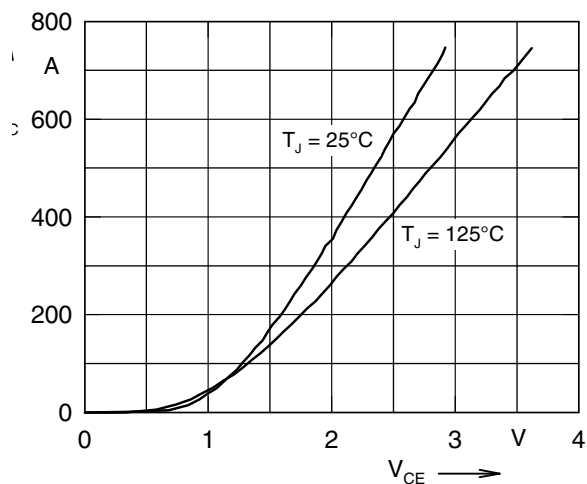


Fig. 1 Typ. output characteristics

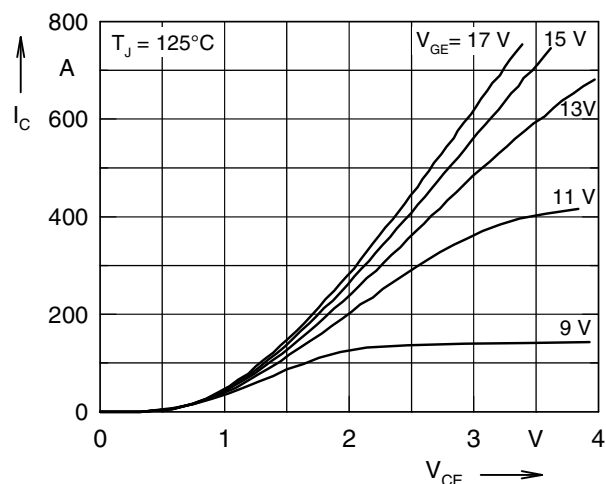


Fig. 2 Typ. output characteristics

PHASE-OUT