



EVERLIGHT ELECTRONICS CO., LTD.

Device Number : CDLE-125-062

REV: 1

3.0mm Round Type LED Lamps

MODEL NO : 1254SYGD/S530-E2

ECN :

Page: 1/4


■ Features :

- LOW POWER CONSUMPTION.
- LONG LIFE FEATURE
- RELIABLE AND RUGGED

■ Description :

- The LED lamp is available with a choice of different colors, light intensities, epoxy colors, etc.

■ Package Dimension:

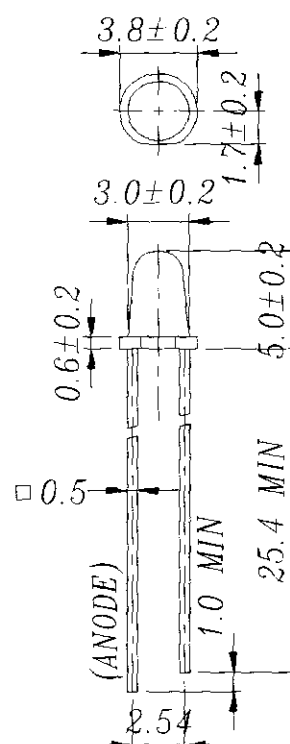

■ Applications :

- Audio Equipment
- Monitor
- Car meter
- Computer

■ NOTES :

1. All dimensions are millimeters (inch), tolerance is 0.25 mm except be specified.
2. An epoxy meniscus may extend about is 1.5mm (0.059") down the lead.

PART NO	CHIP		Lens Color
	Material	Emitted Color	
1254SYGD/S530-E2	AlGaInP	Super Yellow Green	Green Diffused

DESIGNER	CHECKER	APPROVED

Office : 7C Building, Lian Hua Port Industrial District, Lian Hua Shan Bonded Processing Zone Pan Yu, Guang Zhou, China
TEL : (020)84860913, 84860914
FAX : (020)84860600

9901005



EVERLIGHT ELECTRONICS CO., LTD.

Device Number : CDLE-125-062 REV: 1

3.0mm Round Type LED Lamps

MODEL NO : 1254SYGD/S530-E2 ECN : Page: 2/4

■ Absolute Maximum Ratings at $T_A = 25^{\circ}\text{C}$

Parameter	Symbol	Rating	Unit
Forward Current	If	25	mA
Reverse Voltage	Vr	5	V
Reverse Current	Ir	10	μA
Operating Temperature	Topr	-40 to +85	$^{\circ}\text{C}$
Soldering Temperature	Tsol	260 ± 5	$^{\circ}\text{C}$
Power Dissipation	Pd	100	mW
Peak Forward Current(Duty 1/10 @ 1KHZ)	If(Peak)	180	mA

■ Electronic Optical Characteristics :

Parameter	Symbol	MIN.	TYP.	MAX.	Unit	Condition
Luminous intensity	Iv	63.0	160.0	/	mcd	If= 20 mA
Viewing Angle	$2\theta 1/2$	/	30	/	deg	If= 20 mA
Peak Wavelength	λ_p	/	575	/	nm	If= 20 mA
Dominant Wavelength	λ_d	/	573	/	nm	If= 20 mA
Spectrum Radiation Bandwidth	$\Delta\lambda$	/	20	/	nm	If= 20 mA
Forward Voltage	Vf	1.70	2.00	2.40	V	If= 20 mA



EVERLIGHT ELECTRONICS CO., LTD.

Device Number : CDLE-125-062 REV: 1


3.0mm Round Type LED Lamps

MODEL NO : 1254SYGD/S530-E2 ECN : Page: 3/4


■ Typical Electro-Optical Characteristic Curves

<SYG>



Spectrum Distribution

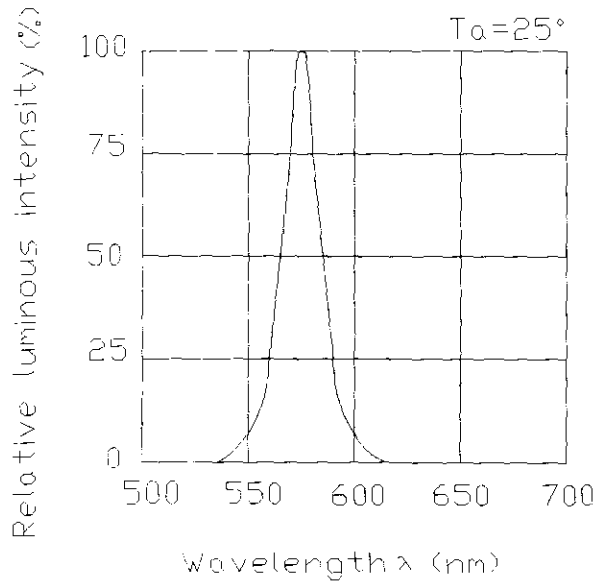

Forward Current vs. Forward Voltage

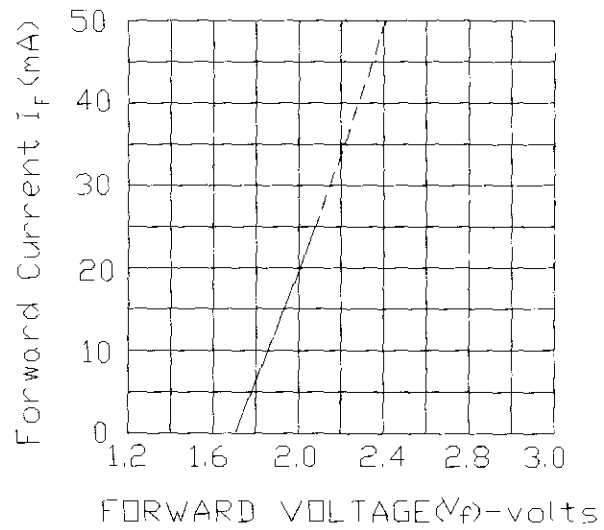

Forward Current Derating Curve

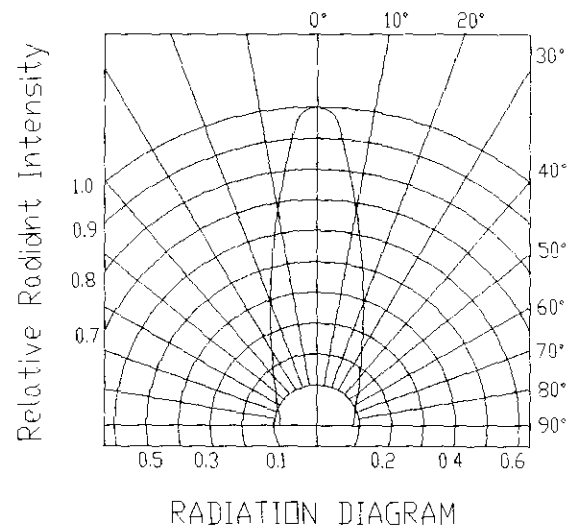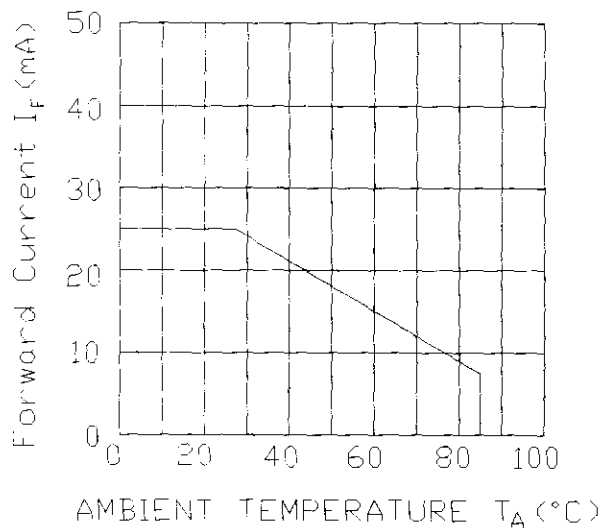



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDLE-125-062 REV: 1

3.0mm Round Type LED Lamps

MODEL NO : 1254SYGD/S530-E2 ECN : Page: 4/4

■ Reliability test item and condition

No	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 Pcs	0/1
2	Temperature Cycle	H : +85°C 30min § 5 min L : -55°C 30min	50 CYCLE	76 Pcs	0/1
3	Thermal Shock	H : +100°C 5min § 10 sec L : -10°C 5min	50 CYCLE	76 Pcs	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 Pcs	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 Pcs	0/1
6	DC Operating Life	If = 20 mA	1000 HRS	76 Pcs	0/1
7	High Temperature / High Humidity	85°C /85% RH	1000 HRS	76 Pcs	0/1