

Technical Data Sheet

204-15/T2C3-4LQA

Features

- Popular T-1 round package.
- High luminous power.
- Typical chromaticity coordinates x=0.30, y=0.29 according to CIE1931.
- Bulk, available taped on reel.
- ESD-withstand voltage: up to 4KV
- The product itself will remain within RoHS compliant version.

Descriptions

- The series is designed for application required high luminous intensity.
- The phosphor filled in the reflector converts the blue emission of InGaN chip to ideal white.



- Message panels
- Optical Indicators
- Backlighting
- Marker Lights

Device Selection Guide

PART NO.	Chip		I 6.1
	Material	Emitted Color	Lens Color
204-15/T2C3-4LQA	InGaN	White	Water Clear



Everlight Electronics Co., Ltd.

http\\:www.everlight.com
Established date:04-13-2009

Rev 1 Page: 1 of 12

Device Number: DLE-0001234

Revision: 1

Established by: Ruby Lin Release Date:2009-04-17 09:07:31.0

Expired Period: Forever


LifecyclePhase:正式發行



Technical Data Sheet

204-15/T2C3-4LQA

Package Dimensions

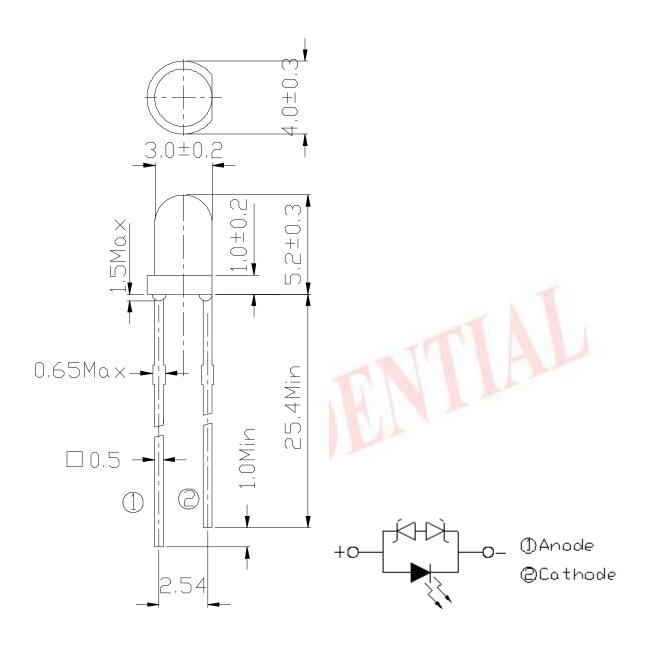

Notes:

- 1.All dimensions are in millimeters, and tolerance is 0.25mm except being specified.
- 2.Lead spacing is measured where the lead emerges from the package.
- 3. Protruded resin under flange is 1.5mm Max. LED.

Everlight Electronics Co., Ltd.

http\\:www.everlight.com

Rev

Page: 2 of 12

Device Number: DLE-0001234

Established date:04-13-2009

Revision : 1

Established by: Ruby Lin Release Date:2009-04-17 09:07:31.0

LifecyclePhase:正式發行

Expired Period: Forever