


Technical Data Sheet

3.68*6.22mm Multi-Color Rectangular Legend LED Lamps

1006SYGSURW/S530-A3

Features :

- Two chips are matched for uniform light output, wide viewing angle
- Long life-solid state reliability
- I.C. compatible/Low power consumption
- Pb free
- The product itself will remain within RoHS compliant version

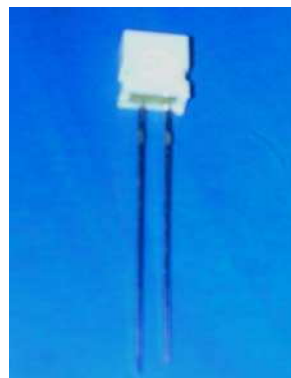

Descriptions :

- The 1006LED lamps contain two integral chips and is available as both bicolor and bipolar types.
- Super Yellow Green and Hyper Red light is emitted by diodes of AlGaInP and AlGaInP
- Type of bicolor lamps are both white diffused and color diffused while the bicolor are water clear.

Applications :

- TV set
- Monitor
- Telephone
- Computer

PART NO.	Chip		Lens Color
	Material	Emitted Color	
1006SYGSURW/S530-A3	AlGaInP	Super Yellow Green	White Diffused
	AlGaInP	Hyper Red	




Technical Data Sheet

3.68*6.22mm Multi-Color Rectangular Legend LED Lamps

1006SYGSURW/S530-A3

Package Dimensions

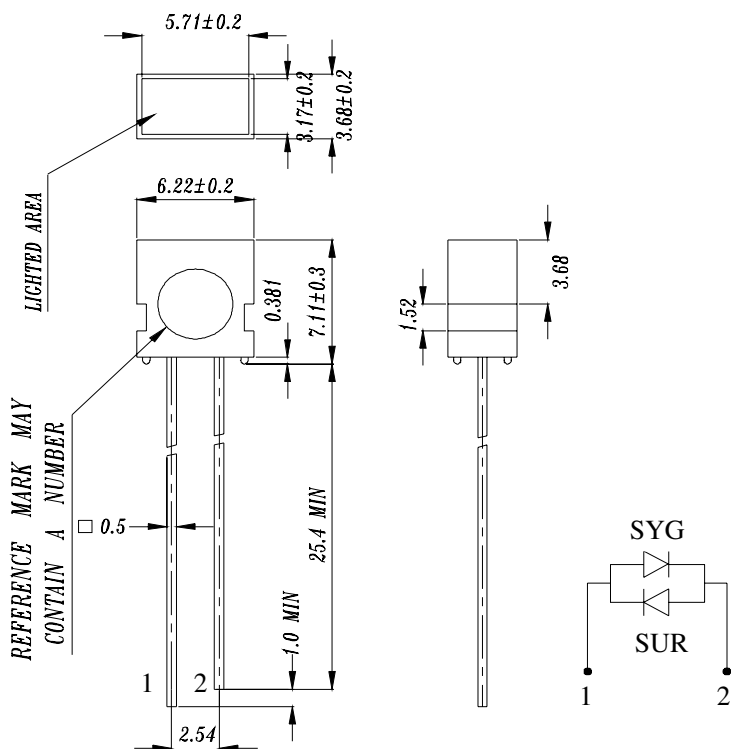

- Notes: 1. All dimensions are in millimetres
2. An epoxy meniscus may extend about 1.5mm(0.059") down to the lead.
3. Tolerances unless Dimension $\pm 0.25\text{mm}$.

Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating		Unit
Forward Current	I_F	SYG/S530	25	mA
		SUR/S530	25	
Operating Temperature	T_{opr}	-40 to +85		$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 to +100		$^\circ\text{C}$
Soldering Temperature	T_{sol}	260 ± 5		$^\circ\text{C}$
Electrostatic Discharge	ESD	SYG/S530	2000	V
		SUR/S530	2000	
Power Dissipation	P_d	SYG/S530	60	mW
		SUR/S530	60	
Reverse Voltage	V_R	5		V

Note: *1: Soldering time ≤ 5 seconds.



Technical Data Sheet

3.68*6.22mm Multi-Color Rectangular Legend LED Lamps

1006SYGSURW/S530-A3

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol		Condition	Min.	Typ.	Max.	Unit
Forward Voltage	SYG/S530	V_F	$I_F = 20 \text{ mA}$	/	2.0	2.4	V
	SUR/S530			/	2.0	2.4	
Reverse Current	SYG/S530	I_R	$V_R = 5 \text{ V}$	/	/	10	μA
	SUR/S530			/	/	10	
Luminous Intensity	SYG/S530	I_v	$I_F = 20 \text{ mA}$	10	20	/	mcd
	SUR/S530			25	50	/	
Viewing Angle		$2\theta_{1/2}$	$I_F = 20 \text{ mA}$	/	120	/	deg
Peak Wavelength	SYG/S530	λ_p	$I_F = 20 \text{ mA}$	/	575	/	nm
	SUR/S530			/	632	/	
Dominant Wavelength	SYG/S530	λ_d	$I_F = 20 \text{ mA}$	/	573	/	nm
	SUR/S530			/	624	/	
Spectrum Radiation Bandwidth	SYG/S530	$\Delta\lambda$	$I_F = 20 \text{ mA}$	/	20	/	nm
	SUR/S530			/	20	/	









Technical Data Sheet

3.68*6.22mm Multi-Color Rectangular Legend LED Lamps

1006SYGSURW/S530-A3

Typical Electro-Optical Characteristic Curves:

(SYG)

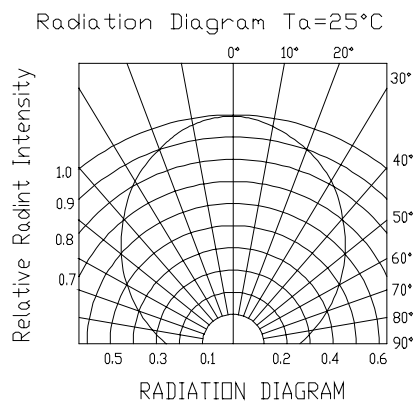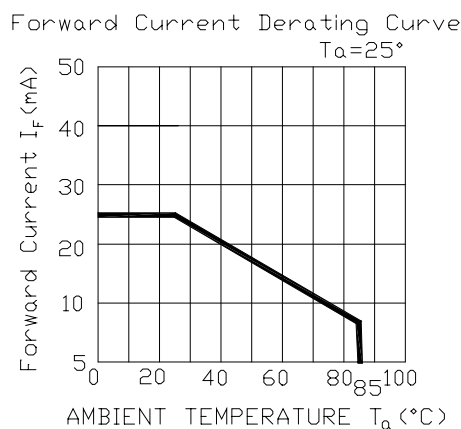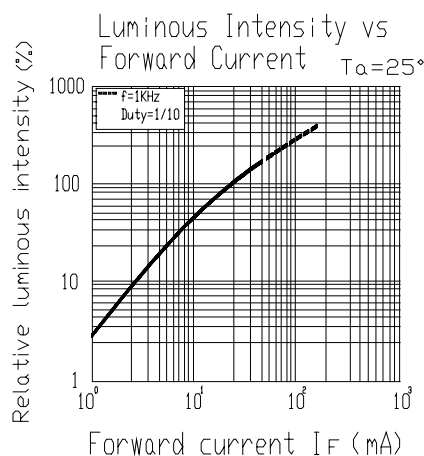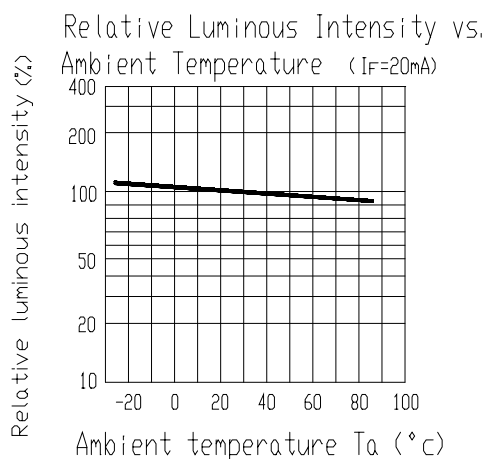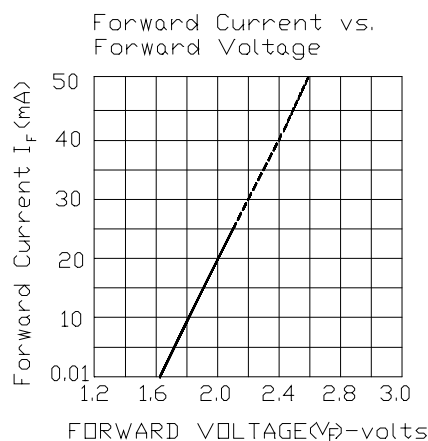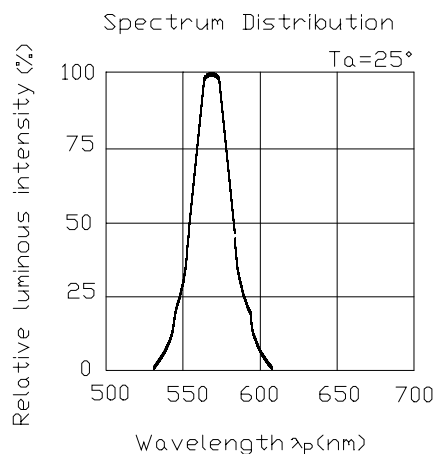









Technical Data Sheet

3.68*6.22mm Multi-Color Rectangular Legend LED Lamps

1006SYGSURW/S530-A3

Typical Electro-Optical Characteristic Curves:

(SUR)

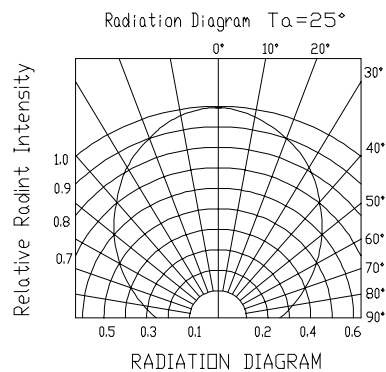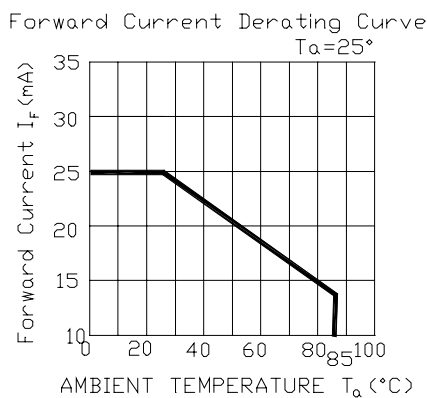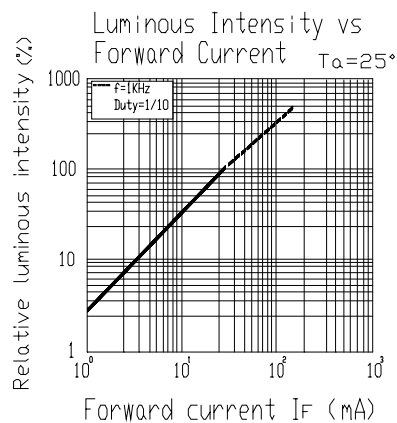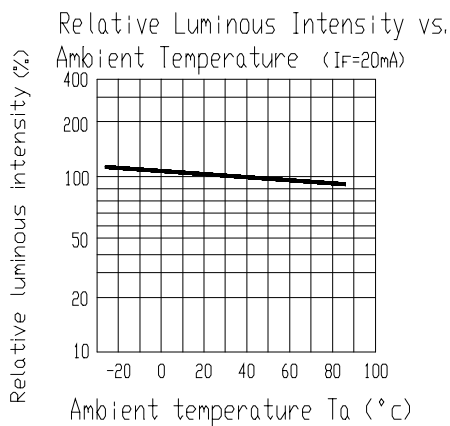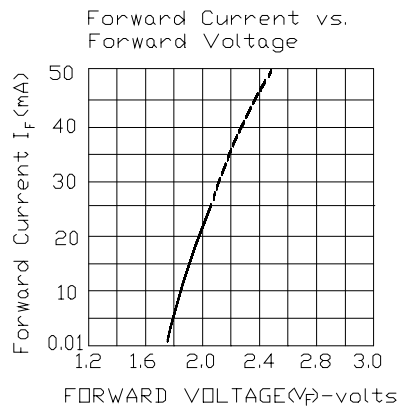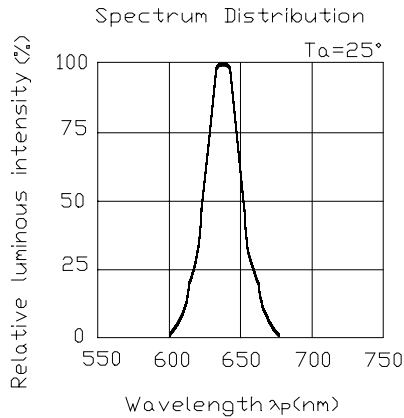



Technical Data Sheet

3.68*6.22mm Multi-Color Rectangular Legend LED Lamps

1006SYGSURW/S530-A3

■ Reliability test items and conditions:

The reliability of products shall be satisfied with items listed below.

Confidence level : 97%

LTPD : 3%

NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Failure Judgment Criteria	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	10 SEC	76 PCS	$I_v \leq I_{vt} * 0.5$ or $V_f \geq U$ or $V_f \leq L$	0/1
2	Temperature Cycle	H : +100°C 15min ∫ 5 min L : -40°C 15min	300 CYCLES	76 PCS		0/1
3	Thermal Shock	H : +100°C 5min ∫ 10 sec L : -10°C 5min	300 CYCLES	76 PCS		0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS		0/1
5	Low Temperature Storage	TEMP : -40°C	1000 HRS	76 PCS		0/1
6	DC Operating Life	TEMP : 25°C $I_F = 20\text{mA}$	1000 HRS	76 PCS		0/1
7	High Temperature / High Humidity	85°C / 85% RH	1000 HRS	76 PCS		0/1

Note : I_{vt} : To test I_v value of the chip before the reliability test

I_v : The test value of the chip that has completed the reliability test

U : Upper Specification Limit

L : Lower Specification Limit



Technical Data Sheet

3.68*6.22mm Multi-Color Rectangular Legend LED Lamps

1006SYGSURW/S530-A3

Packing Quantity Specification

1. 500PCS/1Bag , 5Bags/1Box

2. 10Boxes/1Carton

Label Form Specification

EVERLIGHT

CPN:

P/N:



1006SURSYGW/S530-A3

QTY:



CAT:

HUE:

REF:

LOT NO: EL



CPN: Customer's Production Number

P/N : Production Number

QTY: Packing Quantity

CAT: Ranks

HUE: Dominant Wavelength

REF: Reference

LOT No: Lot Number

Notes

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd,

Tucheng, Taichung 433, Taiwan, R.O.C.

Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

<http://www.everlight.com>