

■ Features

- ■Universal PCI 3.3 / 5.0V
- 2x RS232
- ****UART 16550 (16 Byte FIFO)**
- Speed 921 kbps
- ■PCI Plug and Play
- IRQ Interrupt sharing, only one Interrupt per card
- Drivers for Windows 95 to 7/2008 R2
- Software compatibel with DOS, Windows 3.11, OS/2, Linux and div. Unix

> Back to top

Zoom in Picture

VScom 200L UPCI

Quick Link: | Features | Overview | Hardware Specifications | Performance Features | Operating Systems | Ordering Information |

Overview

The L-series is an economic solution for standard applications. The serial ports are based on a 16C550A UART with 16 byte FIFO. The eightfold maximum speed allows some irregular transmission rates.

■ Hardware Specifications


Ports	2x RS232 (RxD, TxD, RTS, CTS, DTR, DSR, DCD, RI)
UART	2x 16550 (16 Byte FIFO)
Address	Plug and Play
Interrupts	PCI Plug and Play, only one interrupt/card
Speed	max. 921 kbps
Bus interface	Universal PCI 3.3V / 5.0V
Connectors	2x DB9 male (COM)
Size	L120mm x H89mm
Temperature	0°C - 55°C

■ Performance Features		
FIFO	FIFO size 16Byte adjustable Rx 1,4,8,14Bytes Tx 1 up to 16Bytes	
Handshake	RTS / CTS Xon / Xoff	
Speed	1bps up to 921kbps Multiplication factor for legacy applications	
UART	UART emulation of 8250 and 16450	
		> Back to top

■ Operating Systems

Windows 2000 up to 7 VScom high performance serial driver, x86 and x64 Editions	
Server 2000 to 2008 R2 VScom high performance serial driver, x86 and x64 Editions	
Windows NT 4.0 VScom high performance serial driver control panel applet	
Windows 95, 98, SE, ME VScom high performance serial driver	
virtuell address driver and compatibility tools real DOS Com port emulation	
OS/ 2 Supported by COM16 driver in recent system releases Third party serial driver SIO.SYS available	
Linux Kernel 2.6 and up: built-in support Previous kernel: VScom high performance real tty driver	
div.UNIX configuration instructions	
> Back to	<u>top</u>
■ Ordering Information	
Art.No 4462	
Product Name VScom 200L UPCI	
Packing list VScom 200L UPCI card CD and English documentation	
> Back to	top

■ Full size product image

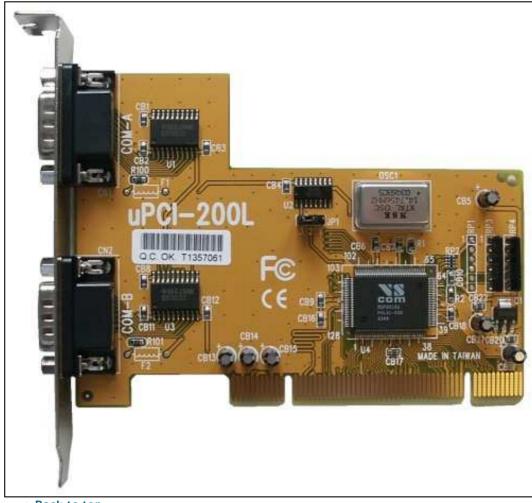

> Back to top