



[Zoom in Picture](#)

■ Features

- ARM9 166MHz
- 64MB SDRAM, 4MB Flash
- 1 x internal microSD Slot
- 1 x CF-Slot
- 2 x USB 2.0 Host
- 1 x CAN BUS
- 2 x Serial Ports RS232/422/485
- 2 x Serial Ports RS232
- 2 x Fast Ethernet Auto-MDI(X)
- 4 x Digital-I/O
- 2 x optical isolated input
- 2 x relay output
- 1 x I²C
- 1 x MiniPCI-Slot for WLAN 802.11b/g cards (optional)
- 1 x Console Port
- Very small, fanless, low Power
- Ready-to-run full-featured Debian GNU/Linux platform, Kernel 2.6.35
- FTP upload of applications
- RedBoot Boot-Partition
- DIN RAIL mountable
- Starter kits available

Alena

[Quick Link:](#) | [Features](#) | [Overview](#) | [Application](#) | [Appearance](#) | [System](#) | [Digital I / O x 8](#) | [Serial Interface](#) | [CAN BUS](#) | [LEDs](#) | [Power Requirements](#) | [Mechanical](#) | [Environmental](#) | [Approvals](#) | [Software Specifications](#) | [Software Development](#) | [Device Drivers](#) | [Ordering Information](#) |

■ Overview

The OnRISC Alena is an ARM9-based RISC industrial embedded computer. The great variety of interfaces like LAN, CF, USB, I²C, serial interface, CAN interface, digital I/O makes it easy to connect various industrial devices to the OnRISC. Because of CAN and RS485 options the Alena is good in monitoring field bus systems.

Compact dimensions and DIN Rail mounting capability make the OnRISC to a space saving and flexible mounting industrial computer. It is feasible to be installed even in space limited environments. The internal microSD slot protects the system software against accidentally removal. Due to RISC based architecture the OnRISC has very small power consumption, so fanless heat dissipation is possible. Working in a wide temperature range from -10°C up to 65°C the OnRISC can be applied in under harsh industrial conditions. Therefore the OnRISC is downright designed for industrial automation.

The embedded computer runs full-featured Debian GNU/Linux on ARM operating system Kernel 2.6. With Debian's repository database it is easy to install and update the free software on the OnRISC. The OnRISC is capable to act directly as software development host, WEB, Mail, Print and Database server or as a desktop computer with X11 window manager and many more.


Read the [News Article...](#)

■ Application

- Building automation system
- Automatic warehouse control system
- Self-service banking system (ATM)
- Wafer fabrication system
- Database server
- Small development host
- Remote and distributed serial devices control
- SCADA system
- Industrial / Factory / Laboratory automation
- WEB and Mail server
- Print server
- Small desktop with X11 windows manager and office software

■ Appearance

There are some appearance images of Alena



Klick on the thumbnails to enlarge them ...

[> Back to top](#)

■ System

Processor	ARM9 32-bit RISC CPU, 166MHz
Memory	64MB SDRAM
Flash	4MB BIOS
microSD-Reader	1 x internal as boot device, 7 MB/s SD 2.0 / SDHC
CF-Slot	Type II, True IDE mode (accepts MicroDrives) PIO-0 and PIO-3
LAN	2 x Fast Ethernet Auto-MDI(X)
USB	2 x USB 2.0 as Host
Expansion Slot	miniPCI (for WLAN)
Console Port	RS232, up to 115200bps
I²C	max. 330kHz
Time	Real time clock with battery backup (CR2032 in clip)
Other	Buzzer, Watchdog Timer

[> Back to top](#)

■ Digital I / O x 8

Input/ Output	4 Input/Output signals
Signal configuration	Signal direction individually configurable as Input or Output
Electrical	Input: TTL level (0.0 to 0.8V, 2.0 to 5.0V) Output Source: 32mA@TTL High (2.0 to 5.0V) Output Sink: 64mA@TTL Low (0.0 to 0.6V)
Input	2 optical isolated Input signals
Electrical	Opto-coupler with pull-up resistor
IRQ	Maskable IRQ for input signals
Output	2 Relay Output signals, dual function
Electrical	Contact Rating: 1A 30VDC / 0.5A 125VAC Switching Power: 30W (DC) / 62.5VA (AC)
Connector type	Terminal block

[> Back to top](#)

■ Serial Interface

Serial Port	2 x RS232/422/485, software selectable 1 x RS232 1 x RS232/CAN, software selectable Highspeed UART 16C950, 128 Byte FIFO
Available Modes	RS232 RS422 full duplex RS485 4-wire, full duplex RS485 2-wire, half duplex, with echo RS485 2-wire, half duplex, without echo
Signals RS232	TxD, RxD, RTS, CTS, DTR, DSR, DCD, RI, GND

Signals RS422	Tx+/-, Rx+/-, GND
Signals RS485	2-wire: Data+/-, GND 4-wire: Tx+/-, Rx+/-, GND
RS485 Data Direction Control	by ART (Automatic Receive Transmit control) by RTS
Speed	RS232: up to 500 kbps RS422/485: up to 3.6 Mbps

[> Back to top](#)

■ CAN BUS

Speed	CAN High Speed up to 1Mbit/s for transmit/receive
Signals	CAN_H, CAN_L, CAN_GND (shared with serial port 4)
Controller	SJA1000 (Philips)
Transceiver	TJA1050 (Philips)

[> Back to top](#)

■ LEDs

System	Power (red), WLAN (blue), IDE (yellow), User (green)
LAN	10M/Link, 100M/Link x 2 integrated in RJ45 connector
Serial	TxD, RxD for each port
CAN	CAN Activity (Data), CAN Error (shared with serial port 4)

[> Back to top](#)

■ Power Requirements

Power Input	9 - 30V DC input
Consumption	max. 1.5A @12V
Connector type	3-pin Power Terminal block

[> Back to top](#)

■ Mechanical

Dimensions	200×106×53 mm ³ (W×L×H) 210×112×53 mm ³ including DB9 connectors and Terminal block
Weight	0.38kg
Construction Material	Aluminium, 1mm
Mounting	DIN Rail, Wall mounting

[> Back to top](#)

■ Environmental

Operating Temp	-10°C - 65°C
Storage Temp	-20°C - 85°C

[> Back to top](#)

■ Approvals

EMC	FCC Class A, CE Class A
Environment	RoHS

[> Back to top](#)

■ Software Specifications

Linux	Debian GNU/Linux for ARM
Kernel	2.6 (Debian Lenny) Enhanced support for USB Watchdog Timer supported

proprietary BIOS to install and boot OS from CF, microSD, USB Mass

Bootloader	Storage Devices or over Network
File System	JFFS2 (on-board flash), ext2 (preinstalled system on CF) and many more choices
Protocol Stacks	ARP, PPP, CHAP, PAP, IPv4, ICMP, TCP, UDP, DHCP, FTP, SFTP, SNMP V1/V3, HTTP, HTTPS, NTP, NFS, SMB, SMTP, POP3, IMAP4, SSH 1.0/2.0, SSL, Telnet, PPPoE, OpenVPN, RFC2217
System Utilities	bash, telnet, ping, ftp, ssh, scp, netcat, socat, vim-tiny, e2progs, reiserfs, fdisk
Supporting Services and Daemons	telnetd: Telnet server daemon vsftpd: FTP server daemon sshd: Secure shell server daemon Apache2: Web server daemon Courier: Mail server daemon Samba: windows share daemon sredird: RFC2217 pppd: dial in/out over serial port daemon openssl: Open SSL openvpn: virtual private network
Complete Image	Pre-configured OS with applications to install on a 2 GB microSD or CF-card. It consists of tools gcc-3.3, vim-tiny services ssh, telnet, vsftpd (each as server and client) netcat and socat To speed up the boot process other software packages are not started automatically. To enable them please read the manual. Packages are: Samba client and server Apache2 web server Courier mail server NTP client and server sredird RFC2217 server WindowMaker desktop xdm server (X11) AbiWord dillo web browser

[> Back to top](#)

■ Software Development

On-board Tool Chain	Gcc, Glibc, gdb, vim-tiny editor, gmake (develop on Alena)
Linux Tool Chain	Gcc, Glibc, gdb, Insight, gmake (develop on a Linux PC)
Kernel	Kernel 2.6 sources
Hardware	Driver sources for Alena-specific hardware components
BuildRoot	<p>BuildRoot is a set of Makefiles and patches that allows to easily generate a cross-compilation toolchain, a root filesystem and a Linux kernel image for the target. Buildroot can be used for one or more of these options, independently. The benefits are:</p> <ul style="list-style-type: none"> • No need to supply the toolchain, will be built automatically • Choice between various file systems for the target image • Builds a very small and quick booting system that suits the needs • Drivers compiled as modules will be automatically installed on the file system image • many more ...

[> Back to top](#)

■ Device Drivers

USB (supports USB Mass Storage Devices, USB-to-Serial converters,

Data Communication

USB-CAN adapter, Bluetooth)
UART 16C950, 128 Byte FIFO, RS232/422/485
I²C
WLAN 802.11b/g RaLink cards (RT2561) optional

CAN

VScom CAN API, CANFestival, CANopen, LinCAN

Others

Digital I/O
RTC
Buzzer
LEDs
Watchdog Timer

[> Back to top](#)

■ Ordering Information**Art.No**

6805

Product Name

OnRISC Alena

Packing list

OnRISC Alena
Power supply adapter 12V, 1500mA
Adapter cable for console port
DVD-ROM-1: Debian on ARM
DVD-ROM-2: system images, sources, tools, English documentation

[> Back to top](#)


■ Full size product image



> [Back to top](#)

Alena Front View

[> Back](#)

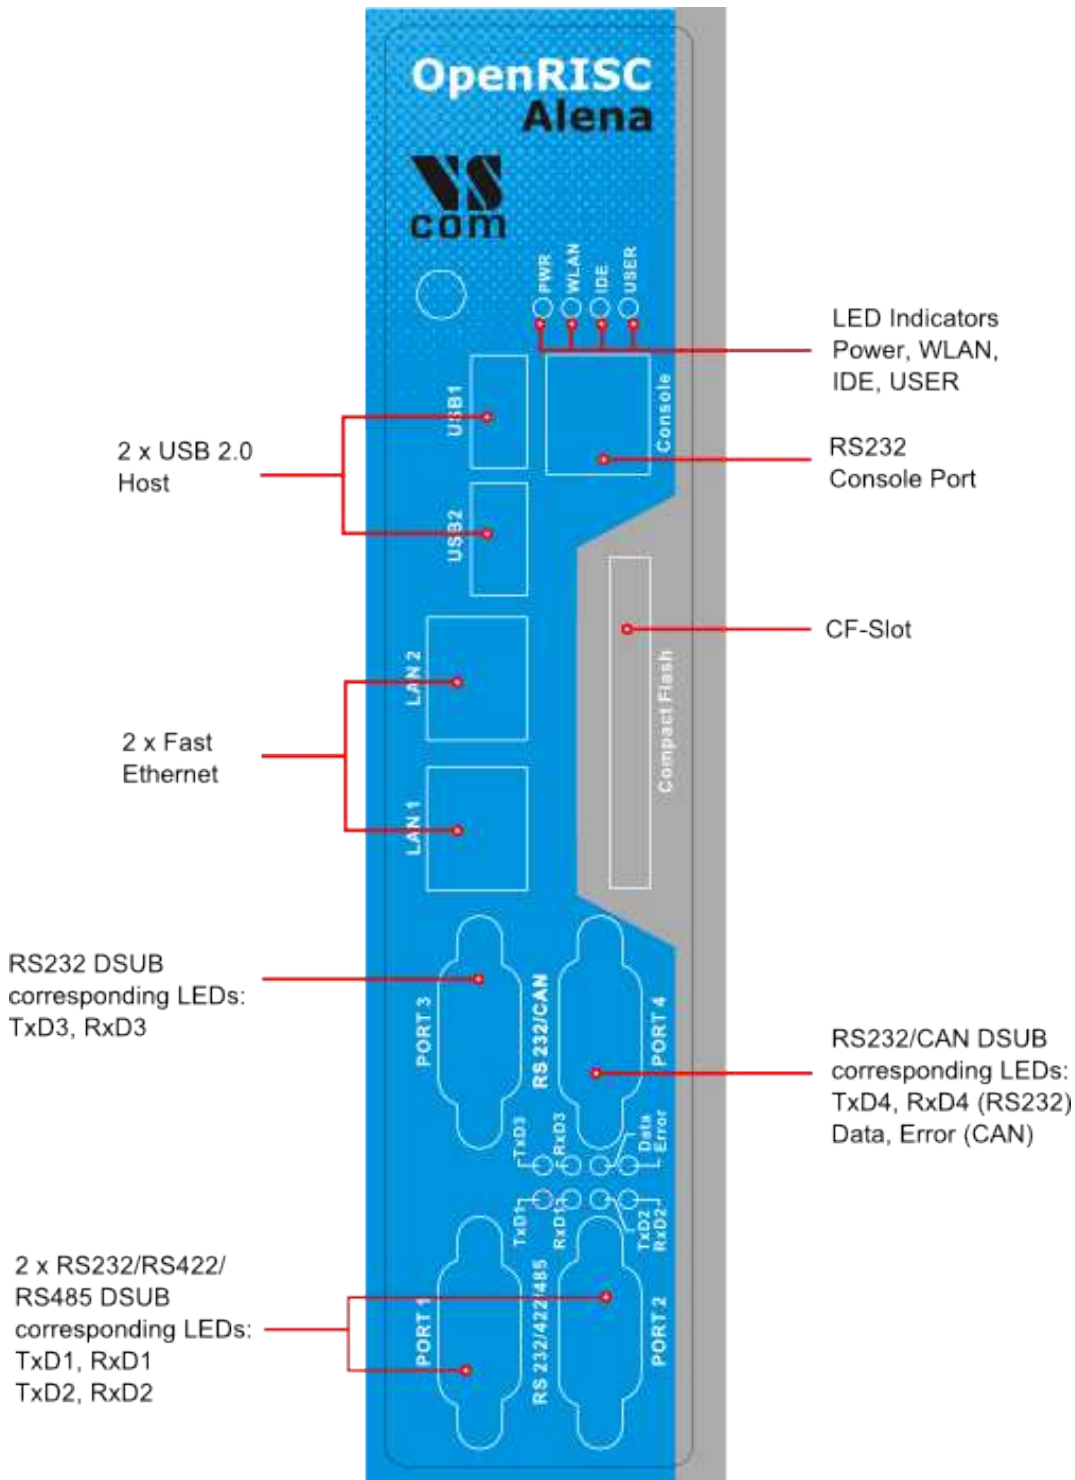

Alena Top View

[> Back](#)

