

# Medical Desk Top Power Supplies



[www.powersolve.co.uk](http://www.powersolve.co.uk)

## PSEM50 Series

### 26 to 50 Watts Switch Mode

### Universal AC Input

The PSEM50 series are a range of medically approved power supplies with output power up to 50 Watts. All supplies are UL94V-1 compliant and include an IEC320-C14 3 pin inlet connector. They are ideally suited for use in hospital instrumentation and many other applications where medical safety approvals are required. All models are approved to UL, cUL2601-1 and TUV (EN60601-1). EMC conforms to FCC Part-18 Class B and CISPR-11 EN55011 class B.



### Features

- Single, dual or triple output versions
- Optional output connectors
- 100% Burn-in
- Wide input voltage range 90 to 264 VAC
- Input surge current protection
- Overvoltage protection
- Overcurrent protection

### Electrical Specification

#### INPUT

Input voltage	90-264 VAC
Input frequency	47-63 Hz
Input current	1.3A 115 VAC, 0.7A (rms) 230 VAC
Earth leakage current	0.1mA Max

#### OUTPUT

Output voltage	See table
Output current	See table
Output power range	See table
Ripple & noise	2% max pk-pk
Overvoltage protection	112-132% nominal output
Overcurrent protection	110-150% nominal current
Temperature coefficient	All outputs $\pm 0.04\%$ / °C maximum
Transient response	4mS 50-100% load change

#### ENVIRONMENTAL

Operating temperature	0°C to +70°C, derate linearly from 100% at 40°C to 50% at 70°C
Storage temperature	-40°C to +85°C
Relative humidity	5% to 95%

#### GENERAL

Efficiency	75-88% depending on model
Hold-up time	16mS at 100VAC input and full load
Line regulation	$\pm 0.5\%$ typical, 1% max
Load regulation	3% typical, 5% max
EMC	Conform to EN550022'B', Fcc Part 15'B' and CISPR 22 class 'B'
Safety	UL/cUL2601-1, TUV (EN60601-1)

Powersolve Electronics Ltd. Units 8A, Arnhem Road, Newbury, RG14 5RU. England

Tel:01635 521858 Fax: 01635 523771 Email: [sales@powersolve.co.uk](mailto:sales@powersolve.co.uk)

# Medical Desk Top Power Supplies



[www.powersolve.co.uk](http://www.powersolve.co.uk)

## Output Voltage/Current Rating Chart - PSEM50 Series

MODEL	OUTPUT	TOTAL REGULATION	MAX POWER
PSEM50-05	5V 8A	5%	40 Watts
PSEM50-09	9V 5A	3%	45 Watts
PSEM50-12	12V 3.75A	3%	45 Watts
PSEM50-16	16V 2.81A	3%	45 Watts
PSEM50-24	24V 2.08A	2%	50 Watts
PSEM50-48	48V 1.04A	2%	50 Watts

Standard models fitted with a 1.2 metre output lead fitted with a 180 degree DIN plug.


**Options:** Alternative output connectors available, consult sales office with your requirements.  
Any output voltage available within the range of 2V to 50V DC.  
Some of these may be subject to minimum order quantities.

MODEL	OUTPUT 1				OUTPUT 2				OUTPUT 3				MAXIMUM OUTPUT POWER
	VNOM	IMIN	IMAX	TOL.	VNOM	IMIN	IMAX	TOL.	VNOM	IMIN	IMAX	TOL.	
PSEM50-3312	+3.3V	0.5A	5A	5%	+12V	0.2A	2A	5%	-	-	-	-	40W
PSEM50-512	+5V	0.5A	5A	5%	+12V	0.2A	2A	5%	-	-	-	-	42W
PSEM50-515	+5V	0.5A	5A	5%	+15V	0.2A	1.5A	6%	-	-	-	-	42W
PSEM50-524	+5V	0.5A	5A	5%	+24V	0.1A	1A	5%	-	-	-	-	42W
PSEM50-335	+3.3V	1.0A	5A	5%	+5V	0.4A	2A	5%	-	-	-	-	26.5W
PSEM50-1212	+12V	0.5A	3A	5%	-12V	0.2A	1A	5%	-	-	-	-	42W
PSEM50-1515	+15V	0.5A	2A	5%	-15V	0.2A	1A	5%	-	-	-	-	42W
PSEM50-524N	+5V	0.5A	5A	5%	-24V	0.1A	1A	5%	-	-	-	-	42W
PSEM50-57	+5.1V	0A	1A	5%	+7.2V	0.2A	2.6A	5%	-	-	-	-	23.8W
PSEM50-1010	+10.5V	0.2A	2A	5%	-10.5V	0.2A	2A	5%	-	-	-	-	42W
PSEM50-331212	+3.3V	0.5A	5A	5%	+12V	0.2A	2A	5%	-12V	0A	0.8A	5%	42W
PSEM50-5125	+5V	0.5A	5A	5%	+12V	0.2A	2A	5%	-5V	0A	0.8A	5%	42W
PSEM50-51212	+5V	0.5A	5A	5%	+12V	0.2A	2A	5%	-12V	0A	0.8A	5%	42W
PSEM50-51515	+5V	0.5A	5A	5%	+15V	0.2A	2A	6%	-15V	0A	0.8A	5%	42W
PSEM50-52424	+5V	0.5A	5A	5%	+24V	0.1A	1A	5%	-24V	0A	0.5A	5%	42W
PSEM50-52412	+5V	0.5A	5A	5%	+24V	0.1A	1A	5%	-12V	0A	0.8A	5%	42W
PSEM50-33125	+3.3V	0.5A	5A	5%	+12V	0.2A	2A	5%	-5V	0A	0.8A	5%	42W

Standard models fitted with a 1.2 metre output lead fitted with a 180 degree DIN plug.

**Options:** Alternative output connectors available, consult sales office for details.

## MECHANICAL DIMENSIONS mm

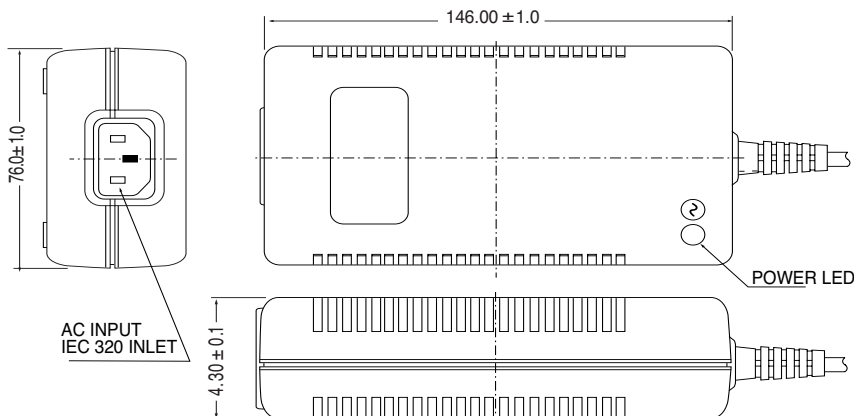

NOTE:

1. Dimensions shown in mm
2. Weight: 300-350gs approx.

Powersolve Electronics Ltd. Units 8A, Arnhem Road, Newbury, RG14 5RU. England

Tel:01635 521858 Fax: 01635 523771 Email: [sales@powersolve.co.uk](mailto:sales@powersolve.co.uk)