


Plug Top Power Adaptors



www.powersolve.co.uk

PPT30RE Series 30 Watt Switch Mode Universal AC Input

The PPT30RE series of CEC level IV compliant AC-DC Power Adaptors offer user interchangeable AC input plugs to enable operation in many different countries. Adaptors can be ordered with up to 4 different interchangeable plugs to meet the power socket requirements of most countries.

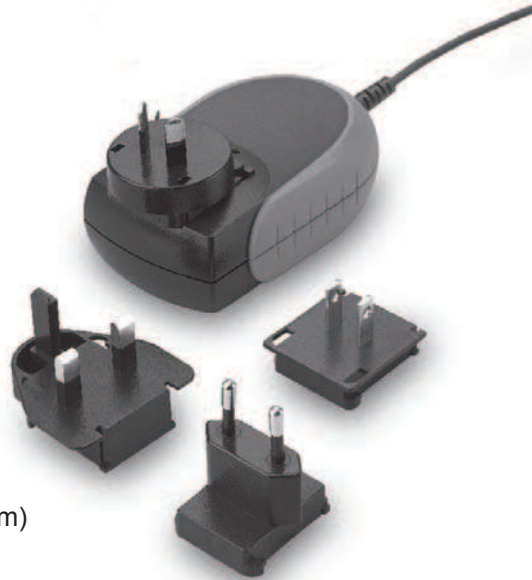

Features

- Universal Input Range 90-264VAC
- Over Voltage & Continuous Short Circuit Protection
- Conductive EMI Meets CISPR/FCC Class B
- CEC Level IV Compliant (Output cable length $\leq 1800\text{mm}$)
(PPT30RE-090: Output cable length $\leq 1220\text{mm}$)
- Optional Output Connector

Electrical Specification

INPUT

Input Voltage Range	90 - 264Vac
Frequency	47 - 63Hz
Input Current	0.8A max.
Inrush Current	50A max. @ 240Vac
Isolation - Input/Output	4242VDC
Leakage Current	0.25mA max.

OUTPUT

Hold-up Time	10mS typ. @ 115Vac
Short Circuit Protection	Continuous (Auto Recovery)
Over Voltage Protection	Yes

ENVIRONMENTAL

Operating Temperature Range	0°C to +40°C
Storage Temperature Range	-20°C to +85°C
Cooling	Natural convection

GENERAL

Safety Approvals	cUL/UL 60950, TUV EN60950
Dimensions	108.67 x 61.98 x 36.70 mm 4.278 x 2.440 x 1.445 inches
Weight	300g

Output Voltage and Current Ratings

MODEL	OUTPUT VOLTAGE	OUTPUT CURRENT Min.	OUTPUT CURRENT Max.	RIPPLE & NOISE	VOLTAGE ACCURACY	LINE REG.	LOAD REG.	% EFF.
PPT30RE-090	9V	0A	3300mA	$\pm 1\%$	$\pm 2\%$	$\pm 1\%$	$\pm 3\%$	78%
PPT30RE-120	12V	0A	2500mA	$\pm 1\%$	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	79%
PPT30RE-150	15V	0A	2000mA	$\pm 1\%$	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	81%
PPT30RE-180	18V	0A	1650mA	$\pm 1\%$	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	81%
PPT30RE-240	24V	0A	1250mA	$\pm 1\%$	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	83%

NOTE:

1. Voltage set point at 60% full load.
2. Output noise and ripple measured with 10 μF electrolytic & 0.1 μF ceramic capacitors across output at 20MHz BW.
3. Line regulation is measured from 100Vac to 240Vac at full load.
3. Load regulation is measured from 60% to full load and from 60% to 20% load (60% $\pm 40\%$ load).

Typical at 25°C, nominal line and 75% load unless otherwise stated.



Plug Top Power Adaptors



www.powersolve.co.uk

Mechanical Details

All Dimensions in Inches(mm)
 Tolerance Inches: x.xxx= ±0.02
 Millimeters: x.xx= ±0.5

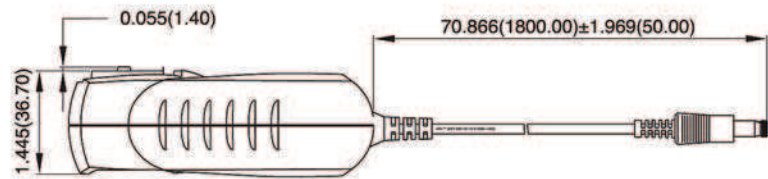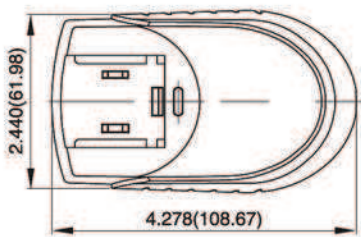

Options: Consult Sales Office for details
 Alternative output connectors available
 In-line ferrite core on output cable

