




- **Temperature Compensated Crystal Oscillator**
- **Miniature 3.2 x 2.5 mm Package**
- **Excellent Frequency Stability**
- **Low Phase Noise**
- **Complies with Directive 2002/95/EC (RoHS)** 

XTC7010

15.00000 MHz TCXO



4-Terminal SMD Case

Electrical Characteristics

Characteristic	Sym	Notes	Minimum	Typical	Maximum	Units
Nominal Frequency	f_o			15.00000		MHz
Frequency Tolerance after Reflow			± 2 ppm maximum @ 25 ± 2 $^{\circ}\text{C}$			
Storage Temperature Range in Tape and Reel			-40		+85	$^{\circ}\text{C}$
Operating Temperature Range			-40		+85	$^{\circ}\text{C}$
Power Supply Voltage	V_{DD}		2.66	2.80	2.94	V
Out Voltage with 10 pF 10 K Ω Load			0.5			V_{P-P}
Output Waveform			Clipped Sinewave			
Power Supply Current	I_{DD}				2.0	mA
Frequency Stability versus:						
Temperature, -40 to 85 $^{\circ}\text{C}$					± 2.5	ppm
Load Variation, 10 pF 10 K Ω $\pm 10\%$					± 0.2	ppm
Supply Voltage, 2.80 V $\pm 5\%$					± 0.2	ppm
Start Up Time, 90% of Final RF level in V_{P-P}					2.0	ms
Harmonics					-5.0	dBc
SSB Phase Noise @ 1 kHz Carrier Offset					-130	dBc/Hz
Aging @ 25 $^{\circ}\text{C}$					± 1.0	ppm/yr
Standard Shipping Quantity on 180 mm (7") Reel				1000		units
Lid Symbolization (in addition to Lot and/or Date Codes)	Line 1: 7010 Line 2: YWWS					

Pin Connections

Connection	Terminals
Ground	1
Ground	2
TCXO Output	3
V_{DD}	4





CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.

Notes:

1. The design, manufacturing process, and specifications of this device are subject to change without notice.

4-Terminal Surface-Mount Seam Weld Case

3.2 x 2.5 mm Nominal Footprint

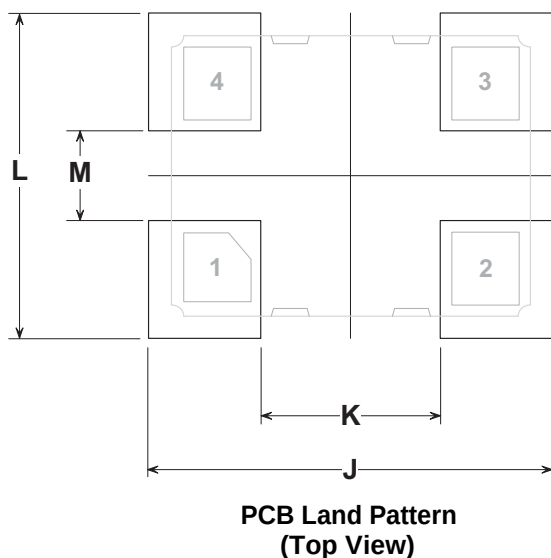
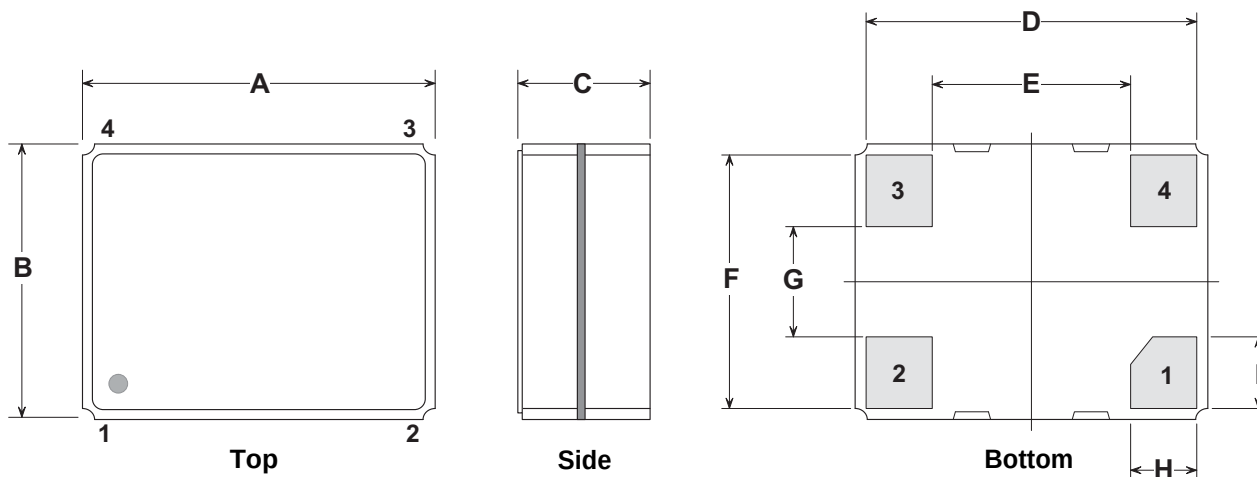


Case and PCB Land Dimensions


Dimension	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
A	3.00	3.20	3.40	0.118	0.126	0.134
B	2.30	2.50	2.70	0.091	0.098	0.106
C	-	-	1.20	-	-	0.047
D	-	3.08	-	-	0.121	-
E	-	1.80	-	-	0.071	-
F	-	2.38	-	-	0.094	-
G	-	1.00	-	-	0.039	-
H	-	0.60	-	-	0.024	-
I	-	0.65	-	-	0.026	-
J	-	3.60	-	-	0.142	-
K	-	1.60	-	-	0.063	-
L	-	2.90	-	-	0.114	-
M	-	0.80	-	-	0.031	-

Case Materials

Materials	
Solder Pad Plating	0.3 to 1.0 μ m Gold over 1.27 to 8.89 μ m Nickel
Lid Plating	2.0 to 3.0 μ m Nickel
Body	Al ₂ O ₃ Ceramic
Pb Free	

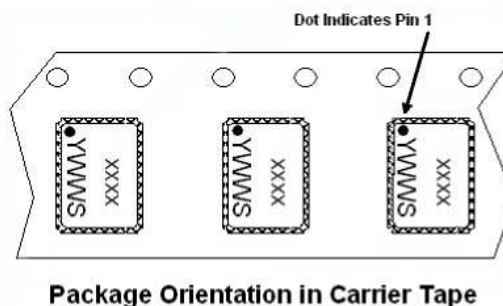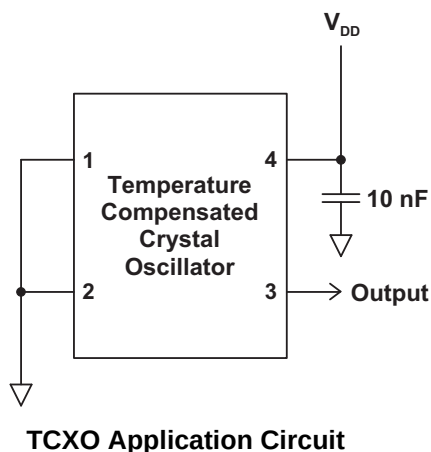


Reel Dimensions

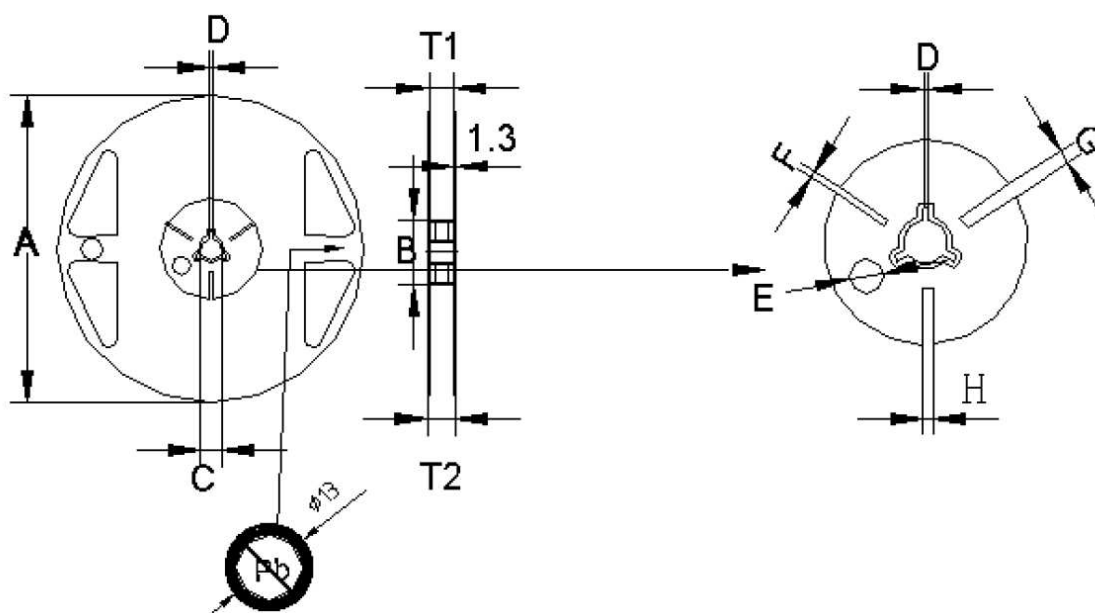

mm	A	B	C	D	E	F	G	H	T1	T2	T3
Dimension	180	60	13.0	2.0	9.1	2.9	4.9	3.9	9.0	11.4	1.2
Tolerance	±1.0	+1.0/-0.0	±0.2	±0.5	±0.5	±0.5	±0.5	±0.5	±0.3	±1.0	±0.1

Tape Dimensions

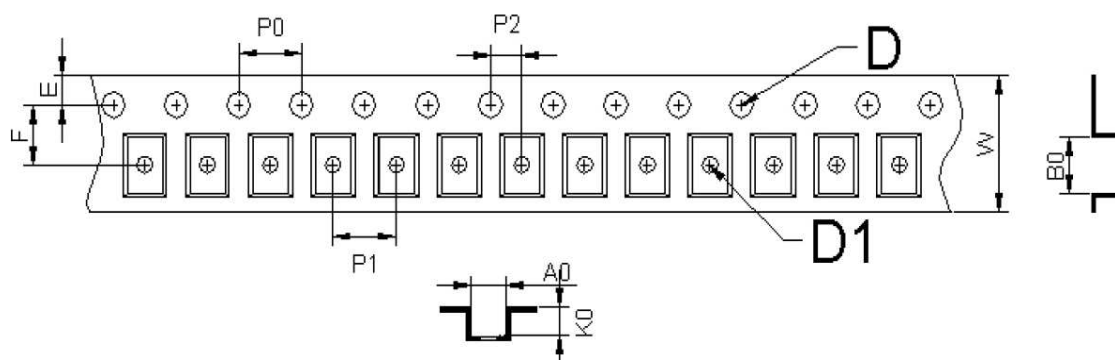

mm	A0	B0	W	F	E	P0	P1	P2	D1	D	K0	t
Dimension	2.80	3.71	8.00	3.50	1.75	4.00	4.00	2.00	1.50	1.00	1.75	0.25
Tolerance	±0.10	±0.10	+0.30/-0.10	±0.05	±0.10	±0.10	±0.10	±0.05	+0.10/-0.00	+0.25/-0.00	±0.10	±0.02