




- Quartz Temperature Stability
- Small Size
- Hermetic 11.5x4.0mm Surface-Mount Case
- Complies with Directive 2002/95/EC (RoHS)



SF2062A

229.25 MHz SAW Filter



SM1154-14

Absolute Maximum Ratings

Rating	Value	Units
Maximum Incident Power in Passband	+10	dBm
Max. DC voltage between any 2 terminals	30	VDC
Storage Temperature Range	-40 to +85	°C
Suitable for lead-free soldering - Max. Soldering Profile	260 °C for 30 s	


Electrical Characteristics




Characteristic	Sym	Notes	Min	Typ	Max	Units
Nominal Center Frequency	f_C	1	229.25			MHz
Passband	Insertion Loss at f_C	IL			8.35	dB
	3 dB Passband	BW_3	± 150			kHz
	$F_C \pm 100$ kHz Ripple			0.9		dB
	I/O Impedance			50		Ohm
	Group Delay Deviation across $F_C \pm 100$ kHz (-20 to +60 °C)	GDD		150		nsec
Attenuation	$f_C \pm 600$ kHz		20			dB
	$f_C \pm 900$ kHz		34			
	$f_C \pm 1.2$ MHz		32			
	10 MHz to 2 GHz		20			
Operating Temperature Range	T_A	1	-20		+80	°C


Matching to Unbalanced 50 Ω	External L-C	
Case Style	6	SM1154-14 11.5 x 4.0 mm Nominal Footprint
Lid Symbolization (YY=year, WW=week S=shift, ##=sequence code)		RFM SF2062A YYWWS##

Notes:


- Unless noted otherwise, all specifications apply over the operating temperature range with filter soldered to the specified demonstration board with impedance matching to 50 Ω and measured with 50 Ω network analyzer.
- Unless noted otherwise, all frequency specifications are referenced to the nominal center frequency, f_C .
- Rejection is measured as attenuation below the minimum IL point in the passband. Rejection in final user application is dependent on PCB layout and external impedance matching design. See Application Note No. 42 for details.
- The design, manufacturing process, and specifications of this filter are subject to change.
- US and international patents may apply.
- RFM, stylized RFM logo, and RF Monolithics, Inc. are registered trademarks of RF Monolithics, Inc.
- ©Copyright 1999, RF Monolithics Inc.
- Electrostatic Sensitive Device. Observe precautions for handling.

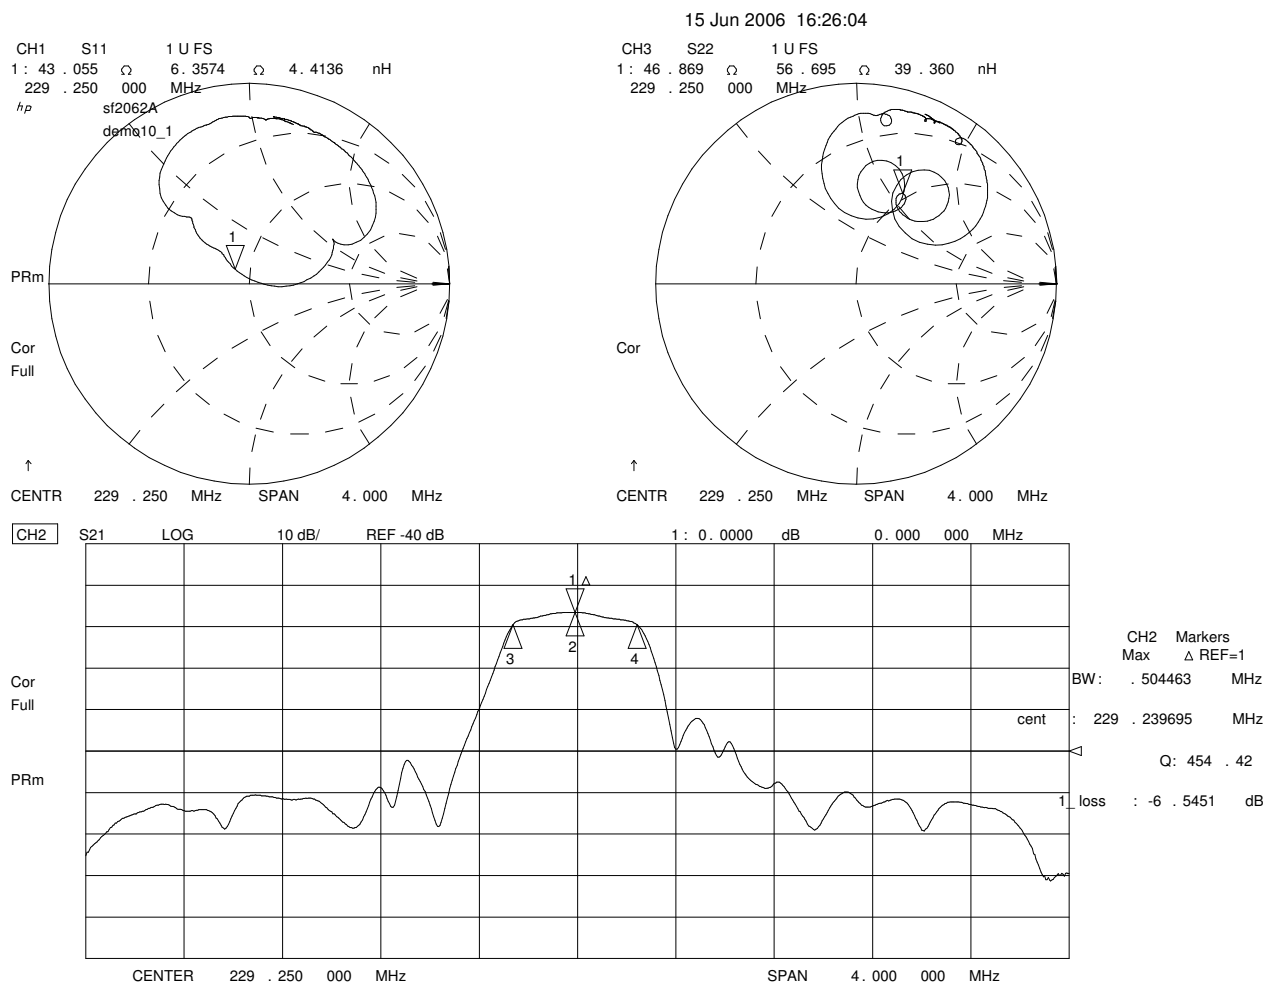

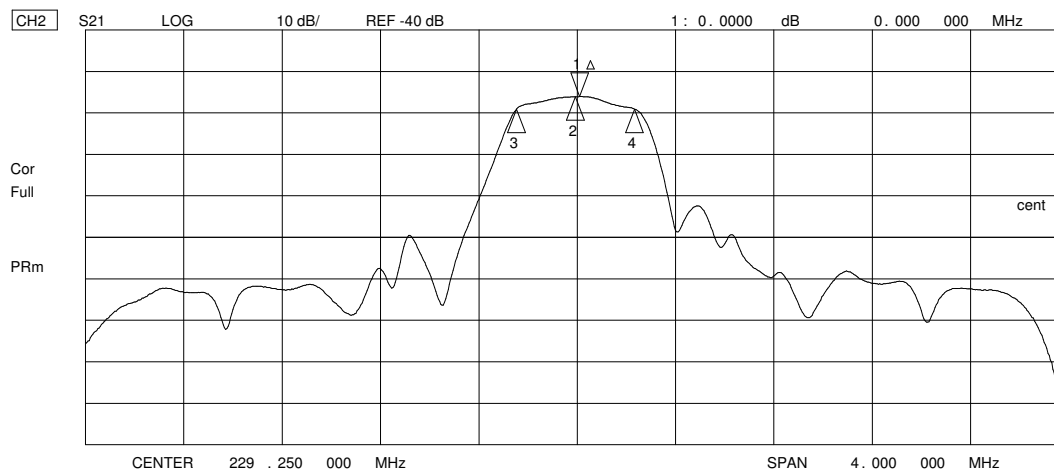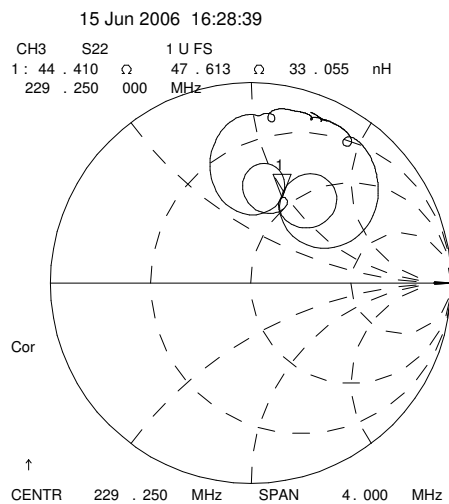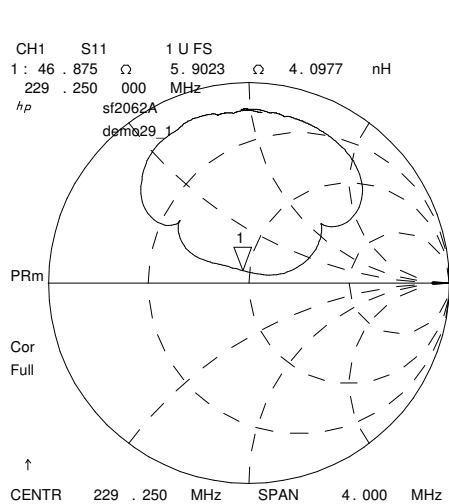

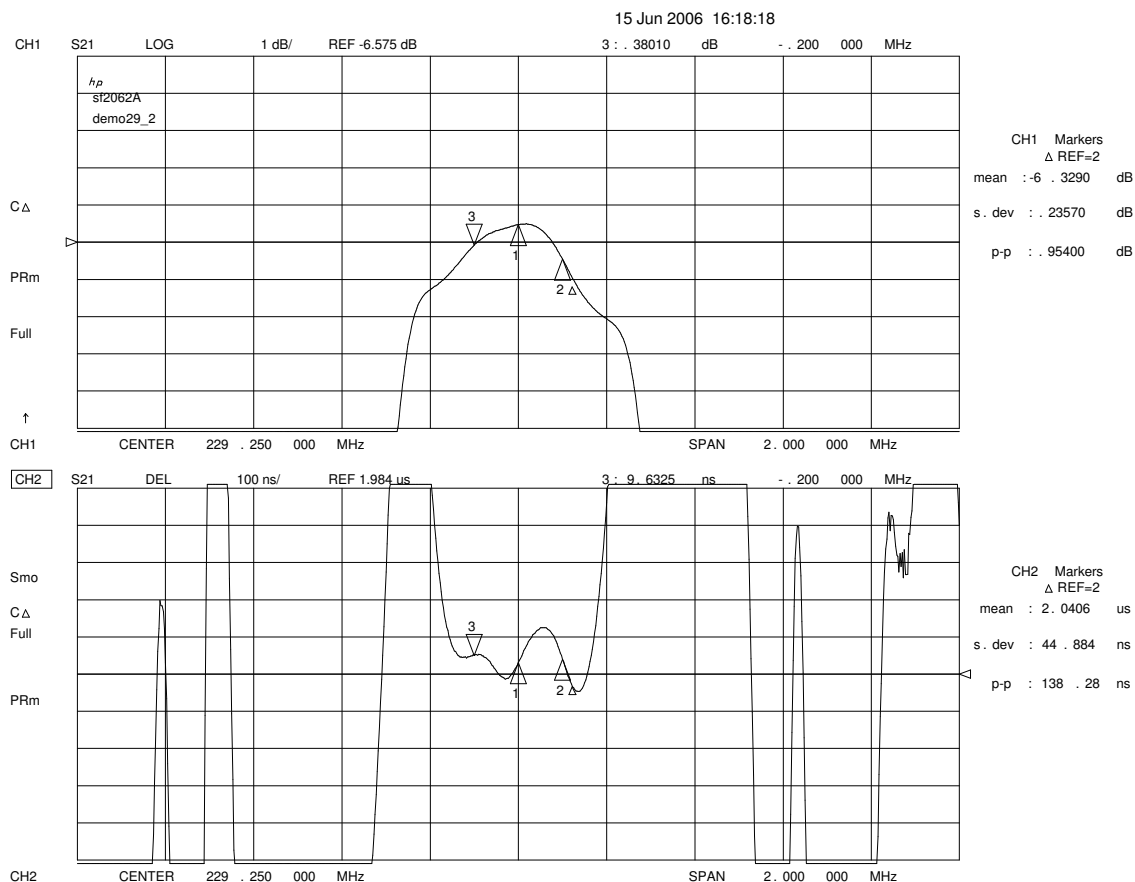

SF2062A Demo Board Rev 2

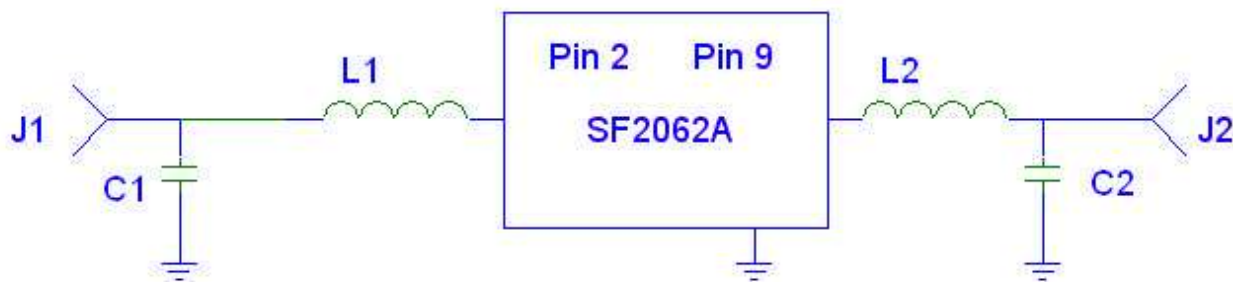

All other pins ground

PCB=400-1650-001 PCB

J1, J2=500-0248-002 2 hole flange SMA

C1=15 pF 500-0003-150 C2=10 pF 500-0003-100


L1=68 nH 0805CS

L2=82 nH 0805CS

Shield=Brass shim stock

SM1154-14 Case


14-Terminal Ceramic Surface-Mount Case
11.5 x 4.0 mm Nominal Footprint





Case Dimensions						
Dimension	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
A	11.4	11.5	11.6	.442	0.450	0.458
B	3.8	4.0	4.2	.150	0.157	.166
C	1.4	1.6	1.8	.057	0.063	.069
D	1.3	1.5	1.7	.053	0.059	.065
E		0.76			0.030	
F		1.27			0.050	
G		1.27			0.050	
H		0.1			0.004	

Materials	
Solder Pad Termination	Au plating 30 - 60 μ inches (76.2-152 μ m) over 80-200 μ inches (203-508 μ m) Ni.
Lid	Fe-Ni-Co Alloy Electroless Nickel Plate (8-11% Phosphorus) 100-200 μ inches Thick
Body	Al ₂ O ₃ Ceramic
Pb Free	

Electrical Connections	
Connection	Terminals
Input	2
Output	9
Ground	All Others

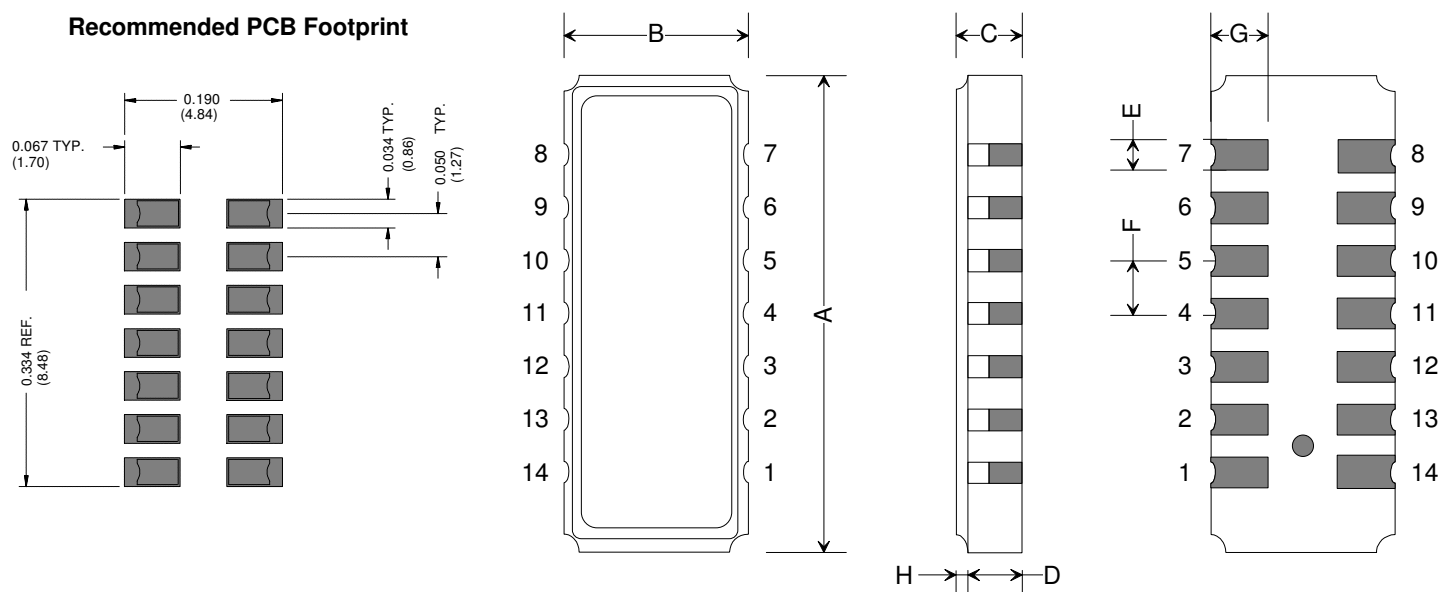
Recommended PCB Footprint

COMPONENT ORIENTATION and DIMENSIONS

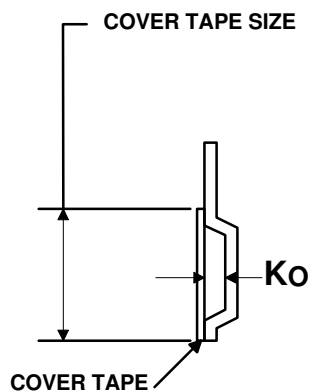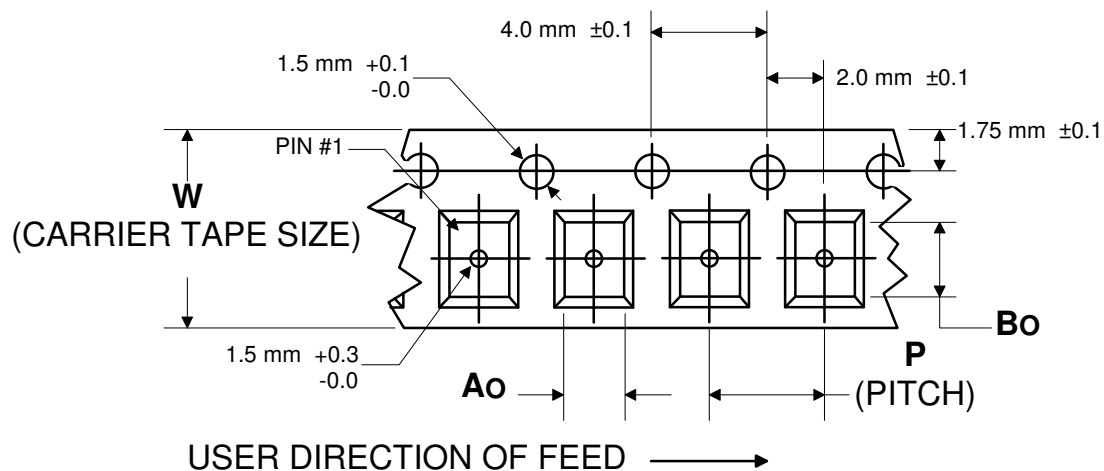

Carrier Tape Dimensions		
Ao	4.55 mm	± 0.1
Bo	12.04 mm	± 0.1
Ko	2.13 mm	± 0.1
Pitch	8.00 mm	± 0.1
W	24.00 mm	± 0.3


Leader and Trailer specifications (Based upon EIA-481)

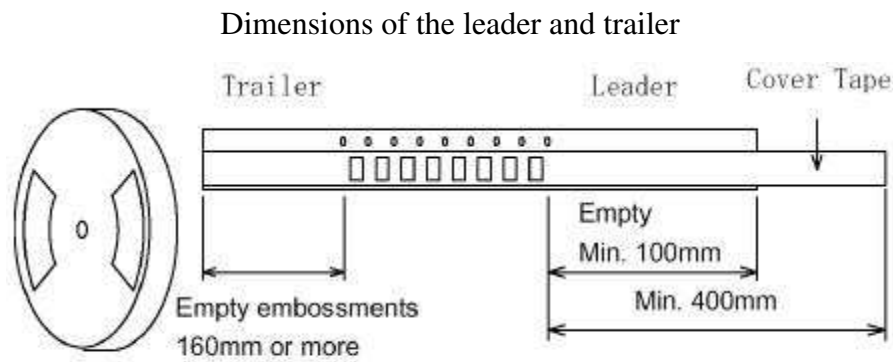

7 Inch Reel Quantity 500							
Symbol	A	N	C	D	B	W ₁	W ₂
Dimension	178 ⁺⁰ ₋₄	60 _{±1}	13 ^{+0.5} _{-0.2}	20.2 ^{+1.5} ₋₀	2 _{±0.5}	24.4 ⁺² ₋₀	30.4 MAX

13 Inch Reel Quantity 2000														
Symbol	A		N	C		D	B	W ₁	W ₂					
Dimension	330	⁺⁰ ₋₄	100	±2	13	^{+0.5} _{-0.2}	20.2	^{+1.5} ₋₀	2	±0.5	24.4	⁺² ₋₀	30.4	MAX

Dimensional drawing of the reel

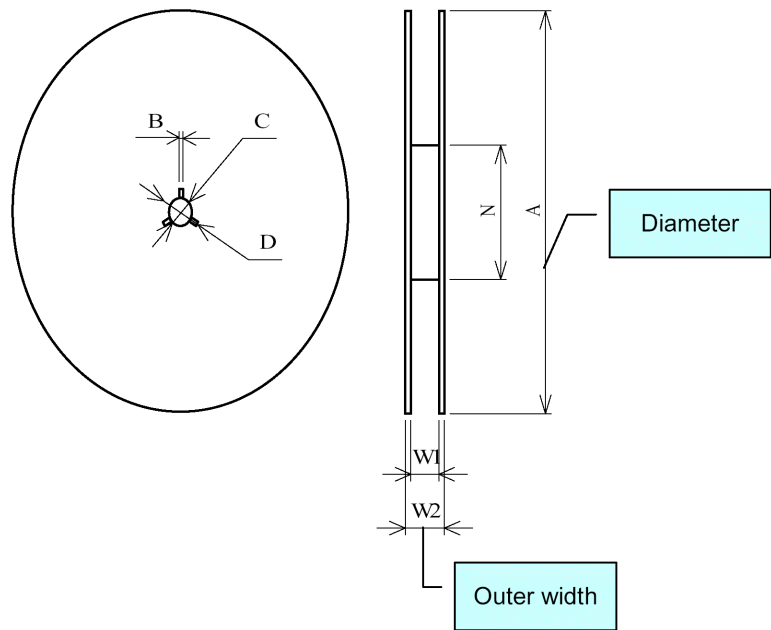


Additional items**(1) Cover tape peeling strength**

The cover tape shall be adhered evenly to the carrier tape along both sides in the pulling direction.

The cover tape peeling strength shall be as follows for an angle between the cover tape and the pulling direction of 165° to 180° (see the figure) and a peeling speed of 300mm/min. ± 10 mm/min.

[EIA-481] 0.1N to 1.3N for a tape width of 12 to 56mm

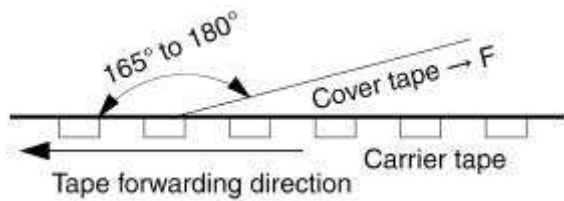**Fixing method**

1. Insert the tip of the carrier tape into the groove.
2. Fix the tip of the cover tape with adhesive tape.

Tape material

- (1) Carrier tape [anti-charging treatment: carbon used] Surface resistivity: 1×10^8 or less

Material: Polystyrene or Polycarbonate

- (2) Cover tape material: Polyester (anti-charging treated) Surface resistivity: 1×10^{12} or less
 $t = 50$ to $100\mu\text{m}$

Warranty periods

Cover tape peeling strength and mounting performance of stored components.

2-1. Cover tape peeling strength: One year after delivery (Peeling strength: 0.1N to 1.3N)

Number of missing components

There shall not be two or more consecutive missing components. Also, the maximum number of missing components shall be the larger of one piece or 0.1%.

Storage environment

Keep the product on which taping has been performed to a temperature below 40°C and a humidity within 80% RH. Do not subject in the direct sun.

Reel labels shall follow the format shown below. The long side of the label must measure between 2.75 and 4.0 inches (68 to 100 mm). The short side of the label must measure between 1.5 and 2 inches (38 to 80 mm). Bar codes must conform to AIAG standard B10.


Information that is on the label:

- Device Type: RFM part number
- Code: RFM designated part ID or part date code
- Reel ID: Manufacturing reel identification
- Reel Qty: Quantity of parts on the reel
- Work Order: Manufacturing work order number
- Date: Date product was loaded on tape and reel.
- Company Identification: R. F. Monolithics, Inc.
- *Q. C.: Area for QA stamps, other information is required
- Country of assembly





Examples of acceptable reel labels

Location of label on reel is shown below. Reel labels must be placed entirely on plastic, without covering open sections of the reel. Design of reel must satisfy this requirement. Pin #1 must be located on the side opposite the reel label.

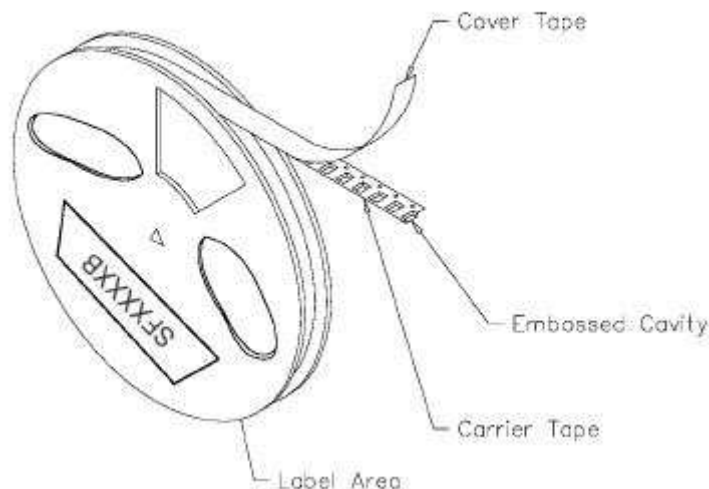


Package for Shipment

7 Inch Reel	Quantity Per Reel	Number Reels Per Carton	External Carton Dimensions	Reel Weight	Shipping Carton Weight	Total Weight
	500	4	254 x 254 x 127 mm 10 x 10 x 5 inches	896 g	448 g	1344 g
	500	10	254 x 254 x 203 mm 10 x 10 x 8 inches	2240 g	448 g	2688 g
13 Inch Reel	Quantity Per Reel	Number Reels Per Carton	External Carton Dimensions	Reel Weight	Shipping Carton Weight	Total Weight
	2000	2	356 x 356 x 102 mm 14 x 14 x 4 inches	1288 g	448 g	1736 g
	2000	4	356 x 356 x 178 mm 14 x 14 x 7 inches	2576 g	448 g	3024 g
	2000	8	356 x 356 x 356 mm 14 x 14 x 14 inches	5152 g	448 g	5600 g

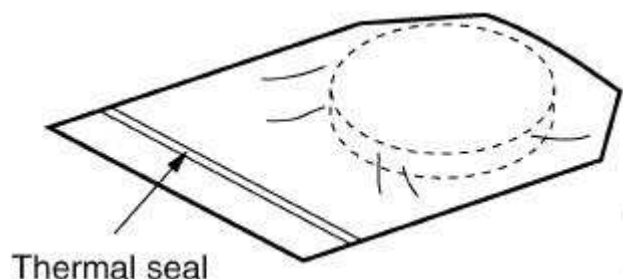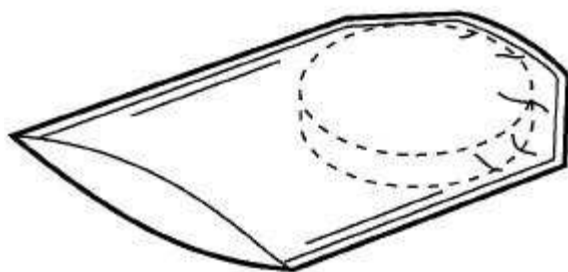

Thermal seal

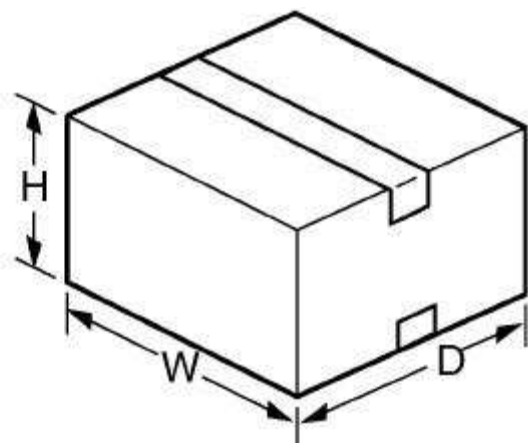

Shipment package

Sealing tape