

# Preliminary




- RF Filter Designed for Front End GLONASS Applications
- Excellent Rejection
- 1.45 x 1.15 mm Surface-mount Case
- Complies with Directive 2002/95/EC (RoHS)



**SF2216K**

**1603 MHz  
SAW Filter**



**SM1411-5 Case**

## Absolute Maximum Ratings

Rating	Value	Units
Maximum Incident Power in Passband	+10	dBm
Maximum DC Voltage On any Non-ground Terminal	3	VDC
Operating Temperature Range	-30 to +85	°C
Storage Temperature Range in Tape and Reel	-40 to +85	°C
Soldering Temperature Profile, 5 cycles/10 seconds maximum	265	°C

## Electrical Characteristics

Characteristic	Sym	Notes	Min	Typ	Max	Units
Center Frequency	$f_C$			1603		MHz
Insertion Loss, 1597 to 1609 MHz	$IL_{MAX}$			7.5	11.5	dB
Amplitude Ripple, 1597 to 1609 MHz				2.3	6.5	dB <sub>p-p</sub>
Group Delay Ripple, 1597 to 1609 MHz				15	50	ns <sub>p-p</sub>
Rejection Referenced to 0 dB:						dB
10 to 1000 MHz			28	34		
1000 to 1500 MHz			25	29		
1574 to 1577 MHz			20	31		
1625 to 1640 MHz			15	30		
1640 to 1660 MHz			25	30		
1710 to 2000 MHz			25	27		
VSWR, 1597 to 1609 MHz				1.8:1	2.3:1	
Terminating Source impedance	$Z_S$			50		$\Omega$
Terminating Load impedance	$Z_L$			50		$\Omega$
Case Style				SM1411-5		
Lid Symbolization $\square$ = year/month manufacturing code				A□		




**CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.**


### Notes:

1. US and international patents may apply.
2. RFM, stylized RFM logo, and RF Monolithics, Inc. are registered trademarks of RF Monolithics, Inc.


# Frequency Response Plots

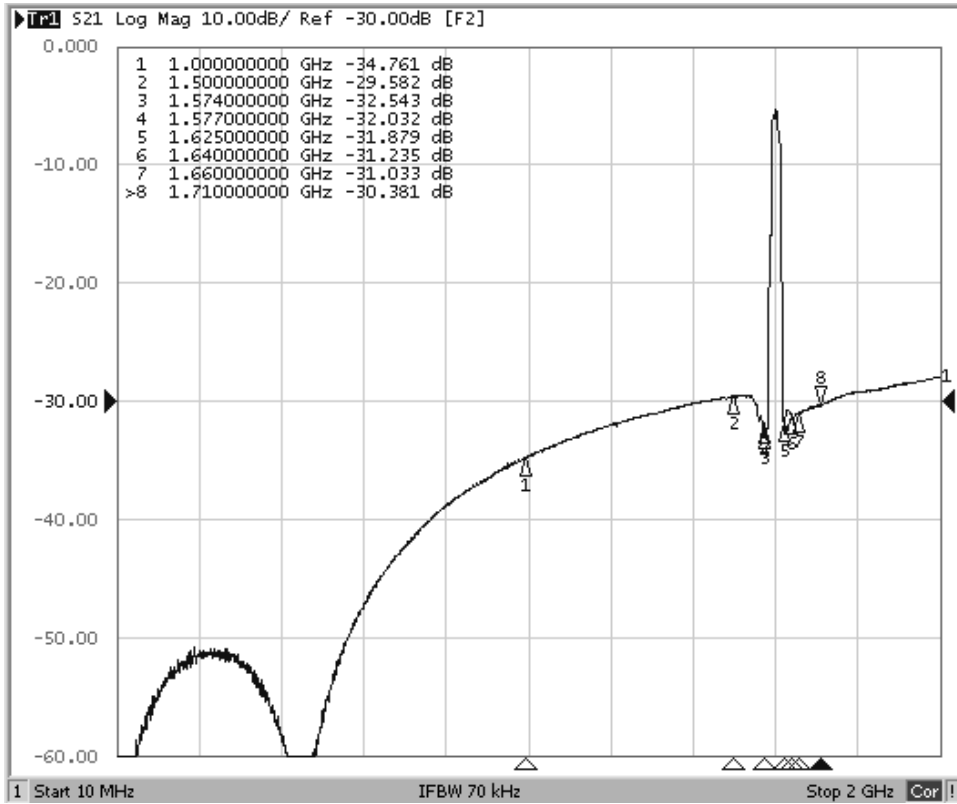


## Input VSWR Plot

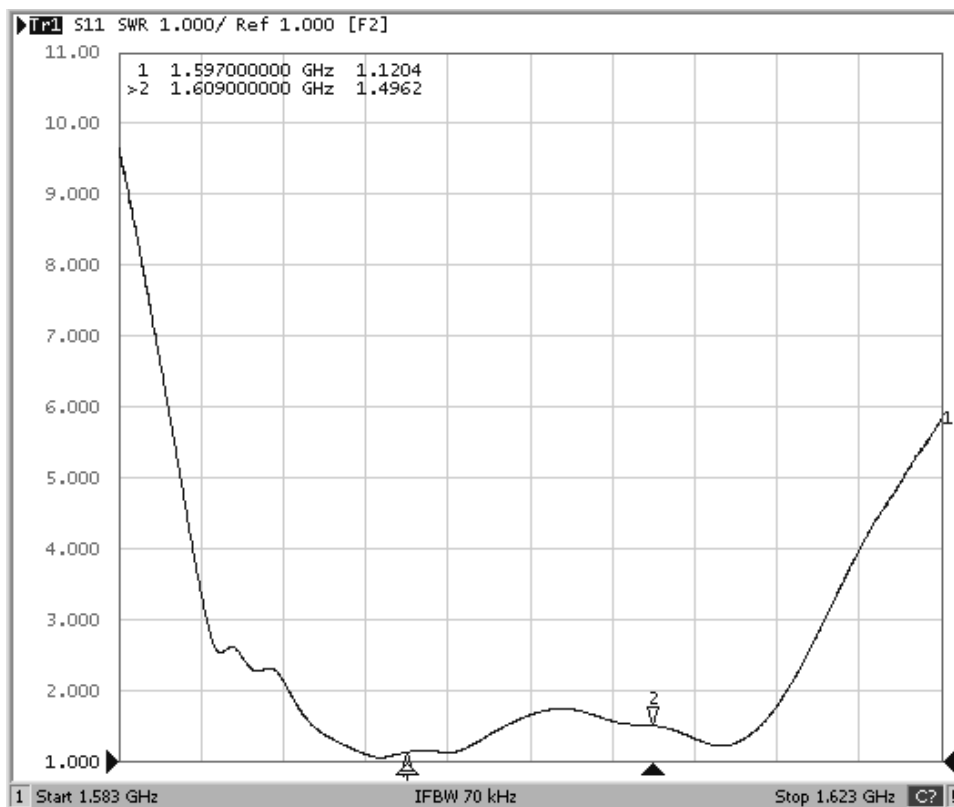



## Output VSWR Plot

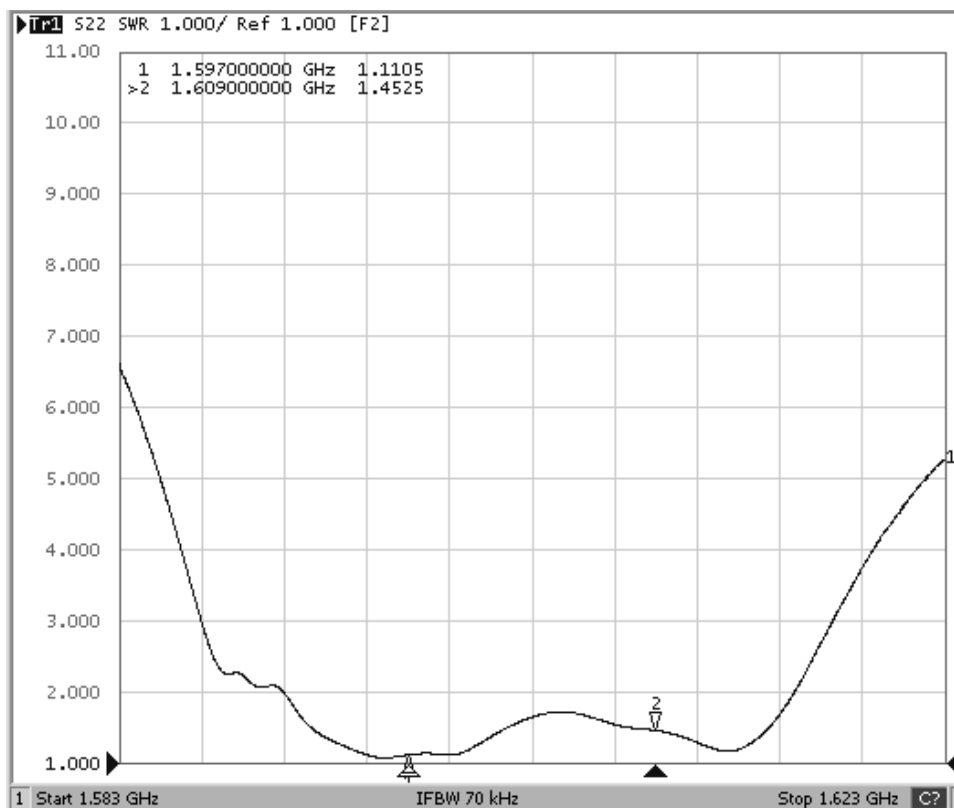

# Group Delay Plot

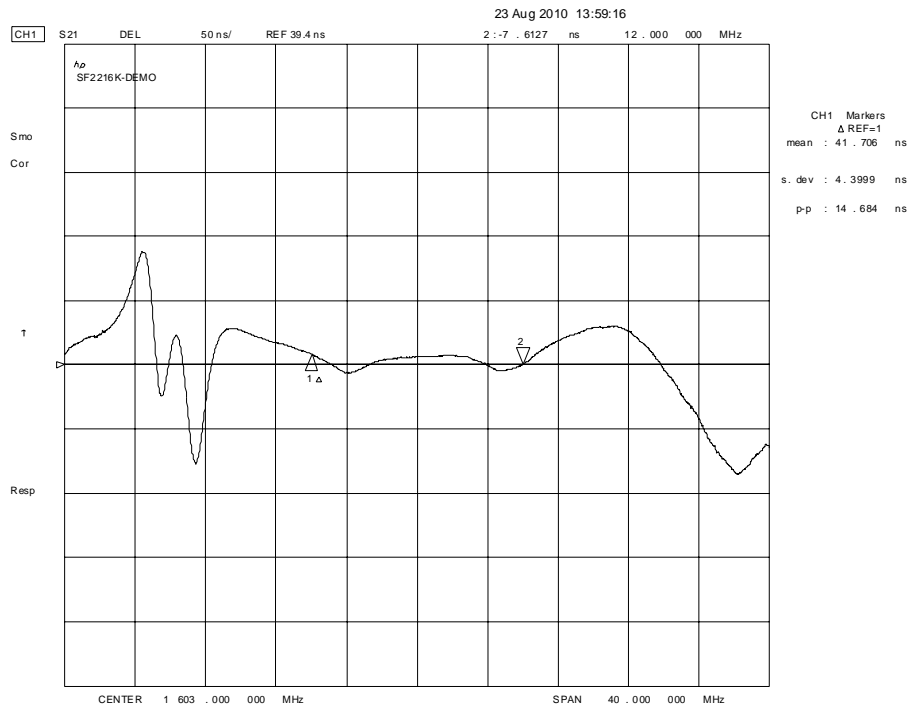

# SM1411-5 1.4 X 1.1 mm 5-Terminal Surface-mount Case Drawing

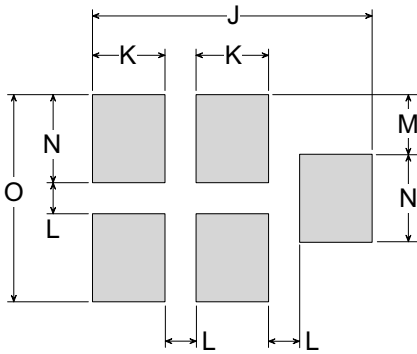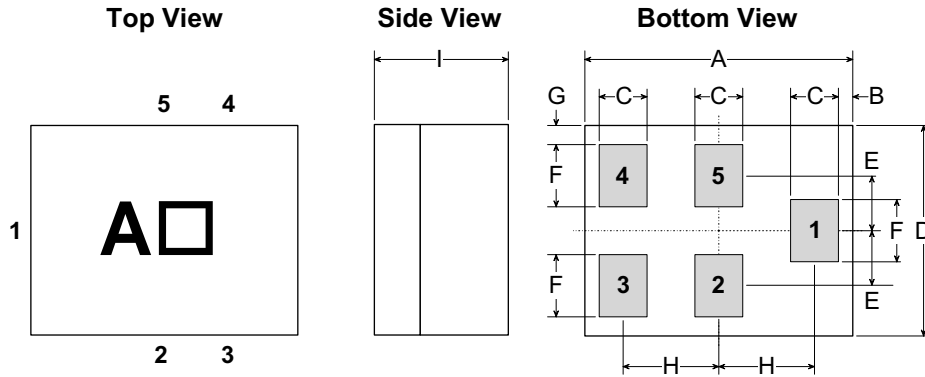


**PCB Footprint**

## Case and PCB Footprint Dimensions


Dimension	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
A	1.3500	1.4000	1.4500	0.0531	0.0551	0.0571
B	-	0.0750	-	-	0.0030	-
C	0.1700	0.250	0.3300	0.0067	0.0098	0.0130
D	1.0500	1.1000	1.1500	0.0413	0.0433	0.0453
E	-	0.2875	-	-	0.0113	-
F	0.2450	0.3250	0.4050	0.0096	0.0128	0.0159
G	-	0.100	-	-	0.0039	-
H	-	0.5000	-	-	0.0197	-
I	0.6000	0.6500	0.700	0.0236	0.0256	0.0276
J	-	1.3500	-	-	0.0531	-
K	-	0.3500	-	-	0.0138	-
L	-	0.1500	-	-	0.0059	-
M	-	0.2875	-	-	0.0113	-
N	-	0.4250	-	-	0.0167	-
O	-	1.0000	-	-	0.0394	-

Materials	
Solder Pad Plating	0.3 to 1.0 $\mu\text{m}$ Gold over 1.27 to 8.89 $\mu\text{m}$ Nickel
Lid Plating	2.0 to 3.0 $\mu\text{m}$ Nickel
Body	$\text{Al}_2\text{O}_3$ Ceramic
Pb Free	

## Test Circuit

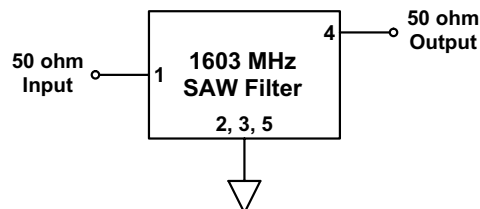

# Reel Dimensions - 7 inch Reel, 3000 Filters

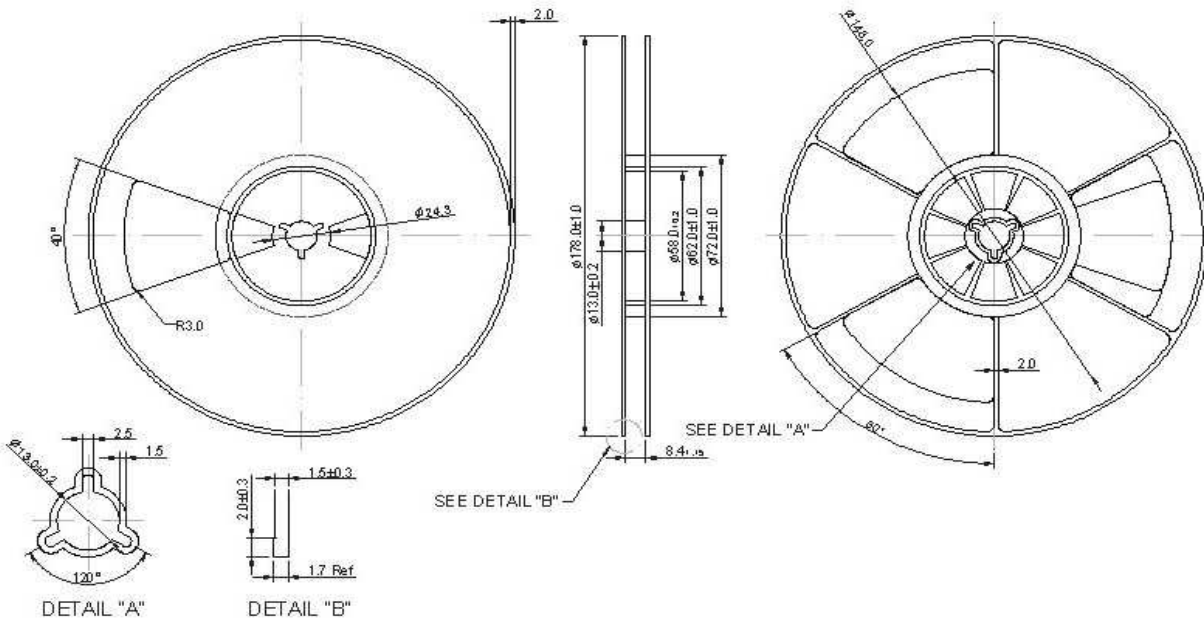

## Tape Dimensions

