

E | 5_2

5.1.1 Universal Carrying Handles	E 5_2
5.1.2 U-Handles Aluminium, Anodised	E 5_3
5.1.3 Die Cast Aluminium Handles	E 5_3
5.1.4 Small Component U-Handle, Steel	E 5_4

E | 5_5


5.2.1 Case Feet Type 15	E 5_5
5.2.2 Case Feet Type 14	E 5_5
5.2.3 Feet	E 5_6
5.2.4 Push in Feet	E 5_6
5.2.5 Rubber Case Feet	E 5_6
5.2.6 Bumpon (Self adhesive Feet)	E 5_6



5.1 Handles

5.1.1 Universal Carrying Handles

- For portable units up to 6 U
- Sturdy and light
- Easy assembly
- Carrying capacity up to 30 kg
- Lock in increments of 30°
- Operating temperature -20°C to +60°C
- Fixing material included
- **Scope of delivery:**
 - 2 side parts assembled
 - 2 raised cross recessed screws M4 x 16
 - 2 raised cross recessed screws M5 x 16
 - 2 press-in nuts M4
 - 4 caps
- Cross bar see 5.1.1.1

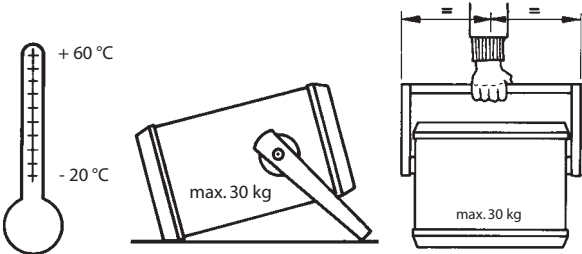


5.1.1 Universal Carrying Handles

Description	Material	Colour	Part-No.
Side arm assembled	Glass fiber reinforced plastic	Stone-grey	61-160-50
		Black (Ral 9005)	61-160-60

5.1.1.1 Cross Bars

- Aluminium, coated (softfeel)
- **Scope of delivery:**
 - 1 handle extrusion

Description	Front	Length L	Part-No.
Handle extrusion	M5 x 15	266.4	66-308-20
	M5 x 15	373.1	66-308-21
	M5 x 15	479.8	66-308-23
	Ø 4.2 mm	1000	66-308-40

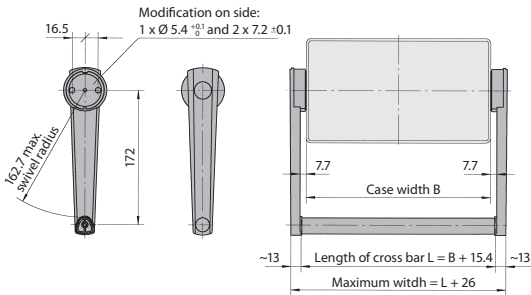


5: Handles / Feet

5.1.2 U-Handles Aluminium, Anodised



5.1.2 U-Handles Aluminium, Anodised

- Anodised aluminium extrusion
- Width: 9 mm
- **Scope of delivery:**
 - 1 aluminium handle
- Per handle 2 screws are needed, see below

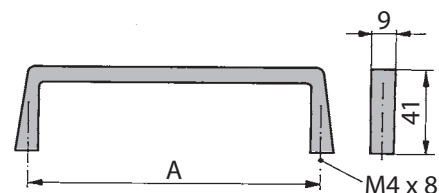

For Case Height	A		Colour	Part-No.
	mm	inch		
2 U	44.5	1.75	Clear anodised	60-527
			Black anodised	60-527-6
3 U	88.9	3.50	Clear anodised	60-528
			Black anodised	60-528-6
4 U	133.4	5.25	Clear anodised	60-529
			Black anodised	60-529-6
5 U	177.8	7.00	Clear anodised	60-530
			Black anodised	60-530-6
6 U	222.3	8.75	Clear anodised	60-531
			Black anodised	60-531-6

Assembly Material


Description	Part-No.	
	1 pc.	100 pcs.
Cross recessed cylinderhead earthing screw M4 x 10	61-260	1904-12
Torx cylinderhead earthing screw M4 x 10, size T20	5443-01	5443-01-2
Cross recessed countersunk screw M4 x 10	5342-10	1906-24
Torx countersunk screw M4 x 10, size T20	5470-26	5470-26-2

5.1.3 Die Cast Aluminium Handles



5.1.3 Die Cast Aluminium Handles

- Universal handle
- Wet painted white aluminium (RAL 9006)
- Material 1 U version: Die cast zinc
- **Scope of delivery:**
 - 1 die cast handle
- Per handle 2 screws are needed see below

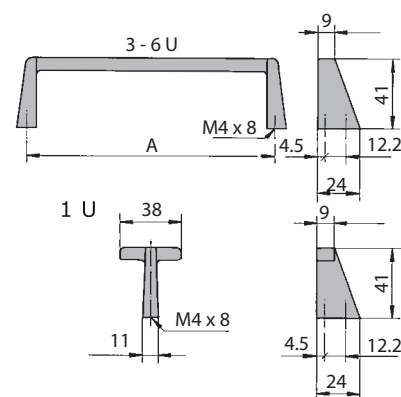

For Case Height	A		Part-No.
	mm	inch	
1 U	-	-	60-541
3 U	88.9	3.50	60-553
4 U	133.4	5.25	60-554
6 U	222.3	8.75	60-556


Assembly Material

Description	Part-No.	
	1 pc.	100 pcs.
Cross recessed cylinderhead earthing screw M4 x 10	61-260	1904-12
Torx cylinderhead earthing screw M4 x 10, size T20	5443-01	5443-01-2
Cross recessed countersunk screw M4 x 10	5342-10	1906-24
Torx countersunk screw M4 x 10, size T20	5470-26	5470-26-2

5.1.4 Small Component U-Handle, Steel



- 5.1.4 Small Component U-Handle, Steel**
- For small components
 - Steel powder coated black (RAL 9005)
 - **Scope of delivery:**
 - 1 handle
 - Per handle 2 screws are needed, see below




Description	Part-No.
U-handle steel, black	60-539

Assembly Material

Description	Part-No. 1 pc.
Cross recessed cylinderhead screw M2.5 x 6	5325-06
Torx cylinderhead screw M2.5 x 6	5470-04
Cross recessed countersunk screw M2.5 x 6	5322-06
Torx countersunk screw M2.5 x 6, size T8	5470-20

5: Handles / Feet

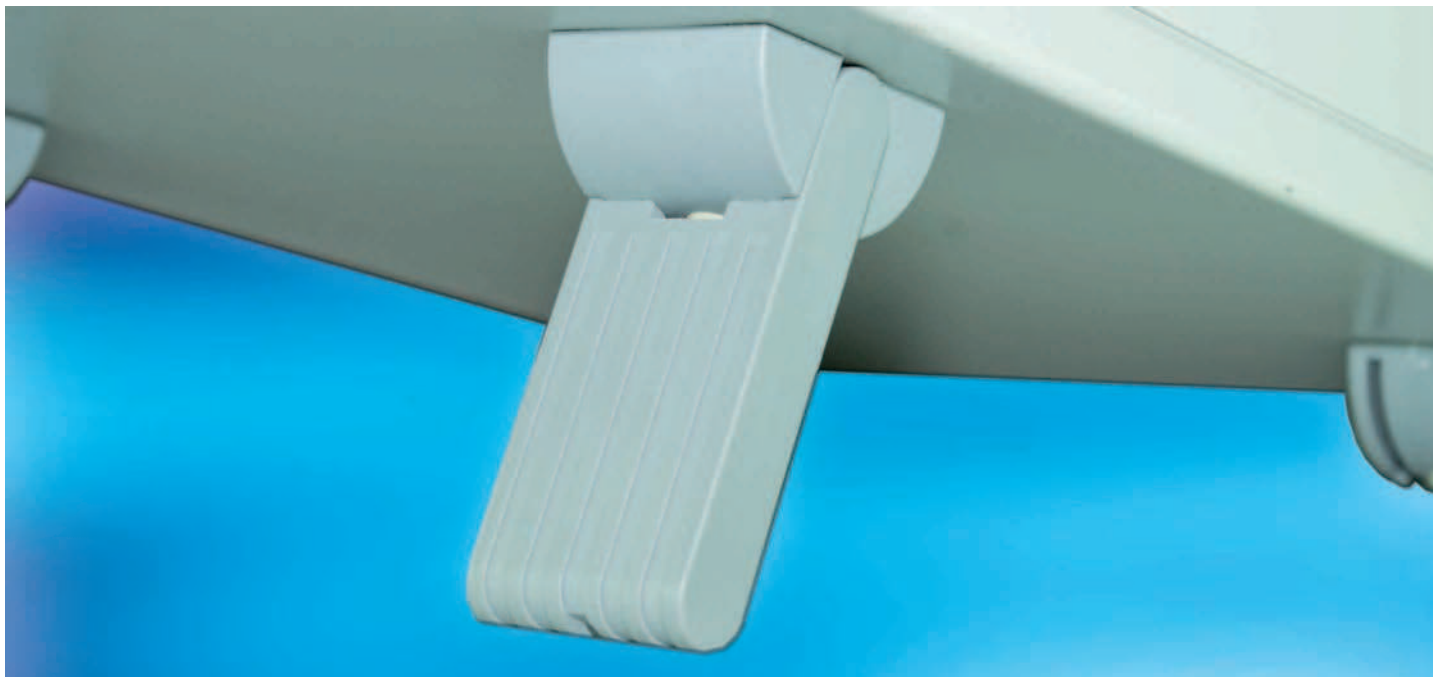


5.2 Feet

5.2.1 Case Feet Type 15



5.2.1 Case Feet Type 15

- With and without tilt feet
- Glass-fiber reinforced plastic, UL94 V-0
- Including screws 3.5 x 7
- Up to 30 kg carrying capacity per set
- **Scope of delivery:**
 - 2 + 2 case feet, incl. rubber inserts NBR
 - 8 cross recessed countersunk PT-screws 3.5 x 7




Discription	Colour	Part-No.
Case feet 2 x a + 2 x b	Light grey (RAL 7035)	63-524
Case feet 2 x a + 2 x b	Black (RAL 9005)	63-526
Case feet 2 x a + 2 x b	Dark grey (special)	63-525

5.2.2 Case Feet Type 14



5.2.2 Case Feet Type 14

- With or without tilt feet
- Glass-fiber reinforced plastic, UL94 V-0
- Including screws 3.5 x 7
- Up to 30 kg carrying capacity per set
- **Scope of delivery:**
 - 4 case feet
 - 8 cross recessed countersunk PT-screws 3.5 x 7
 - 4 rubber inserts NBR



Discription	Colour	Part-No.
Case feet 4 x b	Light grey (RAL 7035)	63-019
Case feet 4 x b	Black (RAL 9005)	63-321
Case feet 2 x a + 2 x b	Light grey (RAL 7035)	63-018
Case feet 2 x a + 2 x b	Black (RAL 9005)	63-320


5: Handles / Feet

5.2.3 Feet



5.2.3 Case Feet

- Including cross recessed self-tapping countersunk screws 2.9 x 9.5
- Up to 30 kg carrying capacity set

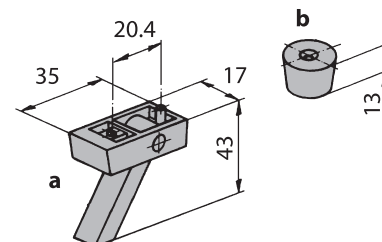


Material	Scope of delivery	Colour	Part-No.
Glass-fiber reinforced plastic	10 x a + 10 screws	Light grey (RAL 7035)	63-345
Neoprene	10 x b + 10 screws	Grey	63-346

5.2.4 Push in Feet



5.2.4 Push in Feet

- Plastic, UL94 V-0
- Easy and fast mounting without tools
- Drilling: $\varnothing 8 \pm 0.1$ mm
- Sheet metal: 1 to 2.5 mm
- **Scope of delivery:**
 - Set of 4 pieces plastic feet
 - Incl. push rivet




Description	Part-No.
Set of case feet light grey (RAL 7035)	63-529
Set of case feet black (RAL 9005)	63-528

5.2.5 Rubber Case Feet



5.2.5 Rubber Case Feet

- Including self-tapping screw 3.5 x 16
- Material: Neoprene 70 Shore A
- **Scope of delivery:**
 - 4 case feet
 - 4 cross recessed self-tapping countersunk screws 3.5 x 16




Material	Colour	Part-No.
Set of case feet	Stone-grey RAL 7030	63-441

5.2.6 Bumpon (Self adhesive Feet)



5.2.6 Bumpon (Self adhesive Feet)

- Self adhesive bumpon
- Black polyurethane, UL94 HB
- **Scope of delivery:**
 - Set of 4 pcs.



Description	Part-No.
Set of 4 plastic bumpon	7650-52-4

