

12R2 12U, Front Loaded




FEATURES

- Custom Card (9U), VME, VME64x, VXS, VPX, cPCI or MicroTCA compatible
- 19" rackmount per IEC60297 (slide mounting optional)
- 12U H, standard depths 22" and 25"
- 2-20 slot, IEEE 1101.10/.11 compliant card cages, front load
- Mounting for 4 x 5.25"HH devices
- Front to rear evacuative cooling (350 LFM @ .1" H20)
- Custom rear I/O patch panel (rear I/O cards optional)
- MIL grade components
- Front mounted LEDs for; voltage monitoring, fan fail and over temp
- 500-1200 watt PSU options
- Input options: 90-264VAC Fixed PSU, 47-500 Hz, 28/48VDC

PRODUCT INFORMATION


The 12U, 12R2 was designed to meet the harsh environment of shipboard, airborne, and ground mobile applications per MIL-STD's. The ability to mount 9U x 400mm or 6U x 160mm cards and a wide of array of device mounting options makes this unit an ideal platform for custom system design. Highly configurable, the unit can be order with choice of VME, VME64x, VXS, VPX, CPCI or MicroTCA, fixed or shock isolated card cage, rear I/O card mounting, device mounting, 500 to 1200 watt PSU, AC or DC input and custom I/O patch panel. Available in both 22" and 25" depths the unit holds up to 20, front loaded cards (fixed). Airflow is front to rear utilizing high volume fans. Shock isolated versions are designed to attenuate 25G shock inputs to the chassis to less than 10Gs at the card cage. All components, materials and design concepts are chosen to meet the applicable MIL-STD environments. The units come completely assembled and wired.

ORDERING INFORMATION

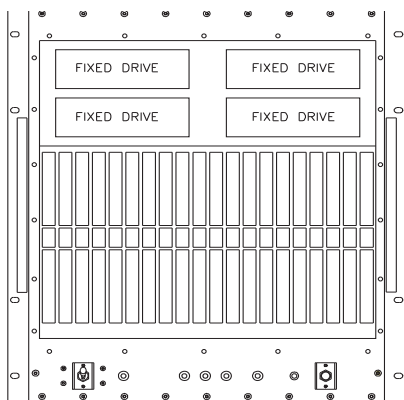

Description	Order Number
<ul style="list-style-type: none"> ■ 12U h x 25" d ■ Holds 20, 6U x 160mm cards, fixed mounted, front load ■ Holds 20, 6U x 80mm, rear I/O cards ■ 20 slot VME64x backplane w/P0 ■ Mounting for 4 x 5.25" HH devices ■ 1000 watt, 90-264VAC PSU, 47-500 Hz ■ 2 x 235cfm, HV fan 	12R2200P5FC8Y6VCF4

LINE DRAWINGS

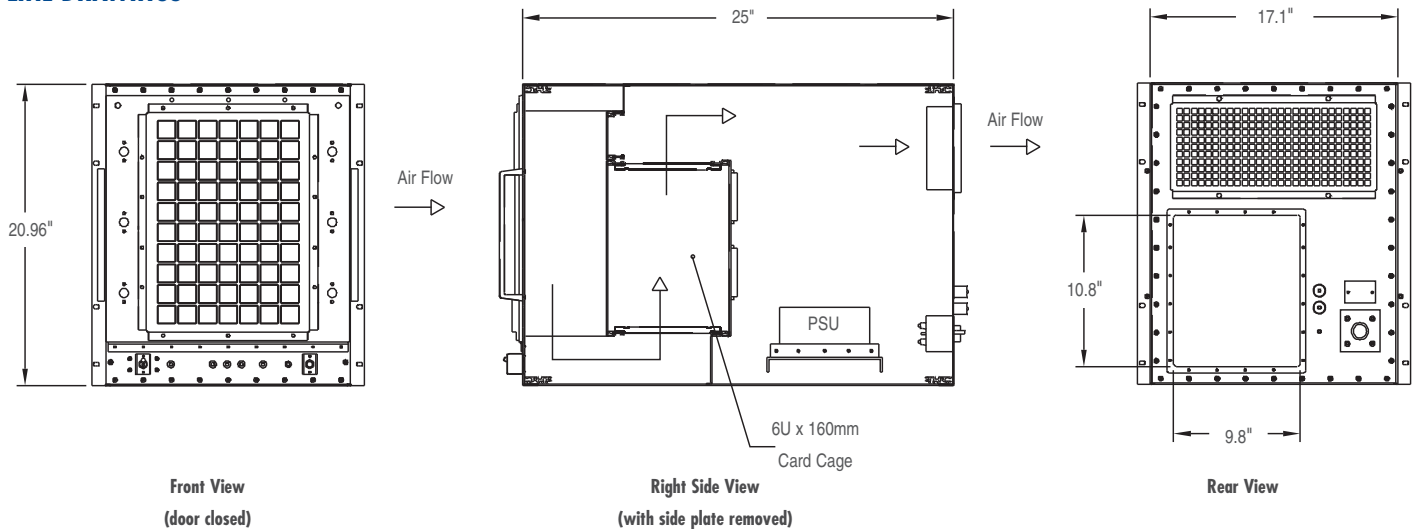

CUSTOM CONFIGURATIONS

1 2 R 2 ■ ■ ■ ■ ■ ■ ■ 8 ■ ■ ■ ■ ■

■ NUMBER OF SLOTS BP

00-20: Single BP AY-YA: Split
Example: 7 slot = 07
Example: 12 + 9 = LI

■ BP BARE BOARD

A = CPCI (RSS), 6U
K = VITA 31.1
L = VXS (DS)
M = V64, J12 mono, 3 row
N = VME64X, 6U
O = VME64X, 7U
P = VPX, 6U (VITA 46)
S = VXS (SS)
T = VXS (Mesh)
X = No BP installed
Z = Custom

■ BP CONNECTOR CONFIG. J1/J2/P0

L = 5 row, w/o P0, w/ RT-2
M = 3 row, J1 flush, J2 13mm
N = 3 row, J1/J2, 17mm
O = 5 row, w/o PO
P = 5 row, w/ PO
Q = 3 row, 13mm
R = 3 row, 17mm
S = RT-2 (J0-J6) 6U
D = CPCI (P1 & P2 S; P3, P4, P5 L)
X = No connectors
Z = Custom

■ DRIVES

1 = 1 X 3.5"
2 = 2 X 3.5"
3 = 1 X 5.25" HH
4 = 2 X 5.25" HH
5 = 4 X 5.25" HH
6 = 2 X 3.5", 1 X 5.25"HH
7 = 1 X 3.5", 2 X 5.25"HH
9 = 1 X 3.5", 1 X 5.25"HH
A = 1 x 2.5", 1 X CDROM (SL)
B = 2 x 2.5"
C = 6 x 5.25" HH
D = 1 x slim line CDROM
X = Not installed

■ DEVICE MOUNTING

F = Fixed mount devices
I = Shock isolated devices
X = N/A

■ HEIGHT

9 = 9U

■ WIDTH

8 = 84T

■ CARD CAGE

Y = Fixed w/ Rear I/O
N = Fixed no Rear I/O
F = Isolated w/ Rear I/O
I = Isolated no Rear I/O

■ DEPTH

4 = 400mm - 499mm
5 = 500mm - 599mm (22")
6 = 600mm - 699mm (25")
7 = 700mm - 799mm

■ CARD ORIENTATION

V = Vertical

■ PSU INPUT

C = 90-230VAC (Fixed)
G = 90-230VAC (Plug In)
H = 48VDC (Plug In)
K = 48VDC (Fixed)
M = 48VDC (2 x HS, N+1)
N = 28VDC (Fixed)
O = 28VDC (2 x HS, N+1)
P = 90-230VAC(2 x HS, N+1)
Q = MIL-STD-704A, 28VDC
R = MIL-STD-704A, 90-230VAC
S = Custom
X = No PSU

■ PSU OUTPUT

(Note: Not all PSU combinations available)

3 = 300-399 watt (w/o 3.3V)
5 = 500-599 watt (w/o 3.3V)
7 = 700-799 watt (w/o 3.3V)
8 = 800-899 watt (w/o 3.3V)
9 = 900-999 watt (w/o 3.3V)
A = 100-199 watt (w/ 3.3V)
B = 200-299 watt (w/3.3V)
C = 300-399 watt (w/3.3V)
D = 400-499 watt (w/3.3V)
E = 500-599 watt (w/3.3V)
F = 600-699 watt (w/ 3.3V)
G = 700-799 watt (w/ 3.3V)
H = 800-899 watt (w/3.3V)
I = 900-999 watt (w/3.3V)
J = 1000-1099 watt (w/3.3V)
K = 1100-1199 watt (w/3.3V)
L = 1200-1299 watt (w/3.3V)
M = 1300-1399 watt (w/3.3V)
N = 1400-1499 watt (w/3.3V)
X = Not installed

■ SHIELDING LEVEL

2 = Level 2
4 = MIL-STD-461
T = Tempest
X = Not installed

