

Type 11C, 4U - 19" Rackmount, Horizontal




FEATURES:

- 19" Rackmount fully compliant to IEEE 1101.10/.11
- 4U x 84HP x 290mm (H x W x D)
- Holds up to 6 slots, 6U cards
- PICMG: 2.0, 2.16, EXP.0 backplanes (H.110 optional)
- Cooling front to rear, plug removable
- Advanced EMC shielding to meet CE, FCC and NEBS
- Wide range of PSU inputs (90 - 264 VAC, 48VDC)
- Wide range of PSU options: fix mount, plug in, N+1
- Shelf Management: PICMG 2.9, IMPI (optional)
- Ready to run - turnkey solution


SCOPE OF SUPPLY

High quality 19" rackmount chassis platform consisting of pre-galvanized steel enclosures, high performance CPCI backplane, power supply, cooling system and AC/DC power components. Assembled, wired and tested prior to shipment.

ORDERING INFORMATION

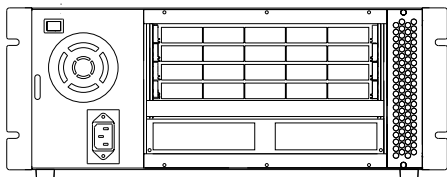


Description	Order Number
<ul style="list-style-type: none"> ■ 4U H x 84HP W x 290mm D ■ 4 slot, 6U x 160mm, front ■ 4 slot, 6U x 80mm, rear I/O ■ 4 slot BP, (PICMG 2.0, no/H.110) ■ 2 x 3.5", devices ■ 1 x 90 CFM fan, front to rear cooling ■ 1 x 300W PSU - ATX, Fixed 	11C04AD248Y2HC3X

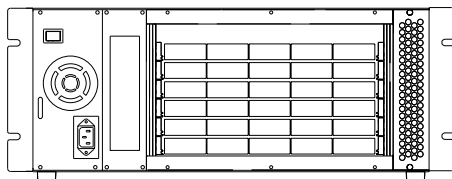


Description	Order Number
<ul style="list-style-type: none"> ■ 4U H x 84HP W x 290mm D ■ 6 slot, 6U x 160mm, front ■ 6 slot, 6U x 80mm, rear I/O ■ 6 slot BP, (PICMG 2.0, w/H.110) ■ 1 x 3.5", devices ■ 1 x 90 CFM fans, front to rear cooling ■ 1 x 250W, PSU - Front, quick connect 	11C06CI348Y2HC2X


LINE DRAWINGS

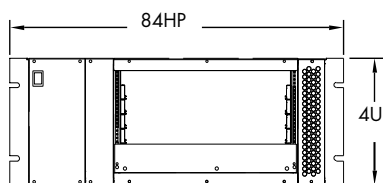

Front View



Top View



Rear View

ENVIRONMENTAL

	Operating	Storage / Transit
Temperature:	0°C to +50°C	-20°C to +70°C
Altitude:	6000 ft. (1,829m)	50,000 ft. (15,240m)
Humidity:	5% to 95% Non condensing	5% to 95% Non condensing
Shock:	10 Gs @ 11ms	15 Gs @ 11ms (per ASTM 0775)
Vibration:	1.0 Gs @ 10 to 330 Hz	1.2 Gs @ 5 to 330 Hz
Agencies:	Designed to meet UL 1950, FCC Class A or B, CE	

CUSTOM CONFIGURATIONS

11C 4 8 2 H

NUMBER OF SLOTS

- 00-21: Single BP; AY-YA Split
- 02 = 2 slot
- 04 = 4 slot
- 06 = 6 slot

BP BARE BOARD

- A = 6U Std, ATX, (RSS)
- B = 3U Rev. 2.0
- C = 6U H110
- D = 6U (LSS)
- E = 2.16, 1 x FS (no H.110)
- F = 2.16, 2 x FS (no H.110)
- H = 2.16, 2 x FS (w/ H.110)
- I = 2.16, 1 x FS (w/ H.110)
- L = CPCIe (1 SS, 1 x type, 2 x type2)
- U = CPCIe (1 SS, 1 x type1, 2 x type2, 2 cPCI)
- X = No BP installed
- Z = Custom

BP CONNECTOR

- (CONFIGURATION: P1 - P5)
- A = P1 & P2 S; No P3, P4, P5
 - B = P1 S, P2 L; No P3, P4, P5
 - C = P1, P2 & P4 S; P3 & P5 L
 - D = P1 & P2 S; P3, P4, P5 L
 - E = P1 S; P2, P3, P4, P5 L
 - F = P1 & P4 S; P2, P3, P5 L
 - G = P1 & P2 S; P3 L, no P4, P5
 - H = 2 x PC: P1, P2 & P4 S; P3 & P5 L
 - I = 2 x 47 PIN power
 - X = No connectors
 - Z = Custom

DRIVES

- 1 = 1 x 3.5"
- 2 = 2 x 3.5"
- 3 = 1 x 5.25" HH
- 4 = 2 x 5.25" HH
- 5 = 4 x 5.25" HH
- 6 = 2 x 3.5", 1 x 5.25" HH
- 7 = 1 x 3.5", 2 x 5.25" HH
- 9 = 1 x 3.5", 1 x 5.25" HH
- A = 1 x 2.5", 1 x CDROM (SL)
- B = 2 x 2.5"
- X = Not Installed

HEIGHT

- 4 = 4U

WIDTH

- 8 = 84 T

REAR I/O

- N = No
- Y = Yes

DEPTH

- 2 = 200 - 299mm

CARD ORIENTATION

- V = Vertical
- H = Horizontal

PSU INPUT

- C = 90 - 230VAC (Fixed)
- E = 110/220VAC (2 x HS, N+1)
- G = 90 - 230VAC (Plug-in)
- H = 48VDC (Plug-in)
- K = 48VDC (Fixed)
- M = 48VDC (2 x HS, N+1)
- P = 90-230VAC (2 x HS, N+1)
- Q = 90-230VAC (3 x HS, N+1)
- R = 28VDC (Fixed)
- S = 48VDC (3 x HS, N+1)
- X = No PSU

PSU OUTPUT

- (NOT ALL PSU COMBINATIONS AVAILABLE)
- 1 = 100 - 199 watts (w/o 3.3V)
 - 2 = 200 - 299 watts (w/o 3.3V)
 - 3 = 300 - 399 watts (w/o 3.3V)
 - 5 = 500 - 599 watts (w/o 3.3V)

VOLTAGE I/O

- 3 = 3.3V (Default)
- 5 = 5V
- X = Not Installed