

Incremental encoders

End shaft $\varnothing 10$ to $\varnothing 14$ mm

Resolution 50...1024 pulses

ITD 20 A 4 Y36



ITD 20 A 4 Y36 with end shaft

Features

- Encoder with end shaft $\varnothing 10$ -14 mm
- Resolution max. 1024 ppr
- Optical sensing
- Mounting by torque support
- TTL or HTL output signals
- Cable output radial

Optional

- Cable with connector

Technical data - electrical ratings

Voltage supply	5 VDC ± 5 % 8...30 VDC
Reverse polarity protection	Yes
Consumption w/o load	≤ 100 mA
Resolution (steps/turn)	50...1024
Reference signal	Zero pulse, width 90°
Sensing method	Optical
Output frequency	≤ 120 kHz
Output signals	A, B, N + inverted
Output circuit	TTL linedriver (short-circuit proof) HTL push-pull (short-circuit proof)
Interference immunity	DIN EN 61000-6-2
Emitted interference	DIN EN 55011

Technical data - mechanical design

Dimensions (flange)	$\varnothing 58$ mm
Shaft	$\varnothing 10$ mm end shaft $\varnothing 12$ mm end shaft $\varnothing 14$ mm end shaft
Motor shaft tolerance	0.25 mm axial 0.1 mm radial
Mounting kit variant	006
Protection DIN EN 60529	IP 65
Operating speed	≤ 8000 rpm
Starting torque	≤ 0.01 Nm
Materials	Housing: aluminium, black, powder-coated Shaft: stainless steel
Operating temperature	$-20 \dots +70$ °C
Relative humidity	90 % non-condensing
Resistance	DIN EN 60068-2-6 Vibration 10 g, 55-2000 Hz DIN EN 60068-2-27 Shock 100 g, 11 ms
Connection	Cable 1 m
Weight approx.	280 g

Incremental encoders

End shaft $\varnothing 10$ to $\varnothing 14$ mm

Resolution 50...1024 pulses

ITD 20 A 4 Y36

Part number

ITD 20 A 4 Y36

			KR1	S		IP65	006
--	--	--	-----	---	--	------	-----

Mounting kit

006 Mounting accessory kit 006

Protection

IP65 IP 65

End shaft

10 End shaft $\varnothing 10$ mm

12 End shaft $\varnothing 12$ mm

14 End shaft $\varnothing 14$ mm

Operating temperature

S -20...+70 °C

Connection

KR1 Cable 1 m, radial

Output signals

BI A, A inv, B, B inv

NI A, A inv, B, B inv, 0, 0 inv

Voltage supply / signals

T 5 VDC / TTL level, linedriver

H 8...30 VDC / HTL level, push pull

R 8...30 VDC / TTL level, linedriver

See part number (pulses)

Part number (pulses)

50	90	200	360	600
60	100	250	400	1000
64	120	254	500	1024
88	128	256	512	

Incremental encoders

End shaft $\varnothing 10$ to $\varnothing 14$ mm


Resolution 50...1024 pulses

ITD 20 A 4 Y36


Output signals

Clockwise rotation when looking at the mounting side.

BI-Output signals

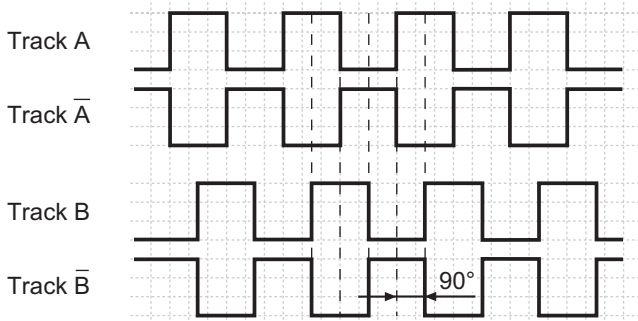

NI-Output signals

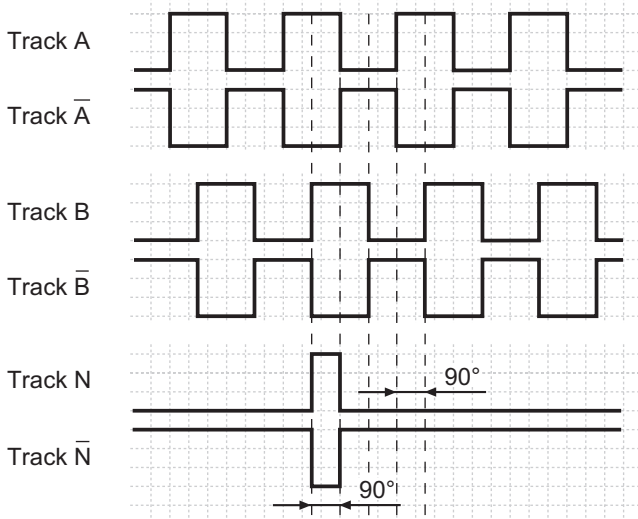

Terminal assignment

Core colour	Assignment
brown	Track A
green	Track A inv.
grey	Track B
pink	Track B inv.
red	Track N
black	Track N inv.
brown 0,5 mm ²	UB
white 0,5 mm ²	GND
blue	UB-Sense
white	GND-Sense
transparent	Shield/Housing


Trigger level

Outputs	Linedriver
Output level High	≥ 2.4 V
Output level Low	≤ 0.5 V
Load	≤ 70 mA

Outputs	Push-pull short-circuit proof
Output level High	$\geq UB - 3$ V
Output level Low	≤ 1.5 V
Load	≤ 70 mA

Dimensions

mounting side
(proposition)

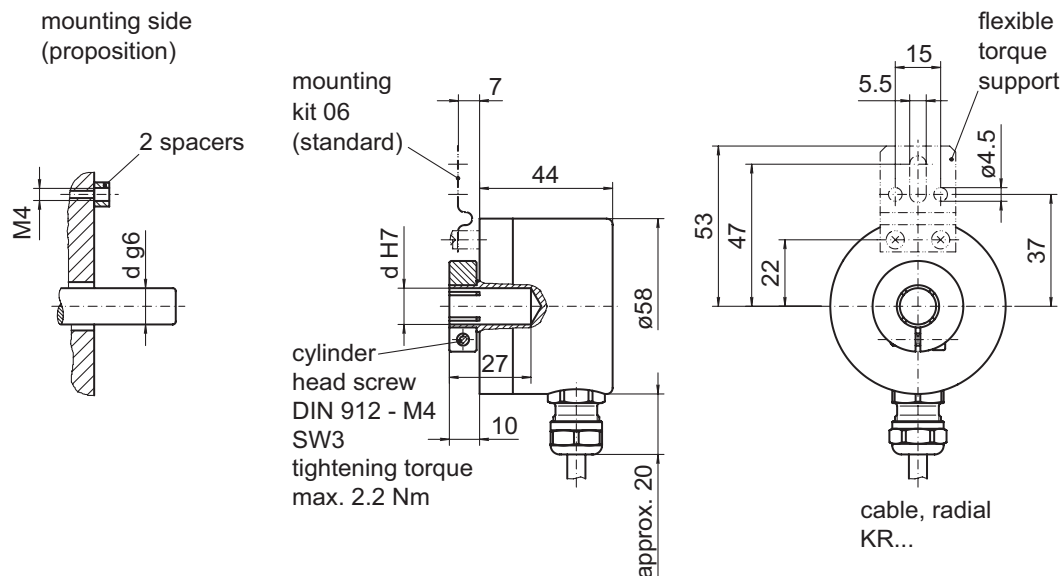

029- 1 Y36

Incremental encoders

End shaft \varnothing 10 to \varnothing 14 mm

Resolution 50...1024 pulses

ITD 20 A 4 Y36