

Incremental encoders

End shaft $\varnothing 10$ to $\varnothing 14$ mm

Resolution 100...6000 pulses

ITD 21 A 4 Y109



ITD 21 A 4 Y109 with end shaft

Technical data - electrical ratings

Voltage supply	5 VDC $\pm 5\%$ 8...30 VDC
Reverse polarity protection	Yes
Consumption w/o load	≤ 100 mA
Resolution (steps/turn)	100...6000
Reference signal	Zero pulse, width 90°
Sensing method	Optical
Output frequency	≤ 300 kHz (TTL) ≤ 160 kHz (HTL)
Output signals	A, B, N + inverted
Output circuit	TTL linedriver (short-circuit proof) HTL push-pull (short-circuit proof)
Interference immunity	DIN EN 61000-6-2
Emitted interference	DIN EN 55011

Features

- Encoder with end shaft $\varnothing 10$ -14 mm
- Resolution max. 6000 ppr
- Optical sensing
- Anodised version
- Mounting by torque support
- TTL or HTL output signals
- Cable output radial
- High protection standard

Optional

- Cable with connector

Technical data - mechanical design

Dimensions (flange)	$\varnothing 68$ mm
Shaft	$\varnothing 10$ mm end shaft $\varnothing 12$ mm end shaft $\varnothing 14$ mm end shaft
Motor shaft tolerance	0.25 mm axial 0.1 mm radial
Mounting kit variant	038
Protection DIN EN 60529	IP 66
Operating speed	≤ 5000 rpm
Starting torque	≤ 0.03 Nm
Materials	Housing: aluminium, anodised Shaft: stainless steel
Operating temperature	$-20 \dots +70$ °C
Relative humidity	90 % non-condensing
Resistance	DIN EN 60068-2-6 Vibration 10 g, 55-2000 Hz DIN EN 60068-2-27 Shock 30 g, 11 ms
Connection	Cable 1 m
Weight approx.	410 g

Incremental encoders

End shaft ø10 to ø14 mm


Resolution 100...6000 pulses

ITD 21 A 4 Y109

Part number

ITD 21 A 4 Y109

		NI	KR1	S		IP66	038
--	--	----	-----	---	--	------	-----

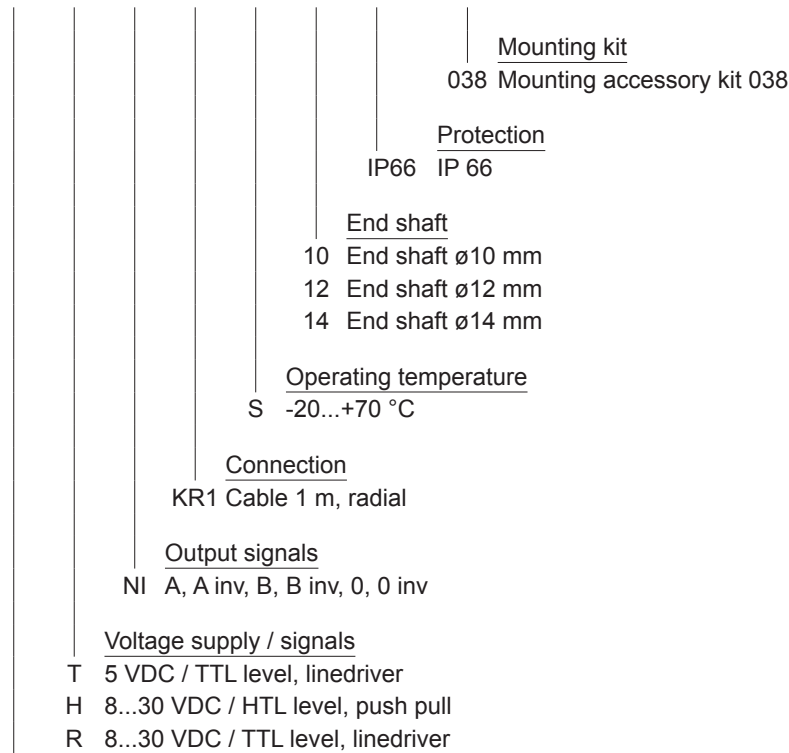

See part number (pulses)

Part number (pulses)

100	360	900	1800	4096
120	400	1000	2000	5000
150	500	1024	2048	6000
200	512	1200	2500	
250	600	1250	3000	
256	720	1440	3600	
300	800	1500	4000	

Incremental encoders

End shaft \varnothing 10 to \varnothing 14 mm

Resolution 100...6000 pulses

ITD 21 A 4 Y109