

Incremental encoders

Shaft $\varnothing 10$ mm with clamping flange

Resolution 1000...6000 pulses

ITD 21 B14 Y 9



ITD 21 B14 Y 9 with clamping flange

Technical data - electrical ratings

Voltage supply	5 VDC $\pm 5\%$ 8...30 VDC
Reverse polarity protection	Yes
Consumption w/o load	≤ 100 mA
Resolution (steps/turn)	1000...6000
Reference signal	Zero pulse, width 90°
Sensing method	Optical
Output frequency	≤ 300 kHz (TTL) ≤ 160 kHz (HTL)
Output signals	A, B, N + inverted
Output circuit	TTL linedriver (short-circuit proof) HTL push-pull (short-circuit proof)
Interference immunity	DIN EN 61000-6-2
Emitted interference	DIN EN 55011

Features

- Encoder with shaft $\varnothing 10$ mm
- Resolution max. 6000 ppr
- Optical sensing
- Centering alignment $\varnothing 36$ mm, mounting screw hole circle $\varnothing 48$ mm
- Industrial standard
- TTL or HTL output signals
- Cable output radial or axial

Optional

- Cable with connector
- Extended operating temperature range

Technical data - mechanical design

Dimensions (flange)	$\varnothing 58$ mm
Shaft	$\varnothing 10$ mm (clamping flange)
Shaft loading	≤ 40 N axial ≤ 60 N radial
Flange	Clamping flange
Protection DIN EN 60529	IP 65
Operating speed	≤ 12000 rpm
Starting torque	≤ 0.01 Nm
Materials	Housing: aluminium, black, powder-coated Shaft: stainless steel
Operating temperature	$-20...+70$ °C $-20...+100$ °C
Relative humidity	90 % non-condensing
Resistance	DIN EN 60068-2-6 Vibration 10 g, 55-2000 Hz DIN EN 60068-2-27 Shock 30 g, 11 ms
Connection	Cable 1 m
Weight approx.	340 g

Incremental encoders


Shaft \varnothing 10 mm with clamping flange
Resolution 1000...6000 pulses

ITD 21 B14 Y 9

Part number

ITD 21 B14 Y 9

		NI			10	IP65
--	--	----	--	--	----	------

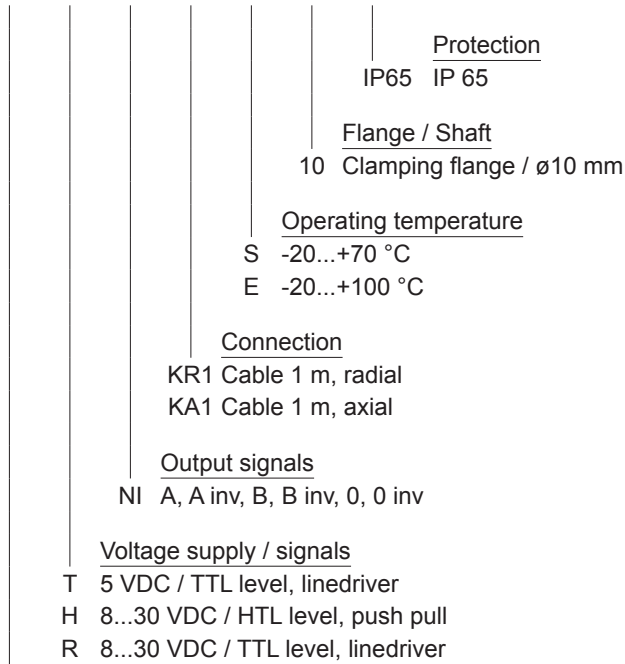

See part number (pulses)

Part number (pulses)

1000	1440	2048	4000
1024	1500	2500	4096
1200	1800	3000	5000
1250	2000	3600	6000

Incremental encoders


Shaft $\varnothing 10$ mm with clamping flange
Resolution 1000...6000 pulses

ITD 21 B14 Y 9

Output signals

Clockwise rotation when looking at the mounting side.

NI-Output signals

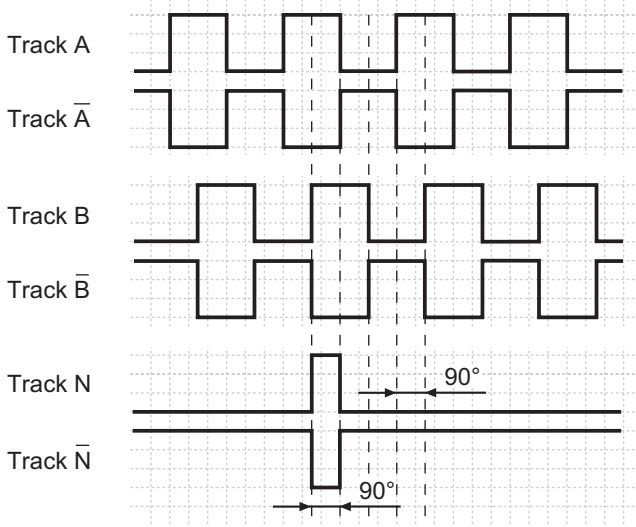

Terminal assignment


Core colour	Assignment
brown	Track A
green	Track A inv.
grey	Track B
pink	Track B inv.
red	Track N
black	Track N inv.
brown 0,5 mm ²	UB
white 0,5 mm ²	GND
blue	UB-Sense
white	GND-Sense
transparent	Shield/Housing

Trigger level

Outputs	Linedriver
Output level High	≥ 2.4 V
Output level Low	≤ 0.5 V
Load	≤ 70 mA

Outputs	Push-pull short-circuit proof
Output level High	$\geq UB - 3$ V
Output level Low	≤ 1.5 V
Load	≤ 70 mA

Dimensions

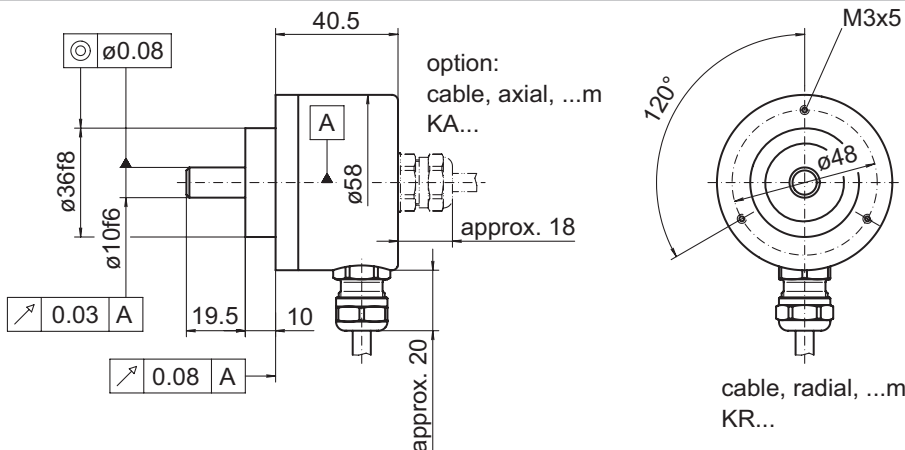

027- 4 Y 9

Incremental encoders
Shaft \varnothing 10 mm with clamping flange
Resolution 1000...6000 pulses

ITD 21 B14 Y 9