

# Absolute encoders - SSI

## Shaft ø10 mm with clamping flange

### Magnetic multiturn encoders 12 bit ST / 13 bit MT

#### BMMV 58 SSI - MAGRES hermetic



BMMV 58K SSI with clamping flange

#### Features

- Encoder multiturn / SSI
- Magnetic sensing, hermetically sealed
- Resolution: singleturn 12 bit, multiturn 13 bit
- High resistance to shock and vibrations
- Reset input
- Protection IP 69K
- Material: stainless steel 1.4305

#### Technical data - electrical ratings

Voltage supply	5 VDC ±10 % 10...30 VDC
Consumption w/o load (typ.)	100 mA (5 VDC) 50 mA (24 VDC)
Initializing time (typ.)	170 ms after power on
Interface	SSI
Function	Multiturn
Steps per turn	4096 / 12 bit
Number of turns	8192 / 13 bit
Absolute accuracy	±1 °
Sensing method	Magnetic
Code	Gray or binary
Code sequence	CW: ascending values with clockwise sense of rotation (looking at flange)
Inputs	SSI clock Reset input
Output circuit	SSI data: linedriver RS485
Interference immunity	DIN EN 61000-6-2
Emitted interference	DIN EN 61000-6-3
Approval	UL approval / E217823

#### Technical data - mechanical design

Dimensions (flange)	ø58 mm
Shaft	ø10 mm (clamping flange)
Flange	Clamping flange
Protection DIN EN 60529	IP 68, IP 69K
Operating speed	≤6000 rpm
Operating torque typ.	0.031 Nm
Shaft loading	≤120 N axial (combined) ≤280 N radial (combined) ≤270 N axial (concentrated load)
Materials	Stainless steel 1.4305 (other materials on request)
Operating temperature	-40...+85 °C
Resistance	DIN EN 60068-2-6 Vibration 30 g, 10-2000 Hz DIN EN 60068-2-27 Shock 500 g, 6 ms
Explosion protection	Ex II3D Txx °C (Zone 22) (only cable version)
Weight approx.	690 g
Connection	Connector M12, 8-pin Cable

# Absolute encoders - SSI

## Shaft $\varnothing 10$ mm with clamping flange

### Magnetic multiturn encoders 12 bit ST / 13 bit MT

#### BMMV 58 SSI - MAGRES hermetic

#### Part number

#### Multiturn clamping flange

BMMV 58K5   12/13 H0

2 Connection  
Cable radial, Ex  
Zone 22

5 Cable radial  
N Connector  
M12, 5-pin,  
radial

Shaft  
H0  $\varnothing 10$  mm, IP 68 and  
IP 69K

Resolution  
12/13 12/13 bit single-/multiturn

Voltage supply / signals  
05C 5 VDC / SSI  
24C 10...30 VDC / SSI

Code  
N Binary code  
G Gray code

#### Accessories


#### Connectors and cables

10146775	Female connector M12, 8-pin, straight
10127844	Female connector M12, 8-pin, straight, shielded, 2 m
10129332	Female connector M12, 8-pin, straight, shielded, 5 m cable

#### Mounting accessories

10252773	Clamp set
11053277	Bellows coupling aluminium/stainless steel 10 mm

#### Data transfer

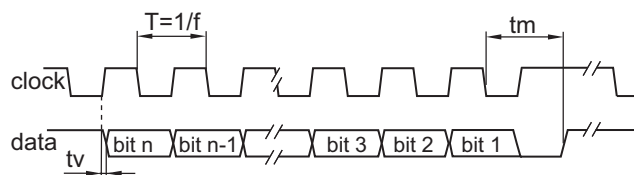

Clock frequency f	100...1000 kHz
Scan ratio of T	40...60 %
Time lag tv	200 ns
Monoflop time tm	20 $\mu$ s + T/2

# Absolute encoders - SSI

## Shaft $\varnothing$ 10 mm with clamping flange

### Magnetic multiturn encoders 12 bit ST / 13 bit MT

#### BMMV 58 SSI - MAGRES hermetic

##### Terminal significance

+Vs	Encoder supply voltage.
0 V	Encoder ground connection relating to +Vs.
Data+	Positive, serial data output of differential linedriver.
Data-	Negative, serial data output of differential linedriver.
Clock+	Positive SSI clock input. Clock+ together with Clock- forms a current loop. A current of approx. 7 mA towards Clock+ input means logic 1 in positive logic.
Clock-	Negative SSI clock input. Clock- together with Clock+ forms a current loop. A current of approx. 7 mA towards Clock- input means logic 0 in positive logic.
Zero	Input for setting a zero point anywhere within the encoder resolution. The zero setting operation is triggered by a Low impulse. Connect to +Vs after setting operation for maximum interference immunity. Impulse duration >2 ms.
Rot. direction	Ascending position values when looking at the flange and rotating the shaft clockwise.

##### Terminal assignment

###### Cable


for connection reference -5

Core colour	Signals	Description
brown	+Vs	Supply voltage
white	0 V	Supply voltage
grey	Data+	Data signal
pink	Data-	Data signal
green	Clock+	Clock signal
yellow	Clock-	Clock signal
blue	Zero	Zero setting input
red	d.u.	do not use
Screen	connected to housing	
Cable data	8 x 0,14 mm <sup>2</sup>	

###### Connector M12 male

for connection reference -N

Connector	Signals	Description
Pin 1	0 V	Supply voltage
Pin 2	+Vs	Supply voltage
Pin 3	Clock+	Clock signal
Pin 4	Clock-	Clock signal
Pin 5	Data+	Data signal
Pin 6	Data-	Data signal
Pin 7	Zero	Zero setting input
Pin 8	d.u.	do not use



##### Trigger level

Control inputs	Input circuit
Input level Low	<0,4 V (>2 ms)
Input level High	+Vs or open


# Absolute encoders - SSI

Shaft  $\varnothing 10$  mm with clamping flange  
Magnetic multiturn encoders 12 bit ST / 13 bit MT


## BMMV 58 SSI - MAGRES hermetic

### Dimensions

BMMV 58 SSI, cable radial

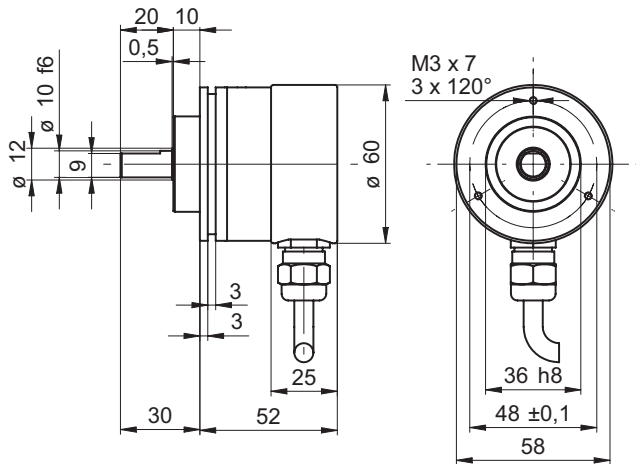

BMMV 58 SSI, connector M12 radial

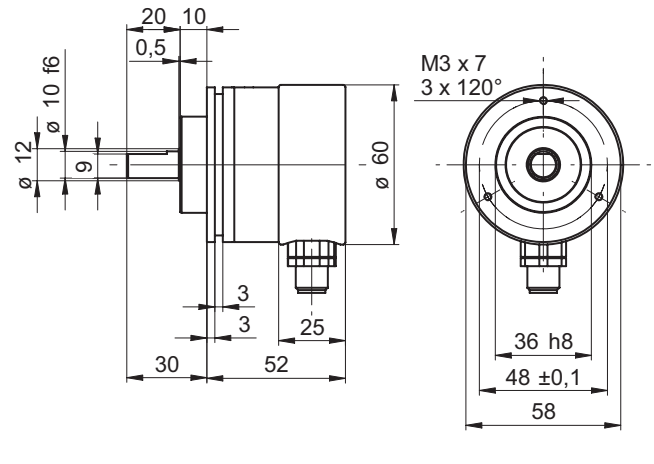

BMMV 58 SSI, cable radial, Ex

