




SECTION A-A  
(VIEW FROM FRONT)

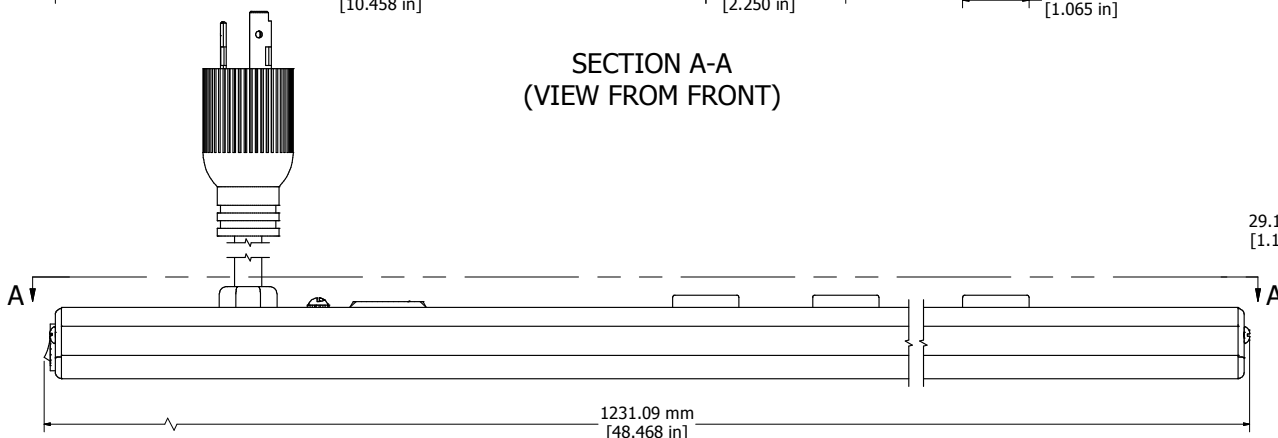

ASSEMBLY - VIEW FROM SIDE

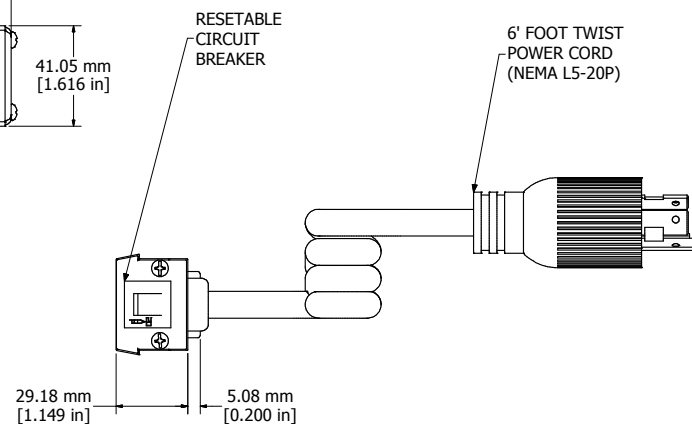

ASSEMBLY - VIEW FROM END

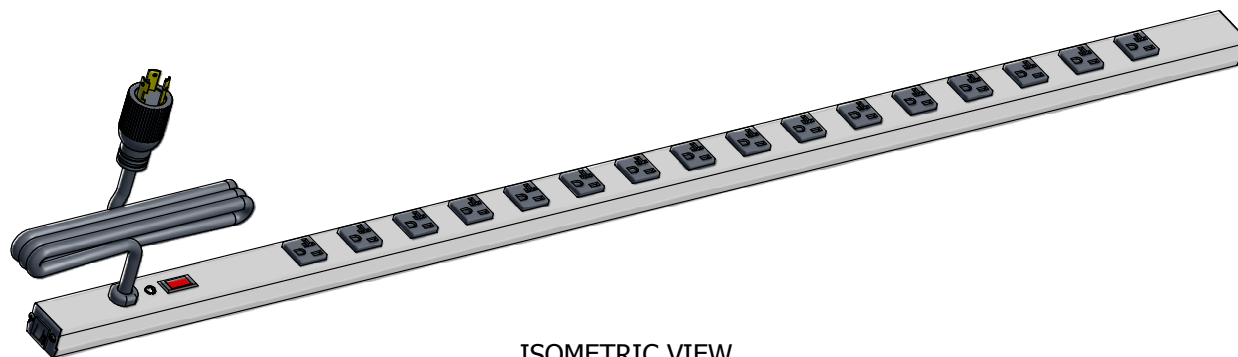

ISOMETRIC VIEW

1589T48C116
Finish - Case - Anodized Aluminum Extrusion
Ends - ABS Plastic
Rated - 125 VAC, 60 Hz, 20 Amps
Approvals - CSA Certified Standards C22.2 (No. 21-95, 42-99) - UL Listed Standard UL1363
Cord Length
1589T48C116 - 6' Foot Twist Power Cord (NEMA L5-20P)
1589T48D116 - 15' Foot Twist Power Cord (NEMA L5-20P)
Accessories Included
Mounting Bracket Kit with Hardware

**HAMMOND**  
**MANUFACTURING™**  
**1589T48C116**  
www.hammondmfg.com