

## Type 4/3R Mild Steel Splitter Trough *CN4ST Series*

### Hinge Door with Quarter Turn

#### Application

- The splitter troughs are designed for distribution of up to 600 V (max) service using either 3 or 4 wires.



#### Standards

- CSA Certified Type 3R, 12, 4
- Complies with
  - IEC 60529, IP66

#### Construction

- Formed 14 and 16 gauge steel.
- Factory installed splitter blocks.
- Smooth, continuously welded seams ground smooth.
- Door stiffeners are provided where required for increased strength and rigidity - designed to also permit additional mounting options.
- Formed lip on enclosure to exclude flowing liquids and contaminants.
- Door latches feature the added safety of quarter turn slot requiring use of tool for opening.
- Doors may be easily removed for modifications and are interchangeable.
- Seamless poured-in place gasket.
- Collar studs provided for mounting inner panel.
- Includes hardware kit with panel mounting nuts and sealing washers for wall mounting holes.
- Hinges are constructed from 304 stainless steel.
- Hinge pins are stainless steel.
- Inner panel is included.






#### Finish

- Cover and enclosure are finished in recoatable smooth ANSI 61 gray powder coating.
- Inner panel is finished in white powder coating.

#### Accessories

- [Quarter Turn Inserts and Keys](#)
- [Rear Hole Plugs](#)
- [Quarter Turn Assemblies](#)
- [Padlock Adaptor](#)
- [Mounting Foot Kit](#)
- [Replacement Hinge Pins](#)
- [Touch-Up Spray Paint](#)

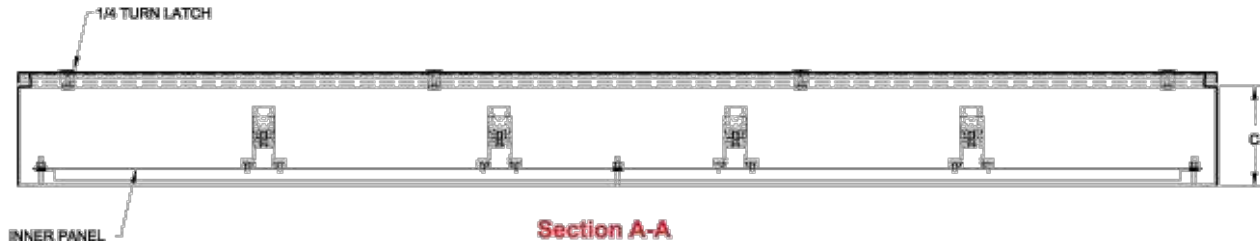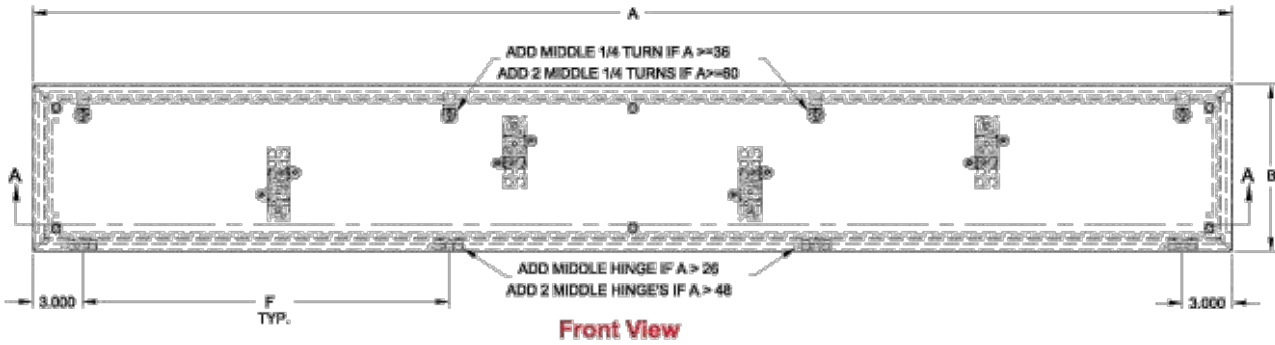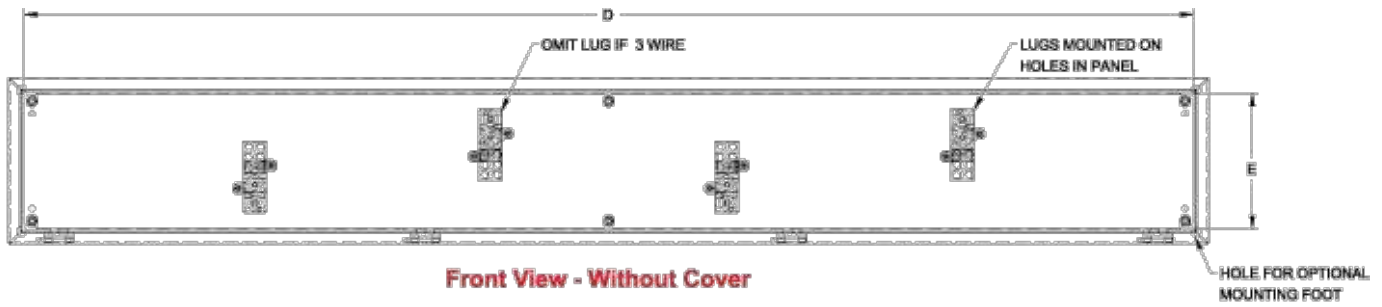

Part No.		Gauge	Optional Grounding Kit	CU/AL Amps	Dimensions						No. of Latches	No. of Hinges
3 Wire	4 Wire				A	B	C	D	E	F		
CN4ST273	CN4ST274	16	CGK225	70/70	24.00	6.00	5.00	22.17	4.17	N/A	2	2
CN4ST373	CN4ST374	16	CGK225	70/70	36.00	6.00	5.00	34.17	4.17	15.00	2	3
CN4ST473	CN4ST474	16	CGK225	70/70	48.00	6.00	5.00	46.17	4.17	15.00	3	3
CN4ST2103	CN4ST2104	16	CGK225	125/120	24.00	6.00	5.00	22.17	4.17	N/A	2	2
CN4ST3103	CN4ST3104	16	CGK225	125/120	36.00	6.00	5.00	34.17	4.17	15.00	2	3
CN4ST4103	CN4ST4104	16	CGK225	125/120	48.00	6.00	5.00	46.17	4.17	21.00	3	3
CN4ST6103	CN4ST6104	14	CGK225	125/120	72.00	8.00	6.00	70.17	6.17	21.00	4	4
CN4ST2203	-	14	CGK225	225/225	24.00	8.00	5.00	22.17	6.17	N/A	2	2
CN4ST3203	CN4ST3204	14	CGK225	225/225	36.00	8.00	6.00	34.17	6.17	15.00	2	3
CN4ST4203	CN4ST4204	14	CGK225	225/225	48.00	8.00	6.00	46.17	6.17	21.00	3	3
CN4ST5203	CN4ST5204	14	CGK225	225/225	60.00	8.00	6.00	58.17	6.17	18.00	4	4
CN4ST6203	CN4ST6204	14	CGK225	225/225	72.00	8.00	6.00	70.17	6.17	22.00	4	4
CN4ST3403	-	14	CGK400	400/340	36.00	10.00	6.00	34.17	8.17	15.00	2	3
CN4ST4403	CN4ST4404	14	CGK400	400/340	48.00	10.00	6.00	46.17	8.17	21.00	3	3
CN4ST5403	CN4ST5404	14	CGK400	400/340	60.00	10.00	6.00	58.17	8.17	21.00	4	4
CN4ST6403	CN4ST6404	14	CGK400	400/340	72.00	10.00	6.00	70.17	8.17	22.00	4	4
CN4ST4603	CN4ST4604	14	CGK400	600/574	48.00	10.00	6.00	46.17	8.17	21.00	3	3
CN4ST5603	CN4ST5604	14	CGK400	600/574	60.00	10.00	6.00	58.17	8.17	18.00	4	4
CN4ST6603	CN4ST6604	14	CGK400	600/574	72.00	10.00	6.00	70.17	8.17	22.00	4	4

Data subject to change without notice.

