




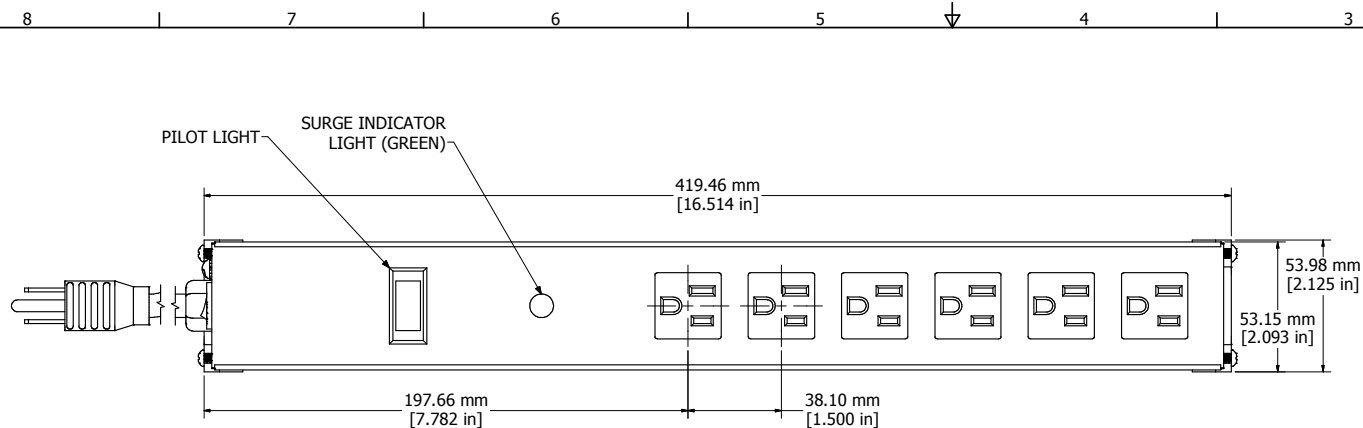


ASSEMBLY - VIEW FROM TOP

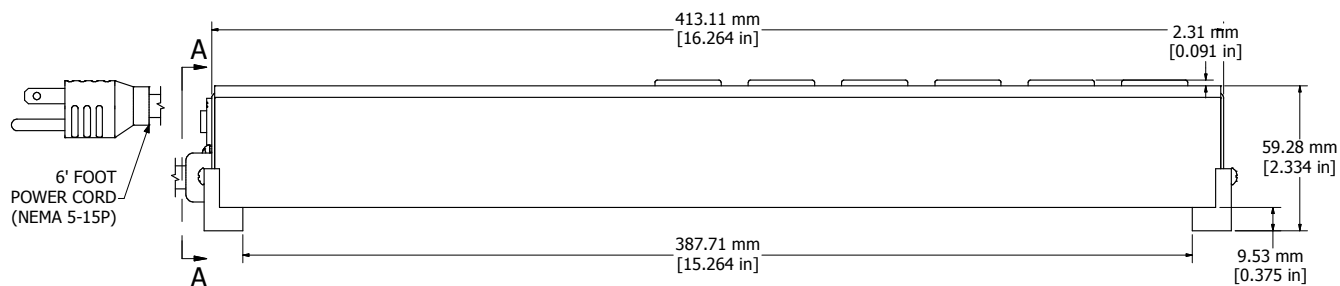


ASSEMBLY - VIEW FROM SIDE

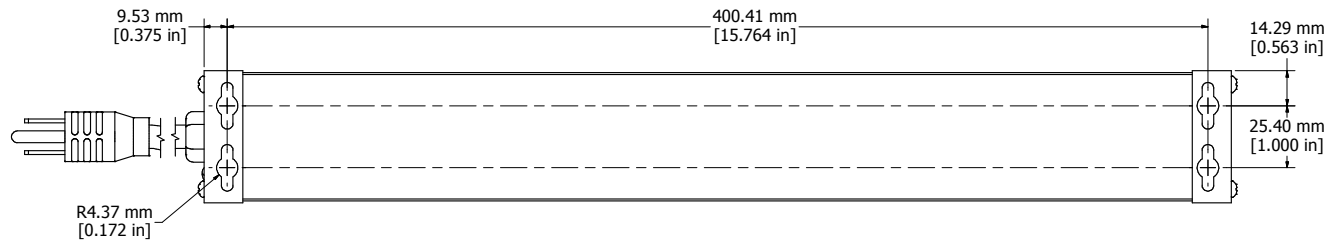

ASSEMBLY - VIEW FROM BOTTOM

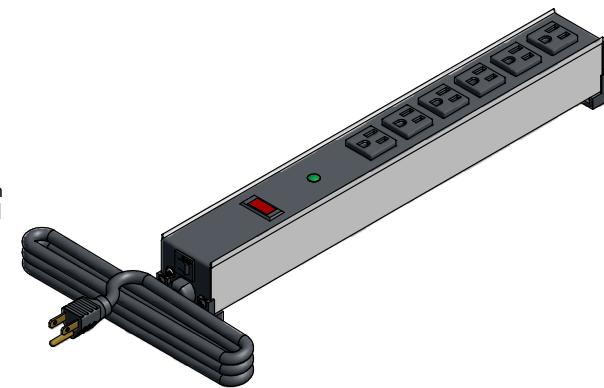

ISOMETRIC VIEW

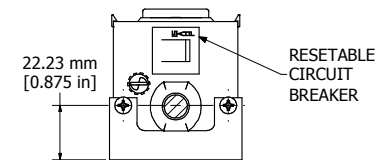

SECTION A-A

| 1584T6**S                                                                      |
|--------------------------------------------------------------------------------|
| Finish - Top - Black Painted Steel                                             |
| Bottom - Aluminum Extrusion                                                    |
| Rated - 120 VAC, 60 Hz, 15 Amps                                                |
| Approvals - CSA Certified Standards C22.2 (No. 21-95, 42-99) & CSA No. 8-M1986 |
| Surge Specs - 780 Joules, 54000 Amps Transient Current                         |
| - Protection in 3 AC Modes (L-N, N-G, L-G)                                     |
| Cord Length                                                                    |
| 1584T6A1S - 6' Foot Power Cord (NEMA 5-15P)                                    |
| 1584T6B1S - 15' Foot Power Cord (NEMA 5-15P)                                   |



**HAMMOND  
MANUFACTURING™**

**1584T6\*\*S**

[www.hammondmfg.com](http://www.hammondmfg.com)