


## Inductive proximity switch

## IFRM 12P17G3/L

## dimension drawing



## general data

mounting type	quasi shielded
special type	enhanced distance (GammaProx)
nominal sensing distance $S_n$	6 mm
hysteresis	2 ... 25 % of $S_r$
output indicator	LED red

## electrical data

switching frequency	< 400 Hz
voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	24 mA
output circuit	PNP make function (NO)
voltage drop Vd	< 2 VDC
output current	< 200 mA
short circuit protection	yes
reverse polarity protection	yes

## mechanical data

type	cylindrical threaded
material (sensing face)	PBT
housing material	brass nickel plated
dimension	12 mm
housing length	40 mm
connection types	cable, 2 m


## ambient conditions

operating temperature	-25 ... +75 °C
protection class	IP 67

## photo



## connection diagram

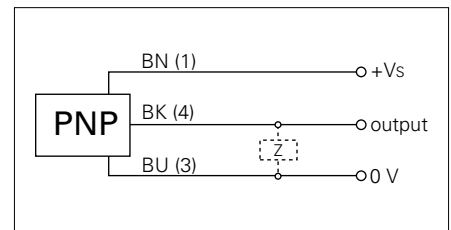

- Not for flush mounting in mild steel
- triple sensing distance
- load resistance:  $Z < 100 \text{ k}\Omega$  must be connected