




- ▼ Low On Resistance
- ▼ Capable of 2.5V Drive
- ▼ Fast Switching
- ▼ RoHS Compliant




| | |
|--------------|--------------|
| BV_{DSS} | -20V |
| $R_{DS(ON)}$ | 20m Ω |
| I_D | -9.5A |

Description

Advanced Power MOSFETs from APEC provide the designer with the best combination of fast switching, ruggedized device design, low on-resistance and cost-effectiveness.

The SO-8 package is widely preferred for all commercial-industrial surface mount applications and suited for low voltage applications such as DC/DC converters.



Absolute Maximum Ratings

| Symbol | Parameter | Rating | Units |
|----------------------------|---------------------------------------|------------|---------------------|
| V_{DS} | Drain-Source Voltage | -20 | V |
| V_{GS} | Gate-Source Voltage | ± 8 | V |
| $I_D@T_A=25^\circ\text{C}$ | Continuous Drain Current ³ | -9.5 | A |
| $I_D@T_A=70^\circ\text{C}$ | Continuous Drain Current ³ | -7.6 | A |
| I_{DM} | Pulsed Drain Current ¹ | -76 | A |
| $P_D@T_A=25^\circ\text{C}$ | Total Power Dissipation | 2.5 | W |
| | Linear Derating Factor | 0.02 | W/ $^\circ\text{C}$ |
| T_{STG} | Storage Temperature Range | -55 to 150 | $^\circ\text{C}$ |
| T_J | Operating Junction Temperature Range | -55 to 150 | $^\circ\text{C}$ |

Thermal Data

| Symbol | Parameter | Value | Unit |
|---------------|---|-------|---------------------------|
| $R_{thj-amb}$ | Maximum Thermal Resistance, Junction-ambient ³ | 50 | $^\circ\text{C}/\text{W}$ |



AP9620GM-HF

Electrical Characteristics@T_j=25°C(unless otherwise specified)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Units |
|---------------------|---|---|------|------|------|-------|
| BV _{DSS} | Drain-Source Breakdown Voltage | V _{GS} =0V, I _D =-250uA | -20 | - | - | V |
| R _{DS(ON)} | Static Drain-Source On-Resistance ² | V _{GS} =-4.5V, I _D =-9.5A | - | - | 20 | mΩ |
| | | V _{GS} =-2.5V, I _D =-6.0A | - | - | 35 | mΩ |
| V _{GS(th)} | Gate Threshold Voltage | V _{DS} =V _{GS} , I _D =-250uA | - | - | -1 | V |
| g _{fs} | Forward Transconductance | V _{DS} =-10V, I _D =-9.5A | - | 28 | - | S |
| I _{DSS} | Drain-Source Leakage Current | V _{DS} =-20V, V _{GS} =0V | - | - | -1 | uA |
| | Drain-Source Leakage Current (T _j =70°C) | V _{DS} =-16V, V _{GS} =0V | - | - | -25 | uA |
| I _{GSS} | Gate-Source Leakage | V _{GS} = ± 8V | - | - | ±100 | nA |
| Q _g | Total Gate Charge ² | I _D =-9.5A | - | 30 | - | nC |
| Q _{gs} | Gate-Source Charge | V _{DS} =-10V | - | 6 | - | nC |
| Q _{gd} | Gate-Drain ("Miller") Charge | V _{GS} =-5V | - | 3.5 | - | nC |
| t _{d(on)} | Turn-on Delay Time ² | V _{DS} =-10V | - | 26 | - | ns |
| t _r | Rise Time | I _D =-9.5A | - | 500 | - | ns |
| t _{d(off)} | Turn-off Delay Time | R _G =6Ω, V _{GS} =-4.5V | - | 70 | - | ns |
| t _f | Fall Time | R _D =1.05Ω | - | 300 | - | ns |
| C _{ISS} | Input Capacitance | V _{GS} =0V | - | 2158 | - | pF |
| C _{OSS} | Output Capacitance | V _{DS} =-15V | - | 845 | - | pF |
| C _{rSS} | Reverse Transfer Capacitance | f=1.0MHz | - | 230 | - | pF |

Source-Drain Diode

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Units |
|-----------------|--|--|------|------|-------|-------|
| I _S | Continuous Source Current (Body Diode) | V _D =V _G =0V , V _S =-1.2V | - | - | -2.08 | A |
| V _{SD} | Forward On Voltage ² | T _j =25°C, I _S =-2.5A, V _{GS} =0V | - | - | -1.2 | V |

Notes:

- 1.Pulse width limited by Max. junction temperature.
- 2.Pulse test
- 3.Surface mounted on 1 in² copper pad of FR4 board ; 125 °C/W when mounted on Min. copper pad.

THIS PRODUCT IS SENSITIVE TO ELECTROSTATIC DISCHARGE, PLEASE HANDLE WITH CAUTION.

USE OF THIS PRODUCT AS A CRITICAL COMPONENT IN LIFE SUPPORT OR OTHER SIMILAR SYSTEMS IS NOT AUTHORIZED.

APEC DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

APEC RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN.

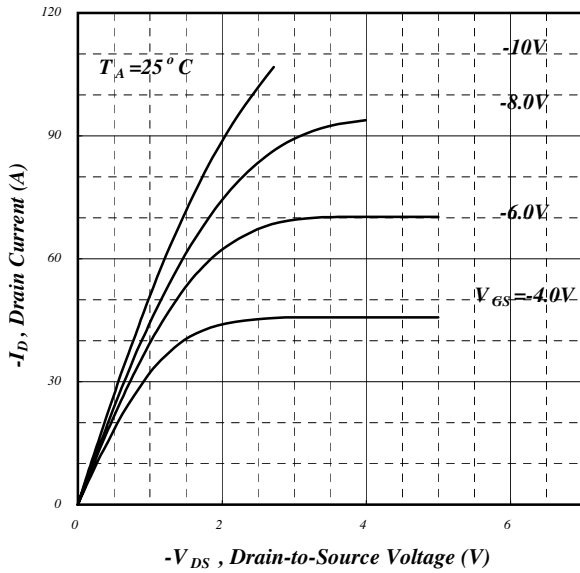


Fig 1. Typical Output Characteristics

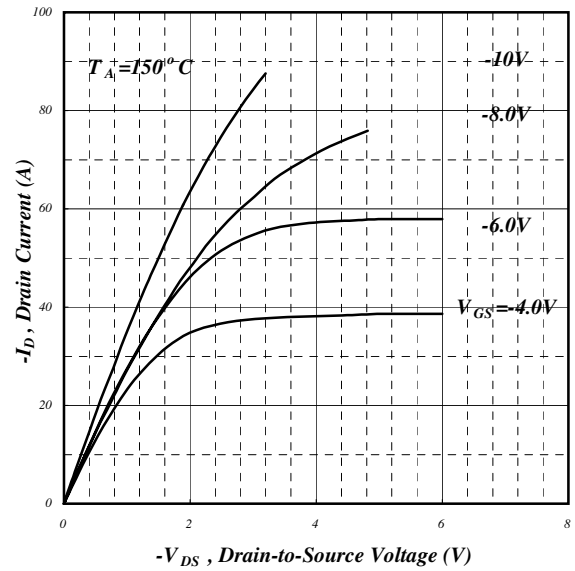


Fig 2. Typical Output Characteristics

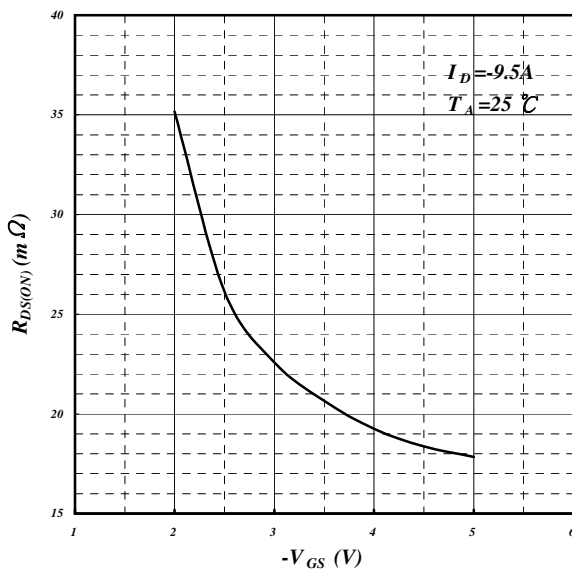


Fig 3. On-Resistance v.s. Gate Voltage

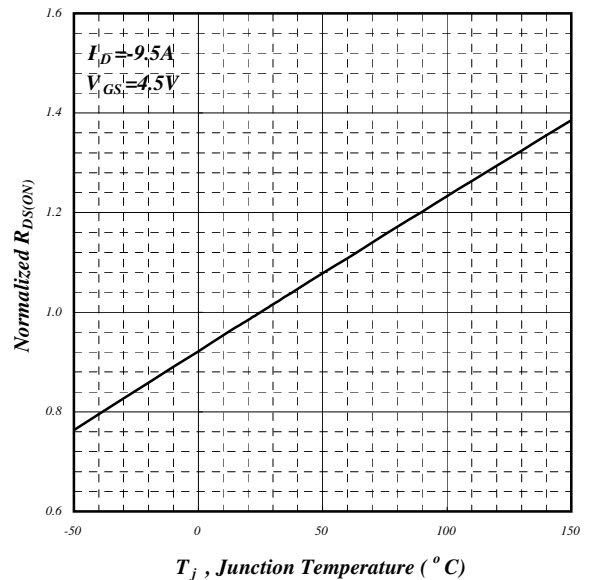


Fig 4. Normalized On-Resistance v.s. Junction Temperature

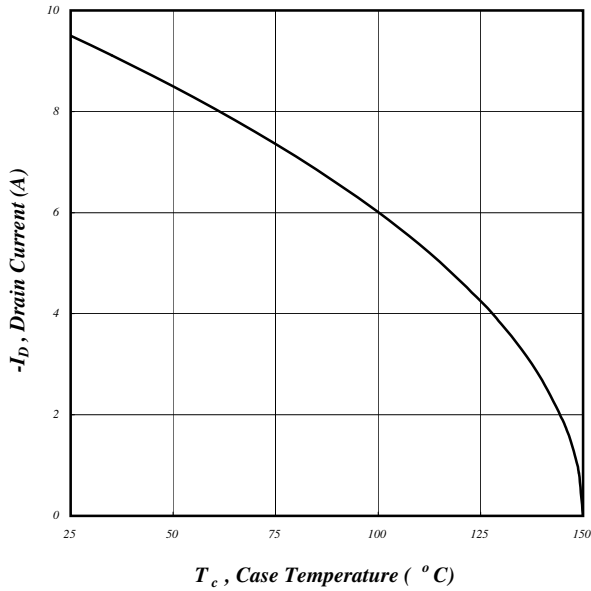


Fig 5. Maximum Drain Current v.s. Case Temperature

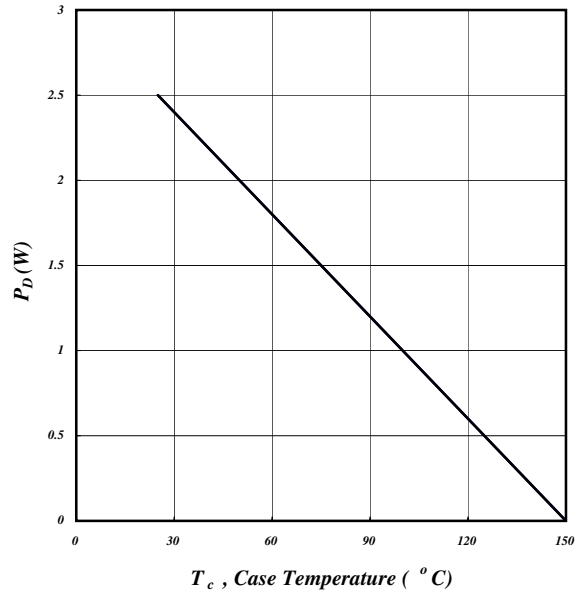


Fig 6. Typical Power Dissipation

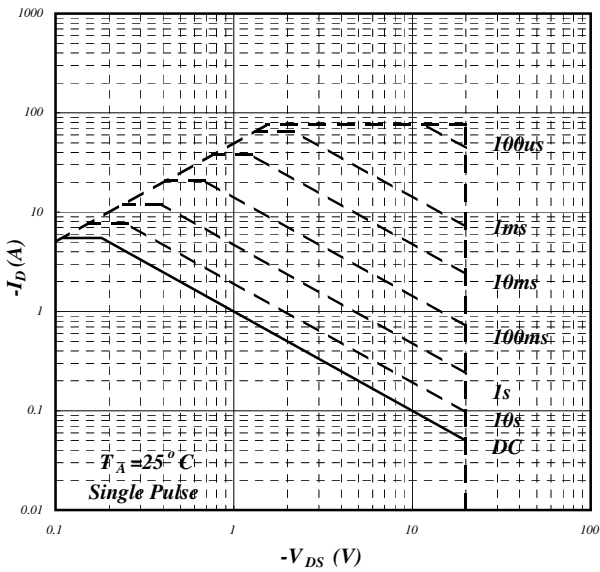


Fig 7. Maximum Safe Operating Area

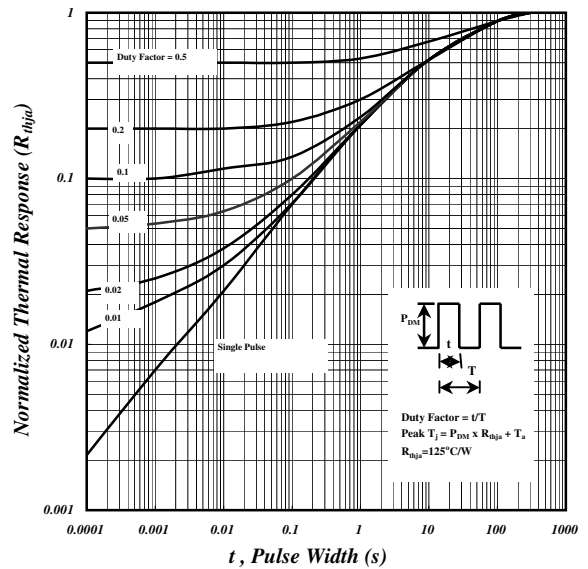


Fig 8. Effective Transient Thermal Impedance

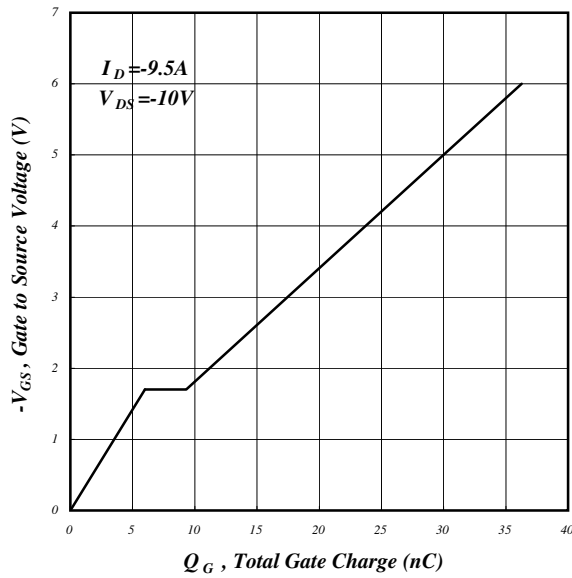


Fig 9. Gate Charge Characteristics

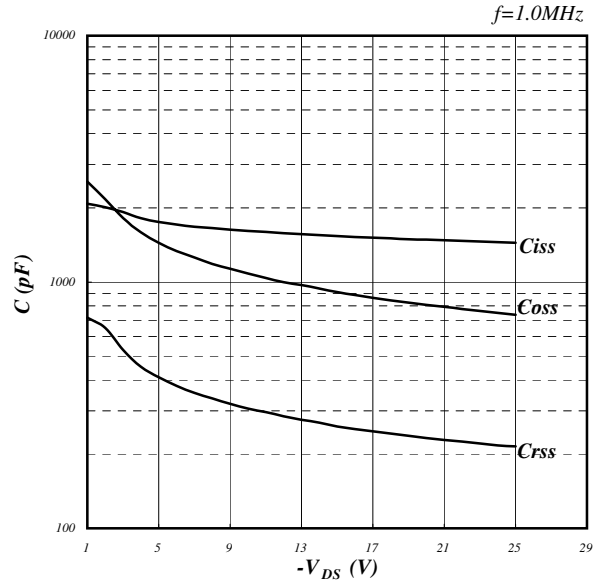


Fig 10. Typical Capacitance Characteristics

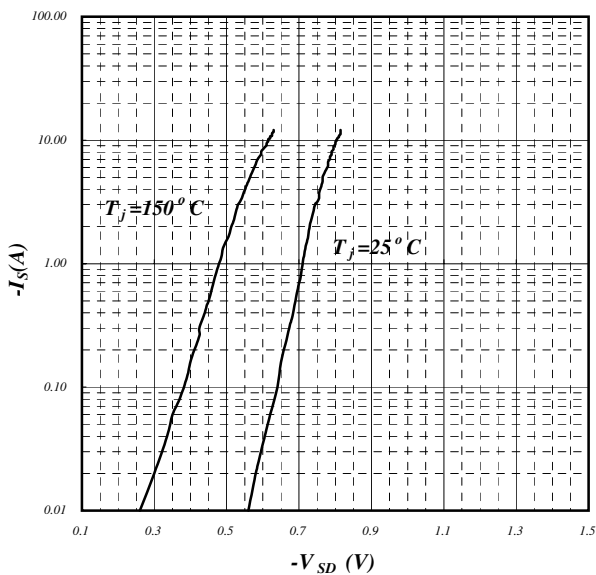


Fig 11. Forward Characteristic of Reverse Diode

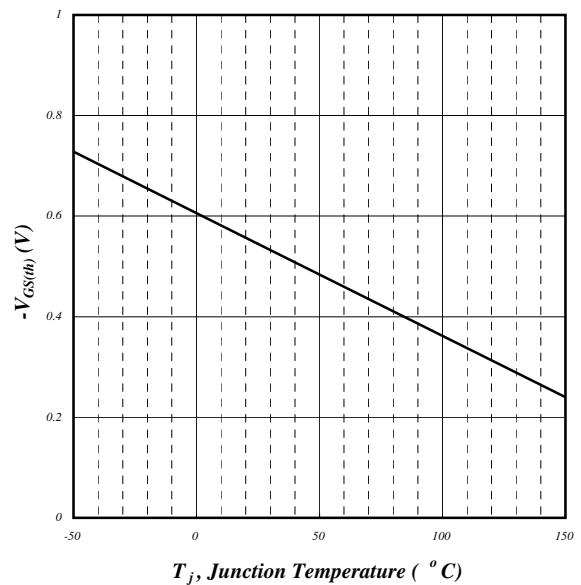


Fig 12. Gate Threshold Voltage v.s. Junction Temperature

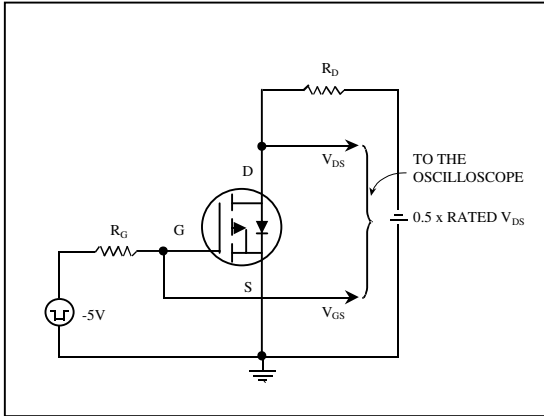


Fig 13. Switching Time Circuit

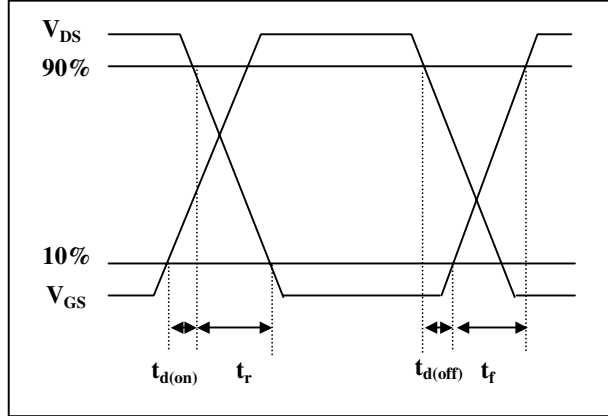


Fig 14. Switching Time Waveform

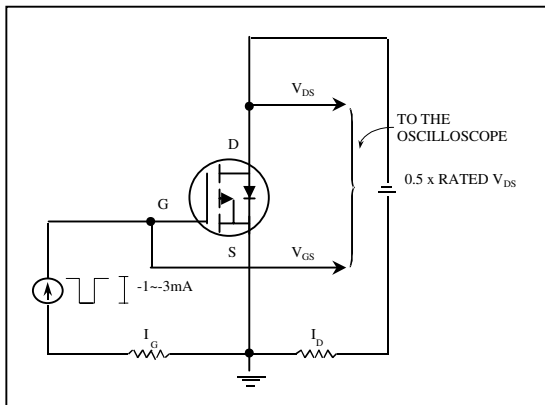


Fig 15. Gate Charge Circuit


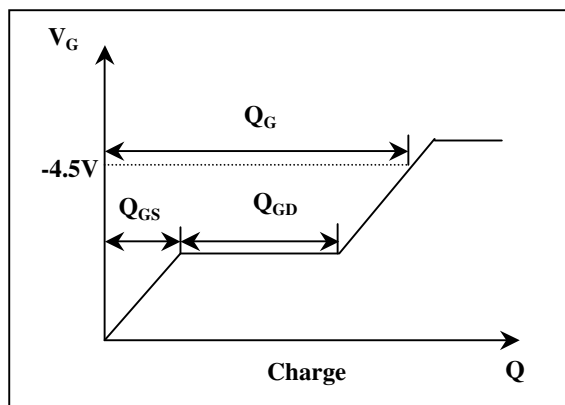





Fig 16. Gate Charge Waveform



Package Outline : SO-8

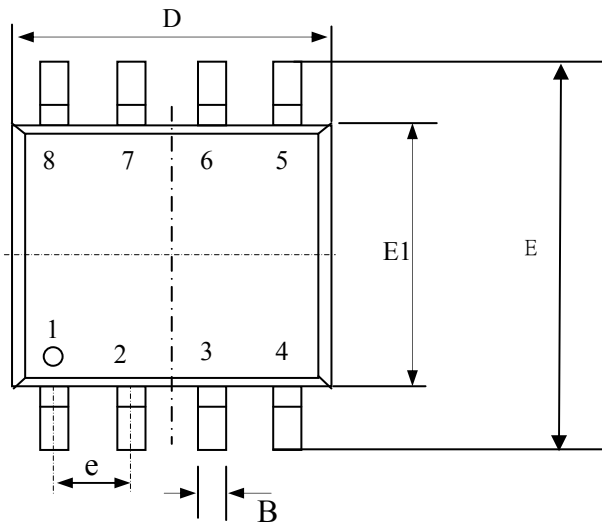


| SYMBOLS | Millimeters | | |
|----------|-------------|------|------|
| | MIN | NOM | MAX |
| A | 1.35 | 1.55 | 1.75 |
| A1 | 0.10 | 0.18 | 0.25 |
| B | 0.33 | 0.41 | 0.51 |
| c | 0.19 | 0.22 | 0.25 |
| D | 4.80 | 4.90 | 5.00 |
| E1 | 3.80 | 3.90 | 4.00 |
| E | 5.80 | 6.15 | 6.50 |
| L | 0.38 | 0.71 | 1.27 |
| θ | 0.00 | 4.00 | 8.00 |
| e | 1.27 TYP | | |

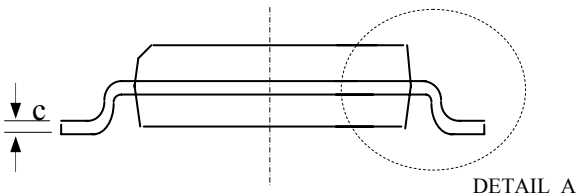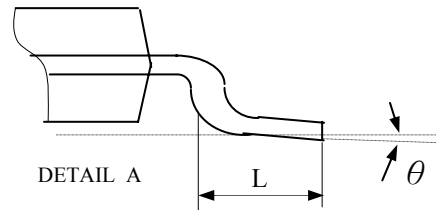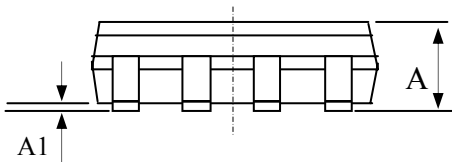

1. All Dimension Are In Millimeters.
2. Dimension Does Not Include Mold Protrusions.

Part Marking Information & Packing : SO-8

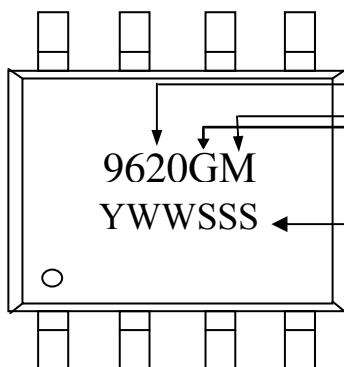

Part Number Package Code

meet Rohs requirement
for low voltage MOSFET only

Date Code (ywwsss)

Y : Last Digit Of The Year

WW : Week

SSS : Sequence

If last "S" is numerical letter : Rohs product

If last "S" is English letter : HF & Rohs