AP9934GM

Pb Free Plating Product

Advanced Power Electronics Corp.

2N AND 2P-CHANNEL ENHANCEMENT MODE POWER MOSFET

- ▼ **Simple Drive Requirement**
- ▼ **Low On-resistance**
- ▼ **Full Bridge Application on LCD Monitor Inverter**



N-CH	BV_{DSS}	35V
	$R_{DS(ON)}$	48mΩ
	I_D	4.3A
P-CH	BV_{DSS}	-35V
	$R_{DS(ON)}$	72mΩ
	I_D	-3.6A

Description

The Advanced Power MOSFETs from APEC provide the designer with the best combination of fast switching, ruggedized device design, low on-resistance and cost-effectiveness.

The SO-8 package is universally preferred for all commercial-industrial surface mount applications and suited for low voltage applications such as DC/DC converters.

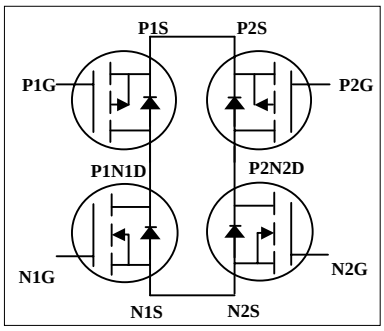

Absolute Maximum Ratings

Symbol	Parameter	Rating		Units
		N-channel	P-channel	
V_{DS}	Drain-Source Voltage	35	-35	V
V_{GS}	Gate-Source Voltage	± 20	± 20	V
I_D@T_A=25℃	Continuous Drain Current[3]	4.3	-3.6	A
I_D@T_A=70℃	Continuous Drain Current[3]	3.4	-2.8	A
I_{DM}	Pulsed Drain Current[1]	20	-20	A
P_D@T_A=25℃	Total Power Dissipation	1.38		W
	Linear Derating Factor	0.01		W/℃
T_{STG}	Storage Temperature Range	-55 to 150		℃
T_J	Operating Junction Temperature Range	-55 to 150		℃

Thermal Data

Symbol	Parameter		Value	Unit
Rthj-a	Thermal Resistance Junction-ambient[3]	Max.	90	℃/W

N-CH Electrical Characteristics@T_j=25°C(unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
BV_{DSS}	Drain-Source Breakdown Voltage	V_{GS}=0V, I_D=250uA	35	-	-	V
$\Delta BV_{DSS}/\Delta T_j$	Breakdown Voltage Temperature Coefficient	Reference to 25℃, I_D=1mA	-	0.03	-	V/℃
$R_{DS(ON)}$	Static Drain-Source On-Resistance[2]	V_{GS}=10V, I_D=4A	-	-	48	mΩ
		V_{GS}=4.5V, I_D=3A	-	-	70	mΩ
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=V_{GS}, I_D=250uA	1	-	3	V
g_{fs}	Forward Transconductance	V_{DS}=10V, I_D=4A	-	8	-	S
I_{DSS}	Drain-Source Leakage Current (T_j=25°C)	V_{DS}=30V, V_{GS}=0V	-	-	1	uA
	Drain-Source Leakage Current (T_j=70°C)	V_{DS}=24V, V_{GS}=0V	-	-	25	uA
I_{GSS}	Gate-Source Leakage	V_{GS}=±20V	-	-	±100	nA
Q_g	Total Gate Charge[2]	I_D=4A	-	6	10	nC
Q_{gs}	Gate-Source Charge	V_{DS}=28V	-	2	-	nC
Q_{gd}	Gate-Drain ("Miller") Charge	V_{GS}=4.5V	-	3	-	nC
$t_{d(on)}$	Turn-on Delay Time[2]	V_{DS}=15V	-	6	-	ns
t_r	Rise Time	I_D=1A	-	5	-	ns
$t_{d(off)}$	Turn-off Delay Time	R_G=3.3Ω,V_{GS}=10V	-	14	-	ns
t_f	Fall Time	R_D=15Ω	-	4	-	ns
C_{iss}	Input Capacitance	V_{GS}=0V	-	490	780	pF
C_{oss}	Output Capacitance	V_{DS}=25V	-	130	-	pF
C_{rss}	Reverse Transfer Capacitance	f=1.0MHz	-	55	-	pF

Source-Drain Diode

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
V_{SD}	Forward On Voltage[2]	I_S=1.2A, V_{GS}=0V	-	-	1.2	V
t_{rr}	Reverse Recovery Time	I_S=4A, V_{GS}=0V	-	18	-	ns
Q_{rr}	Reverse Recovery Charge	dI/dt=100A/μs	-	11	-	nC

P-CH Electrical Characteristics@T_j=25°C(unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
BV_{DSS}	Drain-Source Breakdown Voltage	V_{GS}=0V, I_D=-250uA	-35	-	-	V
$\Delta BV_{DSS}/\Delta T_j$	Breakdown Voltage Temperature Coefficient	Reference to 25℃,I_D=-1mA	-	-0.02	-	V/℃
$R_{DS(ON)}$	Static Drain-Source On-Resistance[2]	V_{GS}=-10V, I_D=-3A	-	-	72	mΩ
		V_{GS}=-4.5V, I_D=-2A	-	-	100	mΩ
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=V_{GS}, I_D=-250uA	-1	-	-3	V
g_{fs}	Forward Transconductance	V_{DS}=-10V, I_D=-3A	-	6	-	S
I_{DSS}	Drain-Source Leakage Current (Tj=25°C)	V_{DS}=-30V, V_{GS}=0V	-	-	-1	uA
	Drain-Source Leakage Current (Tj=70°C)	V_{DS}=-24V, V_{GS}=0V	-	-	-25	uA
I_{GSS}	Gate-Source Leakage	V_{GS}=±20V	-	-	±100	nA
Q_g	Total Gate Charge[2]	I_D=-3A	-	6	10	nC
Q_{gs}	Gate-Source Charge	V_{DS}=-28V	-	1	-	nC
Q_{gd}	Gate-Drain ("Miller") Charge	V_{GS}=-4.5V	-	3	-	nC
$t_{d(on)}$	Turn-on Delay Time[2]	V_{DS}=-15V	-	7	-	ns
t_r	Rise Time	I_D=-1A	-	5	-	ns
$t_{d(off)}$	Turn-off Delay Time	R_G=3.3Ω,V_{GS}=-10V	-	19	-	ns
t_f	Fall Time	R_D=15Ω	-	4	-	ns
C_{iss}	Input Capacitance	V_{GS}=0V	-	420	1100	pF
C_{oss}	Output Capacitance	V_{DS}=-25V	-	140	-	pF
C_{rss}	Reverse Transfer Capacitance	f=1.0MHz	-	65	-	pF

Source-Drain Diode

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
V_{SD}	Forward On Voltage[2]	I_S=-1.2A, V_{GS}=0V	-	-	-1.2	V
t_{rr}	Reverse Recovery Time	I_S=-3A, V_{GS}=0V	-	20	-	ns
Q_{rr}	Reverse Recovery Charge	dI/dt=-100A/μs	-	16	-	nC

Notes:

1.Pulse width limited by Max. junction temperature.

2.Pulse width ≤300us , duty cycle ≤2%.

3.Surface mounted on 1 in^2 copper pad of FR4 board , t ≤10sec ; 186 ℃/W when mounted on Min. copper pad.

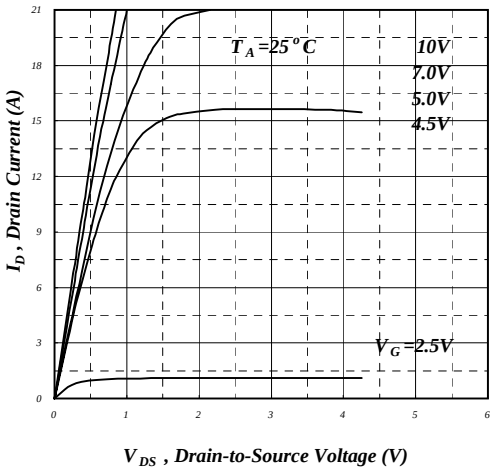

Fig 1. Typical Output Characteristics

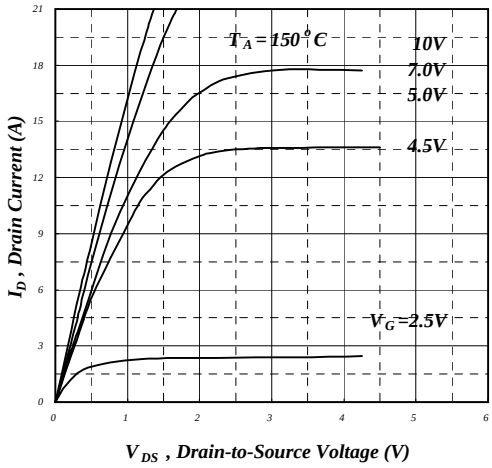

Fig 2. Typical Output Characteristics

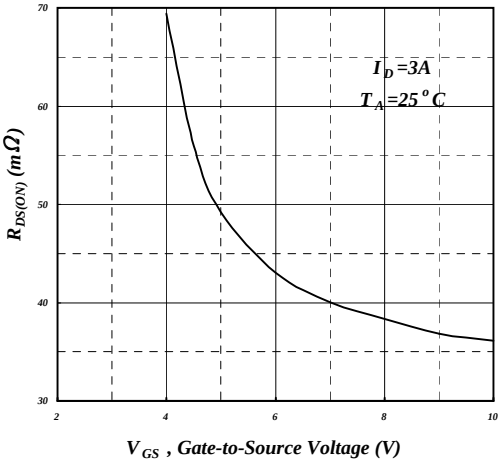

Fig 3. On-Resistance v.s. Gate Voltage

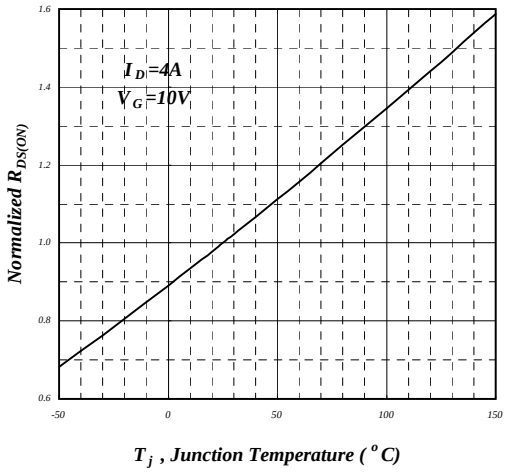

Fig 4. Normalized On-Resistance v.s. Junction Temperature

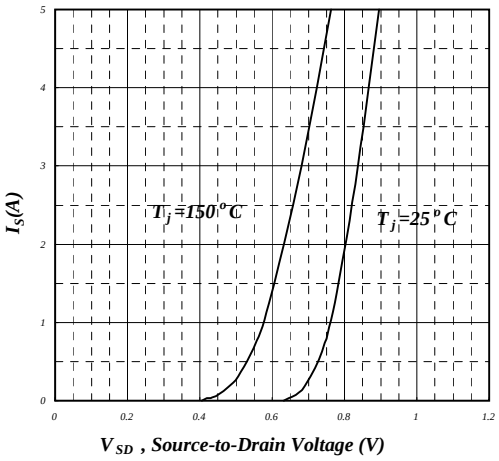

Fig 5. Forward Characteristic of Reverse Diode

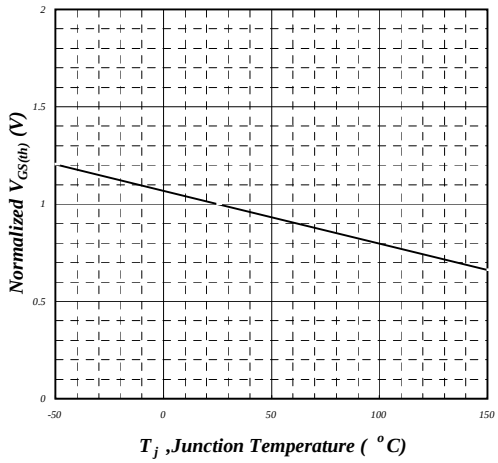

Fig 6. Gate Threshold Voltage v.s. Junction Temperature

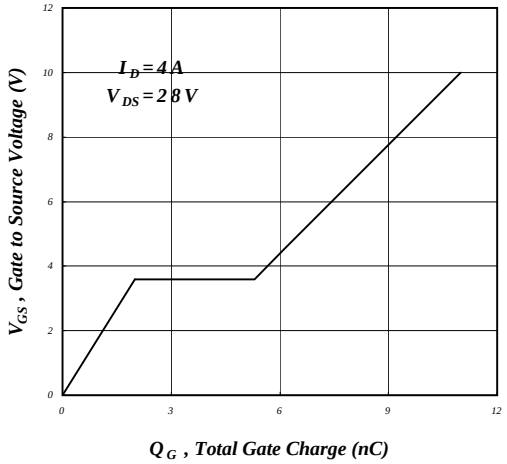

Fig 7. Gate Charge Characteristics

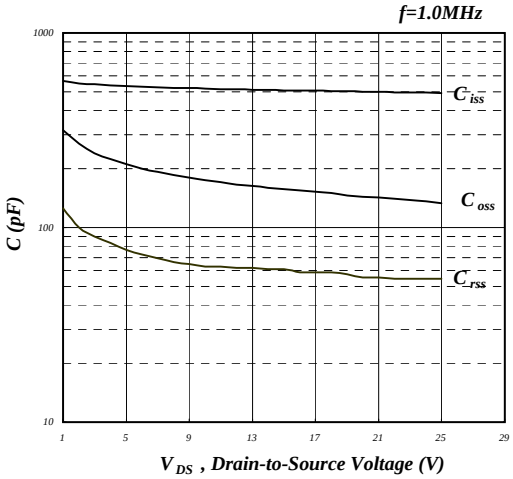

Fig 8. Typical Capacitance Characteristics

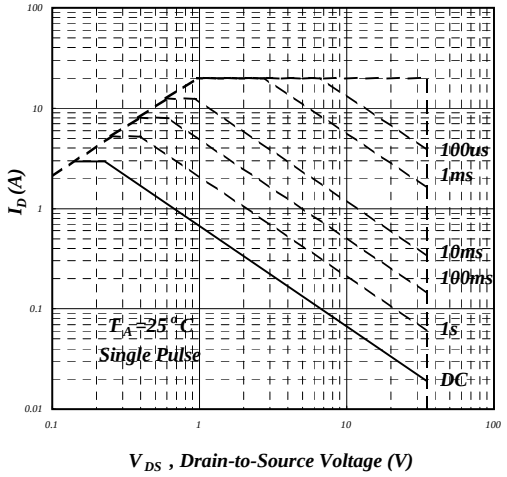

Fig 9. Maximum Safe Operating Area

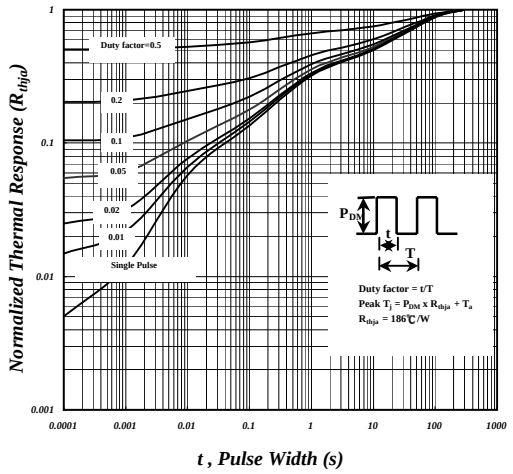

Fig 10. Effective Transient Thermal Impedance

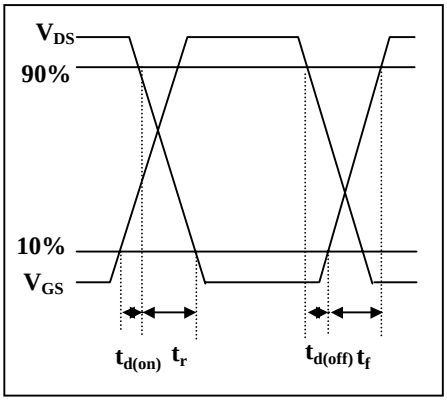

Fig 11. Switching Time Waveform

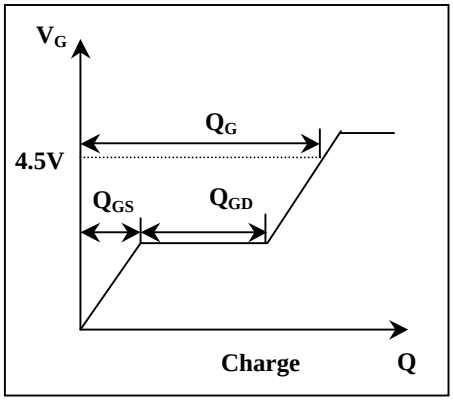

Fig 12. Gate Charge Waveform

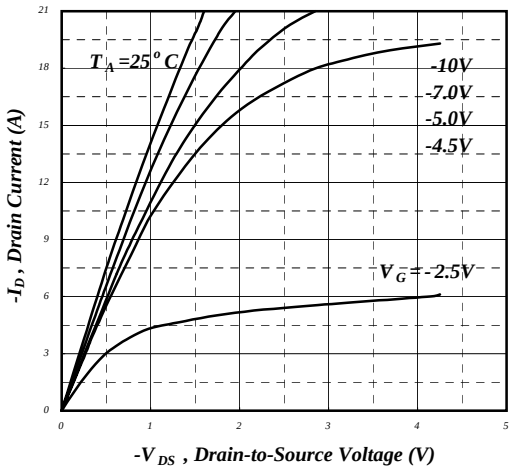

Fig 1. Typical Output Characteristics

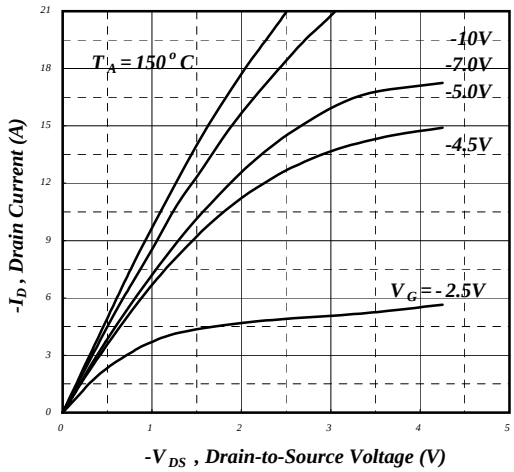

Fig 2. Typical Output Characteristics

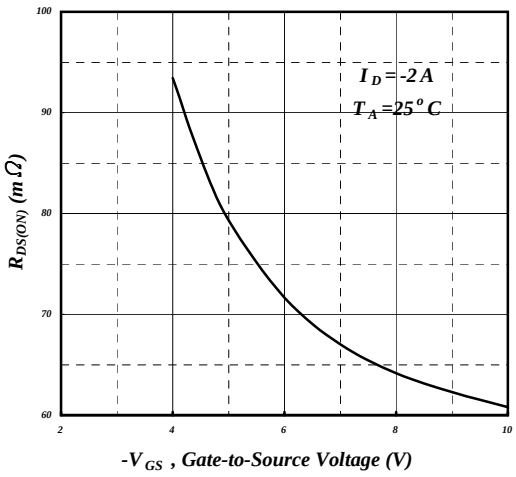

Fig 3. On-Resistance v.s. Gate Voltage

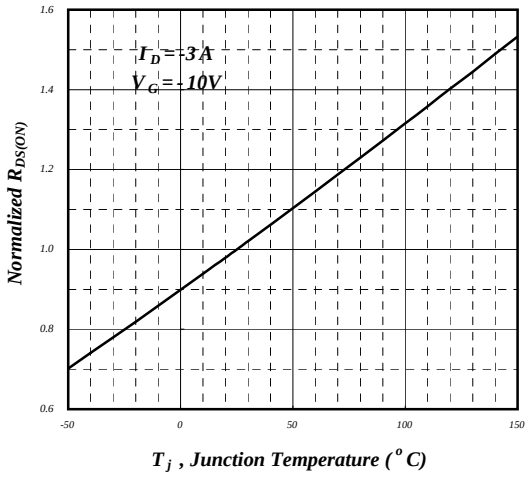

Fig 4. Normalized On-Resistance v.s. Junction Temperature

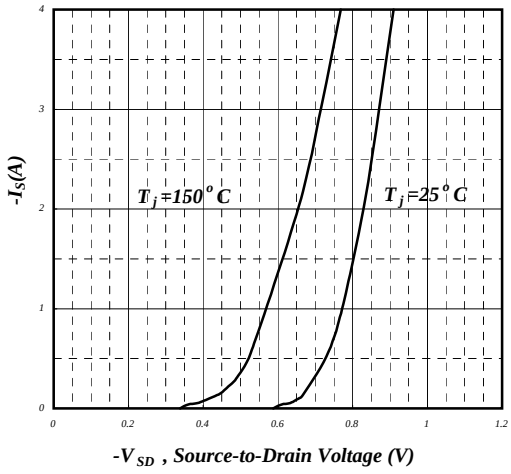

Fig 5. Forward Characteristic of Reverse Diode

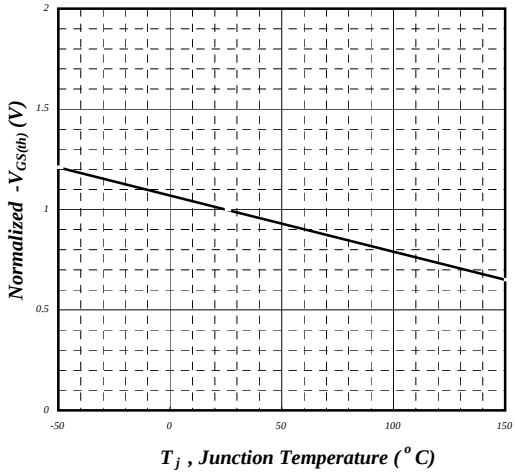

Fig 6. Gate Threshold Voltage v.s. Junction Temperature

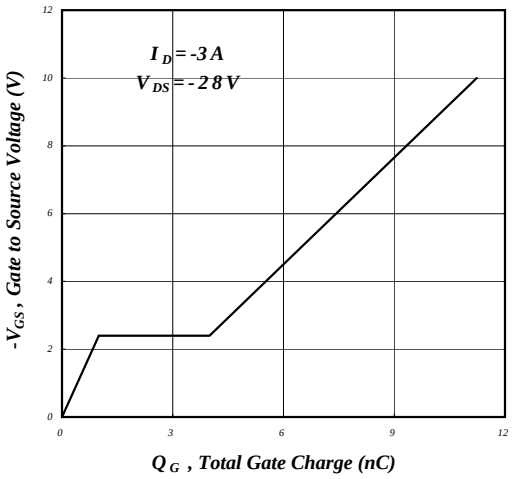

Fig 7. Gate Charge Characteristics

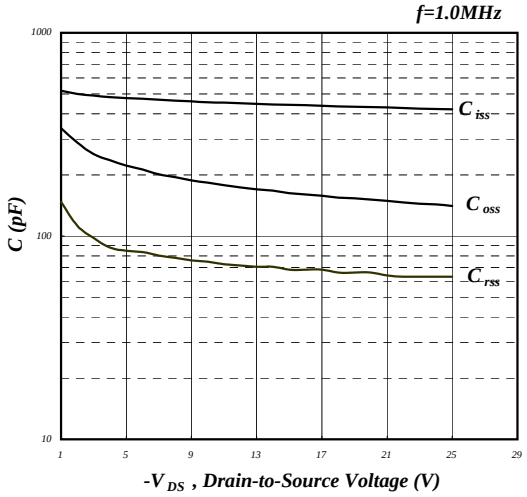

Fig 8. Typical Capacitance Characteristics

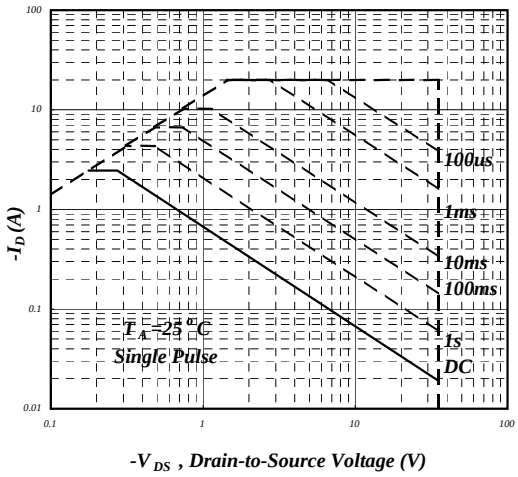

Fig 9. Maximum Safe Operating Area

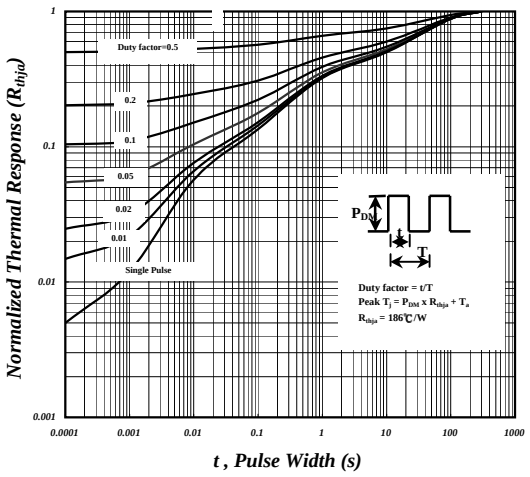

Fig 10. Effective Transient Thermal Impedance

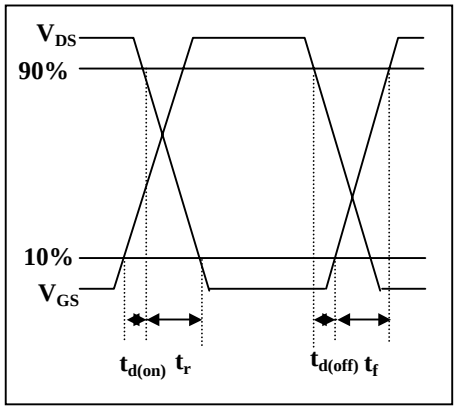

Fig 11. Switching Time Waveform

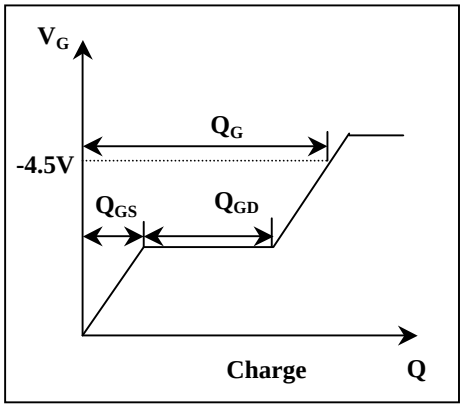

Fig 12. Gate Charge Waveform