




N Plug Solder Clamp for Crystek SS402 Cable

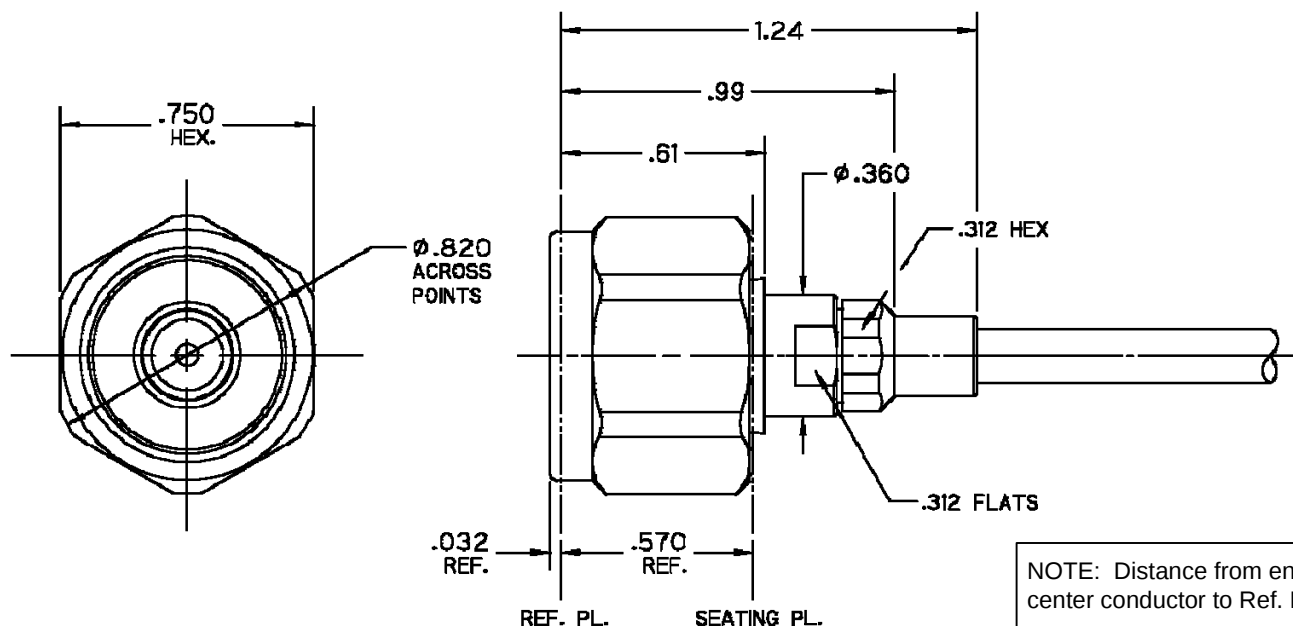

NOTES:

1.0 Materials


- 1.1 Body, Coupling, and Clamp Nut: Steel. Corrosion Resistant per ASTM-A582. UNS No. S30300.
- 1.2 Center Conductor: Beryllium Copper per ASTM-B196. UNS C17300.
- 1.3 Solder Ferrule: Brass per ASTM-B16. UNS C36000.
- 1.4 Gasket and O-Ring: Silicone Rubber per A-A-59588.
- 1.5 Insulator: PTFE Fluorocarbon per ASTM-D1710.
- 1.6 Cable Stop: Polyetherimide Thermoplastic (ULTEM 1000) per ASTM-D5205.

2.0 Finishes


- 2.1 Center Contact and Solder Ferrule: Gold Plate per ASTM-B488 50 Microinches Min. thickness over Electrolytic Nickel Plate per ASTM-B689 50 Microinches Min. thickness.
- 2.2 Body, Coupling, and Clamp Nuts: Passivated per SAE-AMS-2700.
- 2.3 Gasket, O-Ring, and Dielectrics: None.

3.0 Interface: Type N plug per Crystek Interface Specification CC-PNP-TL.






N Plug Solder Clamp for Crystek SS402 Cable

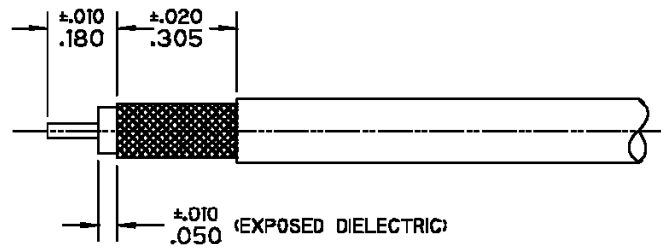


Step 1 1.1 Trim Cable as shown.

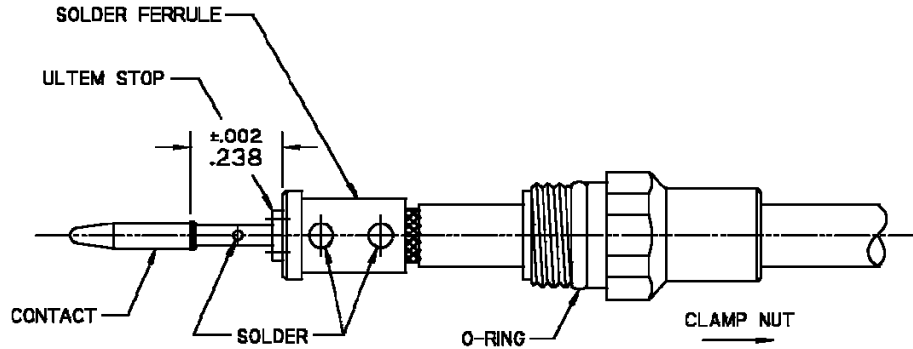

- 2.1 Slide clamp nut over cable as shown.
2.2 Insert cable into solder ferrule until cable dielectric is flush with face of ferrule, then solder both cable braids where indicated.
2.3 Slide dielectric stop over cable center conductor and solder contact flush against stop to dimension shown.

Step 2

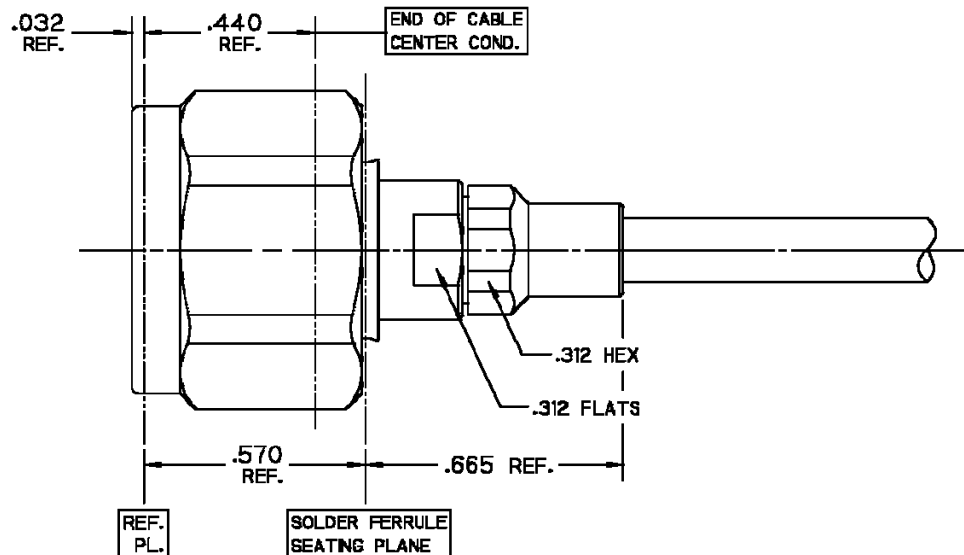

Step 3 3.1 Insert cable/contact sub-assembly into connector until seated and tighten clamp nut to 35-45 in-lbs.

Product Control:

Crystek Part Number:	CS-NM-MCA	Release Date:	24-Feb-11
Revision Level:	A	Responsible:	K. Piotrowicz

Page 2 of 2

