


Coaxial Resonator Oscillator-CRO Frequency Doubling, 2×Fundamental CVCO55CXT-4812-4812





PERFORMANCE SPECIFICATION	MIN	TYP	MAX	UNITS
Lower Frequency:			4812	MHz
Upper Frequency:	4812			MHz
Tuning Voltage:	0.3		4.7	VDC
Supply Voltage:	4.75	5.0	5.25	VDC
Output Power:	+0.5	+3.0	+5.5	dBm
Supply Current:		25	30	mA
Harmonic, F×(0.5):		-30	-20	dBc
Harmonic, F×(1.5):		-35	-25	dBc
Harmonic, F×(2.0):		-30	-20	dBc
Pushing:		1.5	3.0	MHz/V
Pulling, all Phases:		0.5	1.0	MHz pk-pk
Tuning Sensitivity:		10		MHz/V
Phase Noise @ 10kHz offset:		-102	-99	dBc/Hz
Load Impedance:		50		Ω
Input Capacitance:			10	pF
Operating Temperature Range:	-40		+85	°C
Storage Temperature Range:	-45		+90	°C

Phase Noise (1 Hz BW, Typical)

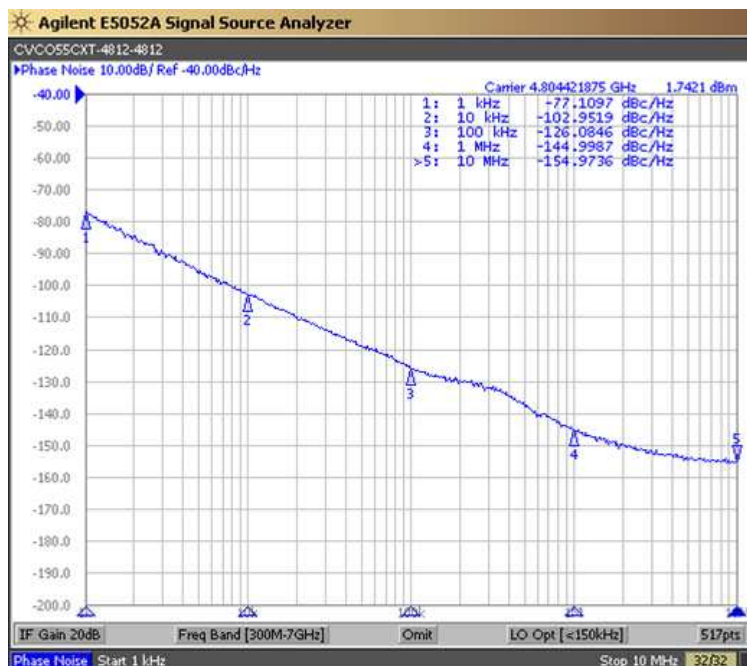





Tuning Curve (Typical)

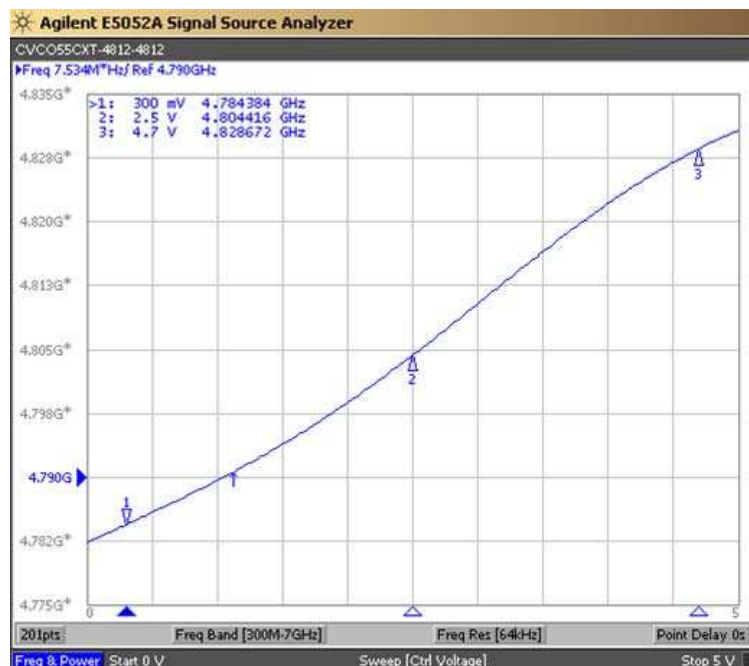



CRYSTEK
MICROWAVE
A DIVISION OF CRYSTEK CORPORATION


Coaxial Resonator Oscillator-CRO Frequency Doubling, 2×Fundamental CVCO55CXT-4812-4812

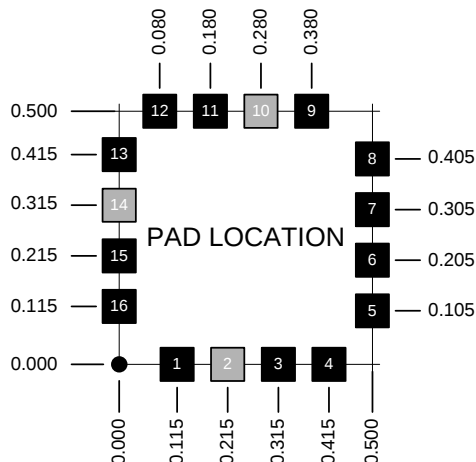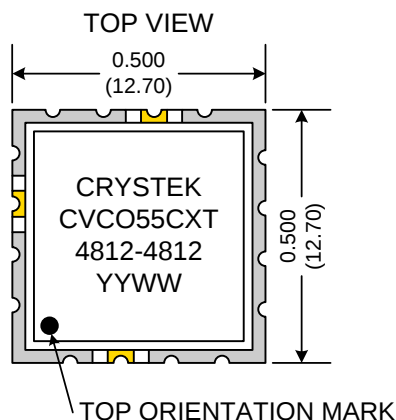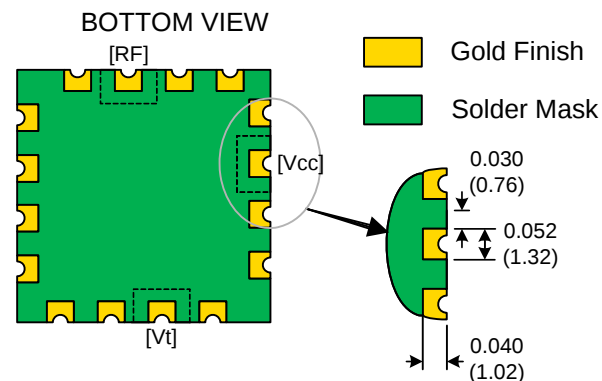

Pad	Connection
2	Vt
10	RF-OUTPUT
14	Vcc
Others	GROUND

- Unless otherwise specified, Dimensions are in: $\frac{IN}{(mm)}$
- Pad Location Dimensions are in: Inches

TAPE AND REEL

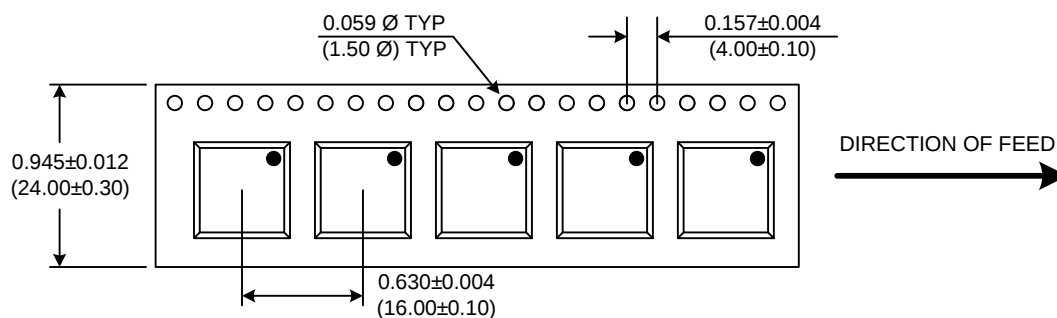

Drawing not to scale

Product Control:

Crystek Part Number:	CVCO55CXT-4812-4812	Release Date:	04-Jan-12
Revision Level:	B	Responsible:	C. Vales

Specification is subject to change without notice

Page 2 of 2



CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FLORIDA 33913
PHONE: 239-561-3311 • 800-237-3061
FAX: 239-561-1025 • WWW.CRYSTEK.COM