



PERFORMANCE SPECIFICATION	MIN	TYP	MAX	UNITS
Lower Frequency:			148	MHz
Upper Frequency:	219			MHz
Tuning Voltage:	0.2		4.8	VDC
Supply Voltage:	4.75	5.0	5.25	VDC
Output Power:	0	+2.0	+4.0	dBm
Supply Current:			5	mA
Harmonic Suppression (2 nd Harmonic):		-15		dBc
Pushing:		0.3	0.5	MHz/V
Pulling, all Phases:		0.3	0.5	MHz pk-pk
Tuning Sensitivity:			25	MHz/V
Phase Noise @ 10kHz offset:		-120	-114	dBc/Hz
Modulation Sensitivity:		-25		kHz/V
Modulation Port Input Capacitance:		330		pF
Load Impedance:		50		Ω
Input Capacitance:			330	pF
Operating Temperature Range:	-30		+75	$^{\circ}\text{C}$
Storage Temperature Range:	-40		+85	$^{\circ}\text{C}$

Phase Noise (1 Hz BW, Typical)

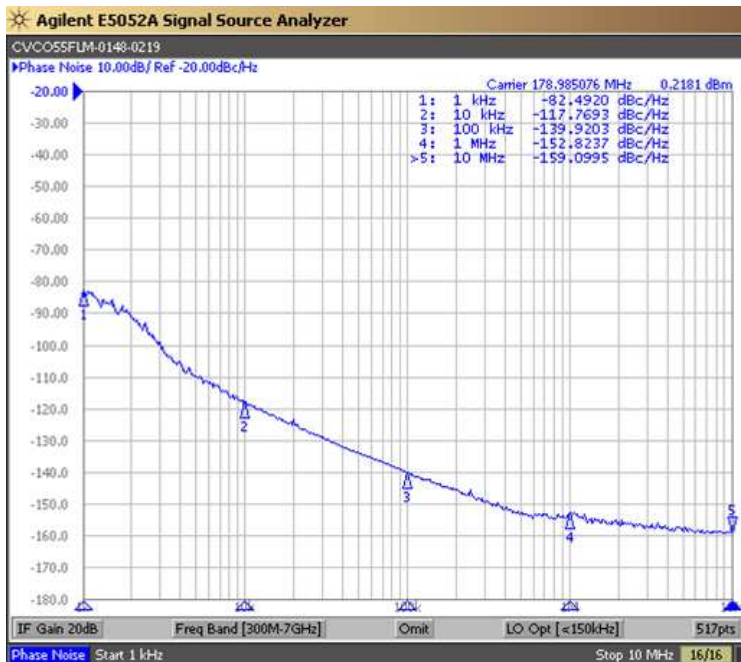

Tuning Curve (Typical)

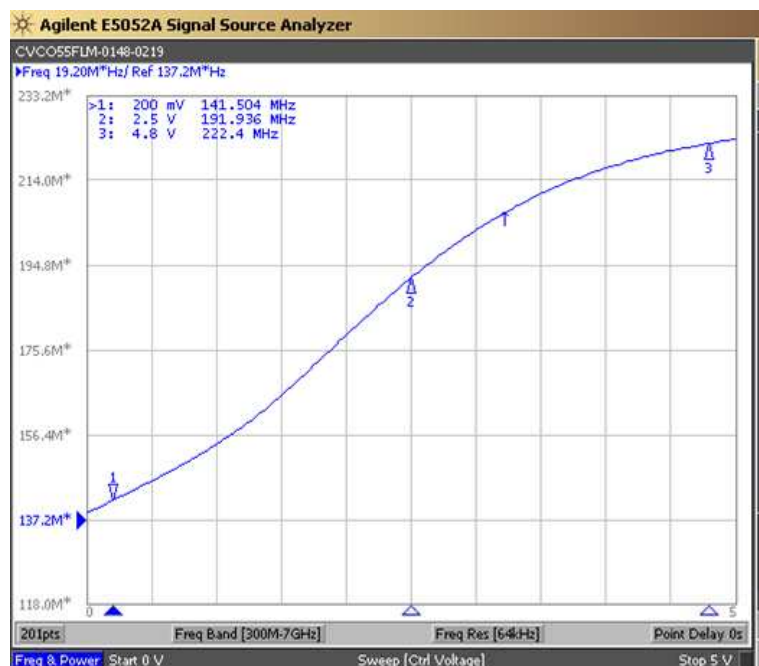





CRYSTEK
MICROWAVE
A DIVISION OF CRYSTEK CORPORATION

Voltage Controlled Oscillator-VCO

CVCO55FLM-0148-0219

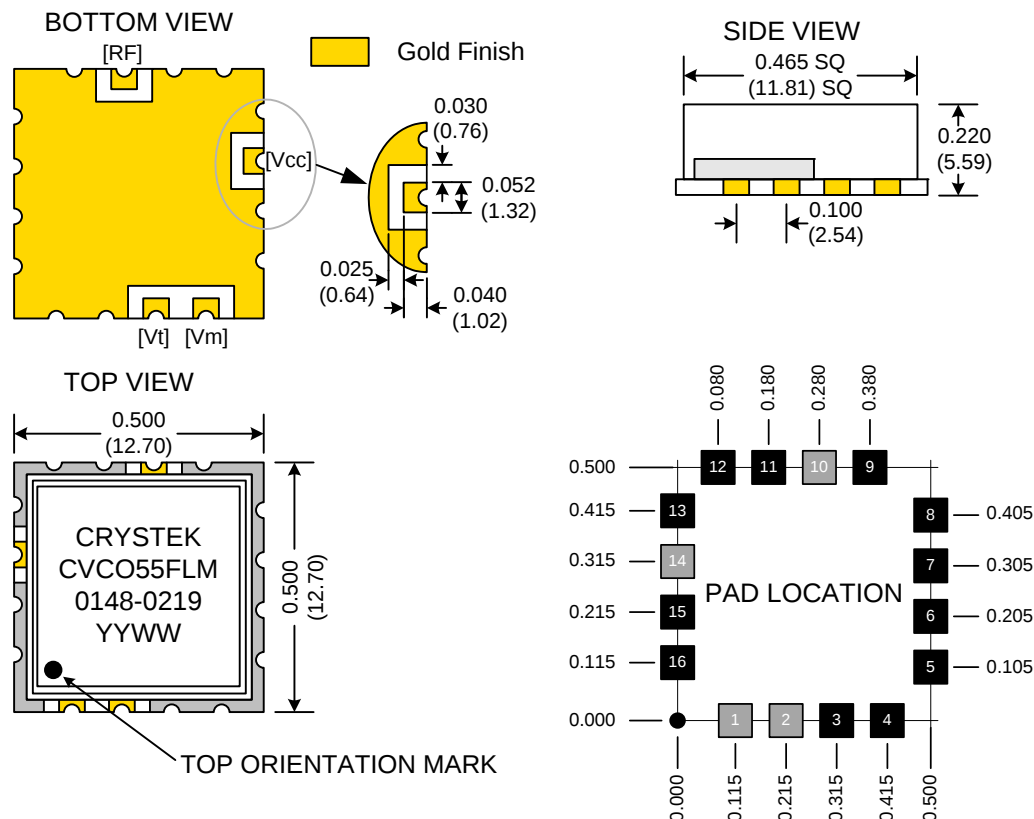

TAPE AND REEL

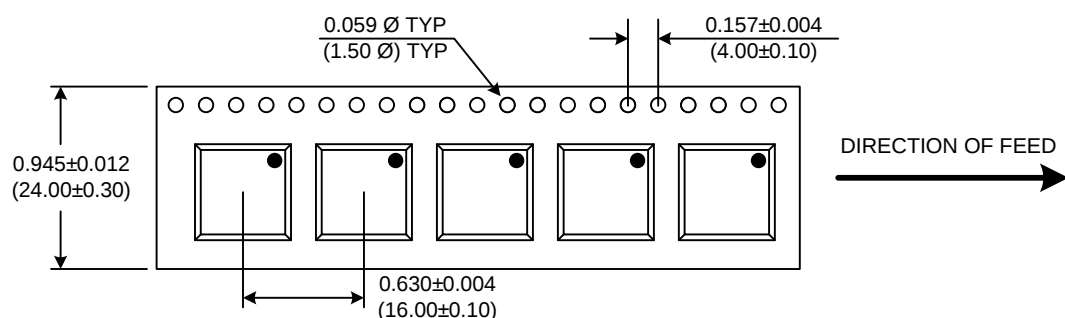

Product Control:

Crystek Part Number:	CVCO55FLM-0148-0219	Release Date:	03-Aug-11
Revision Level:	B	Responsible:	C. Vales

Specification is subject to change without notice

Page 2 of 2



CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FLORIDA 33913
PHONE: 239-561-3311 • 800-237-3061
FAX: 239-561-1025 • WWW.CRYSTEK.COM