

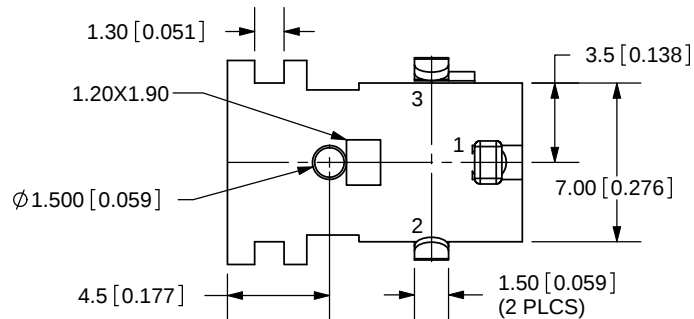
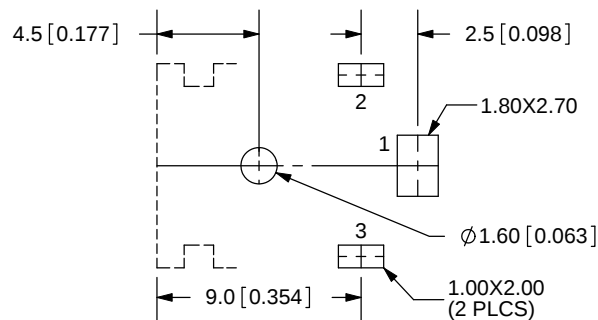


REV.	DESCRIPTION	DATE
A	NEW DRAWING	4/17/2006
B	appearance update to pin 2	11/29/2010

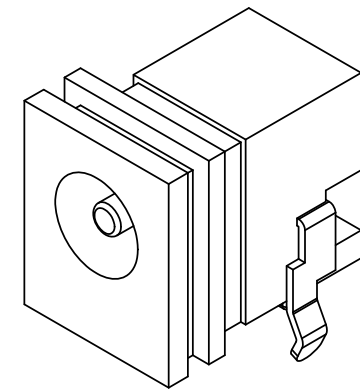

TOLERANCE:
X.X ±0.2mm
X.XX ±0.1mm
X.XXX ±0.05mm

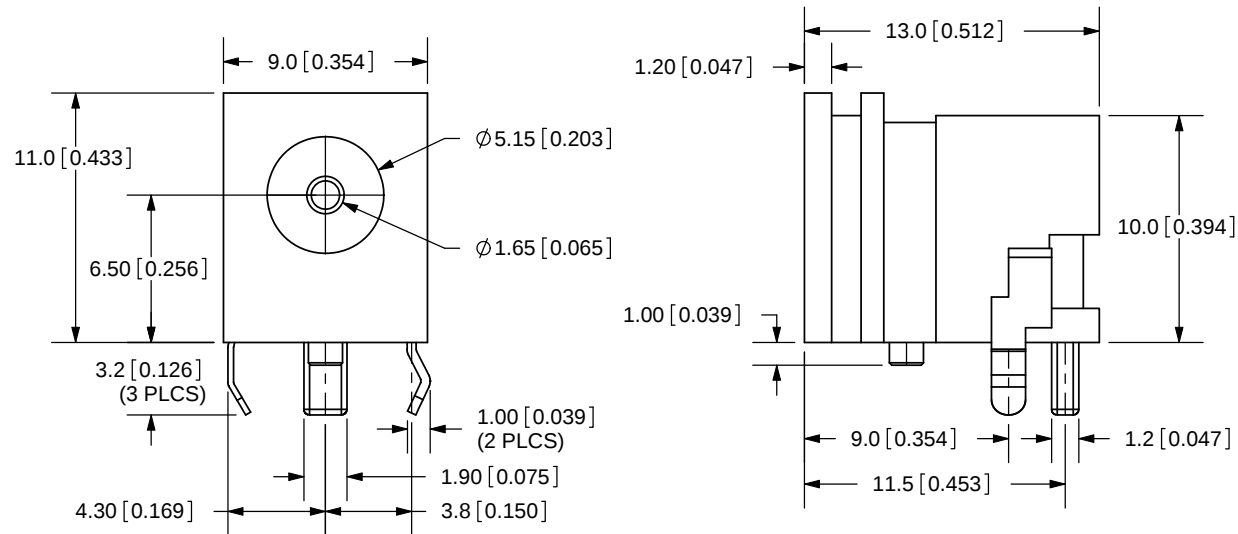

MODEL NO.	PJ1-021
SCHEMATIC	

CENTER PIN DIAMETER 1.65mm Dia.

SPECIFICATIONS:

RATING: 16V DC @ 5A
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 50M OHMS MIN: 500V DC
VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
LIFE: 5,000 CYCLES

	MATERIAL	PLATING
CENTER PIN	Copper	Nickel
TERMINAL 1	Brass	Silver
TERMINAL 2	Copper Alloy	Silver
TERMINAL 3	Brass	Silver
HOUSING	PBT	



CUI INC

20050 SW 112th Ave.
Tualatin, OR 97062
Phone: 503-612-2300
800-275-4899
Fax: 503-612-2383
Website: www.cui.com

TITLE: 1.65mm DC POWER JACK, PCB MOUNT	REV: B
PART NO. PJ1-021	UNITS: MM [INCHES]
DRAWN BY: ZRJ	APPROVED BY:
	SCALE: 3:1

PC FILE NAME:
PJ1-021

COPYRIGHT 2010 BY CUI INC.