


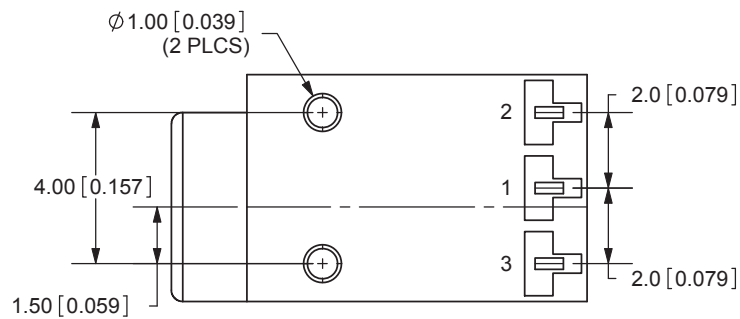
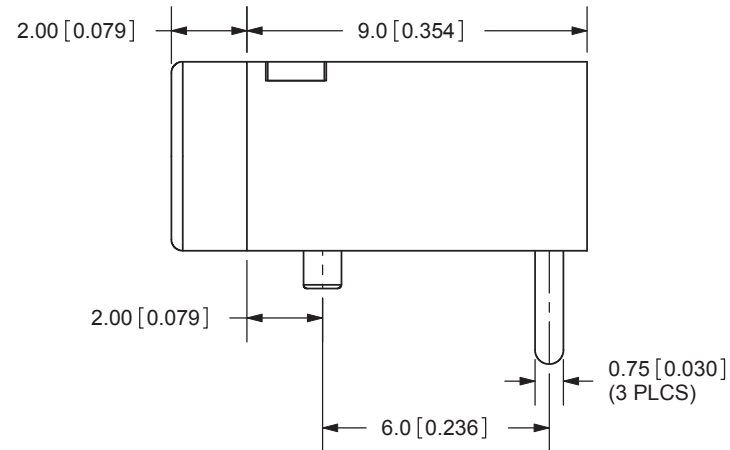


REV.	DESCRIPTION	DATE
A	NEW DRAWING	7/30/2007
B	added pin dimension	6/11/2008

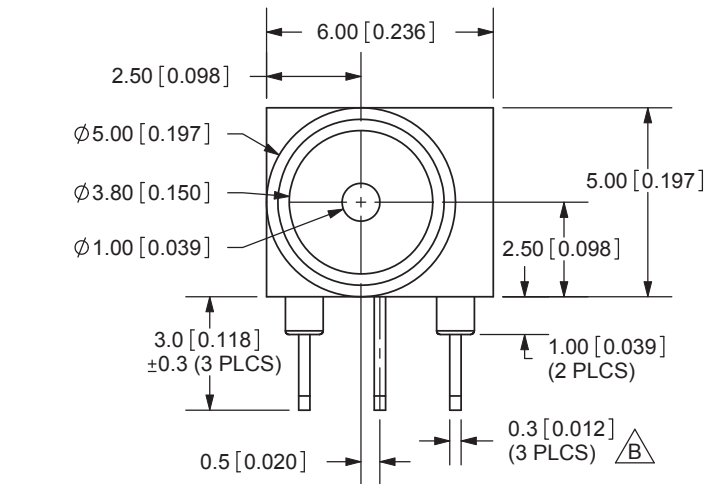

SCALE: 3:1

TOLERANCE:
X.X±0.2mm
X.XX±0.1mm
X.XXX±0.05mm

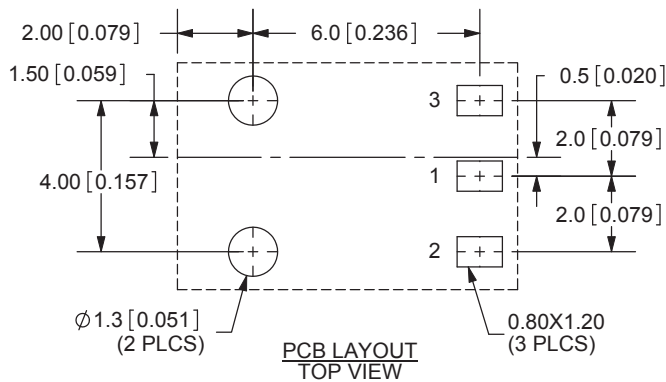

MODEL NO.	PJ-040C
SCHEMATIC	

CENTER PIN DIAMETER 1.0mm Dia.

SPECIFICATIONS:
RATING: 16V DC @ 2A
CONTACT RESISTANCE: 50m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN: 500V DC
VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
LIFE: 5,000 CYCLES
OPERATING TEMP: -25° ~ +85°C

	MATERIAL	PLATING
CENTER PIN	Brass	Tin
TERMINAL 1	Brass	Tin
TERMINAL 2	Copper Alloy	Tin
TERMINAL 3	Brass	Tin
BODY	PA66	

		20050 SW 112th Ave. Tualatin, OR 97062 Phone: 503-612-2300 800-275-4899 Fax: 503-612-2383 Website: www.cui.com	
TITLE: DC POWER JACK		REV: B	
PART NO. PJ-040C		UNITS: MM [INCHES]	
DRAWN BY: ZRJ		APPROVED BY:	
		SCALE: 5:1	

PC FILE NAME:
PJ-040C

COPYRIGHT 2008 BY CUI INC.