
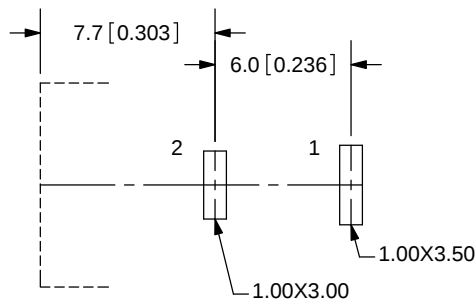





REV.	DESCRIPTION	DATE
A	NEW DRAWING	7/30/2007
B	cut away area modified	8/28/2008
C	added dimensions	6/24/2011

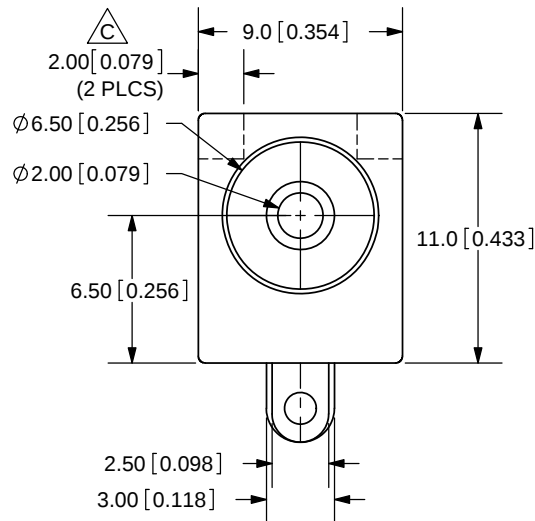

PCB LAYOUT
TOP VIEW

MODEL NO.	PJ-037AH
SCHEMATIC	

CENTER PIN DIAMETER 2.00mm Dia.

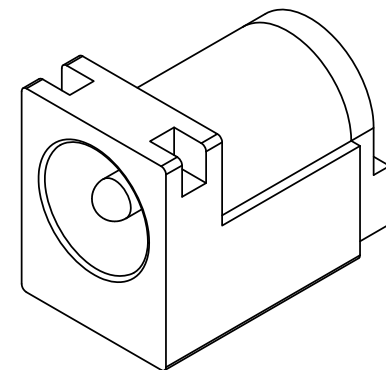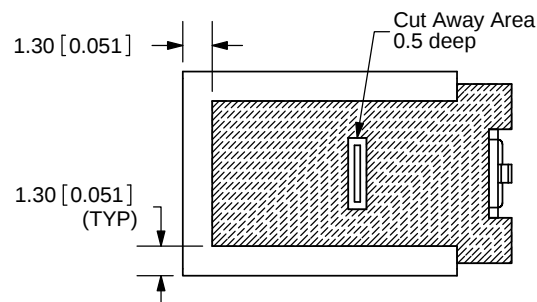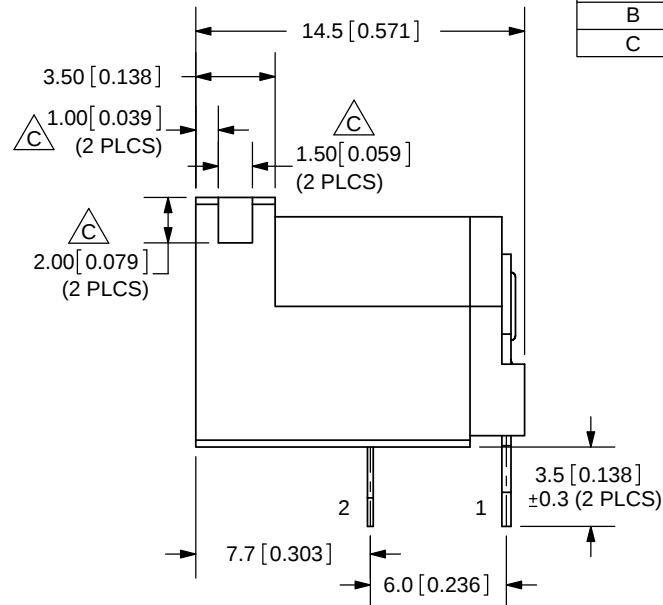

TOLERANCE:
X.X±0.2mm
X.XX±0.1mm
X.XXX±0.05mm



SPECIFICATIONS:
RATING: 16V DC@ 5A
CONTACT RESISTANCE: 50m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN: 500V DC
VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
LIFE: 5,000 CYCLES

	MATERIAL	PLATING	TITLE: DC POWER JACK		REV: C
CENTER PIN	Copper	Nickel	PART NO. PJ-037AH		UNITS: MM [INCHES]
TERMINAL 1	Brass	Silver			
TERMINAL 2	Copper Alloy	Silver	DRAWN BY: ZRJ		APPROVED BY:
BODY	PBT				
			SCALE: 3:1		



CUI INC

20050 SW 112th Ave.
Tualatin, OR 97062
Phone: 503-612-2300
800-275-4899
Fax: 503-612-2383
Website: www.cui.com

PC FILE NAME:
PJ-037AH

COPYRIGHT 2011 BY CUI INC.