


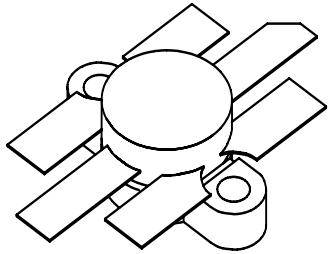

UMIL 60

60 Watts, 28 Volts, Class AB
Defcom 225 - 400 MHz

<p>GENERAL DESCRIPTION The UMIL60 is a double input matched COMMON EMITTER broadband transistor specifically intended for use in the 225-400 MHz frequency band. It may be operated in Class AB or C. Gold metallization and silicon diffused resistors ensure ruggedness and high reliability.</p>	<p style="text-align: center;">CASE OUTLINE 55HW, Style 2</p> 												
<p>ABSOLUTE MAXIMUM RATINGS Maximum Power Dissipation @ 25°C 140 Watts</p> <p>Maximum Voltage and Current</p> <table border="0"> <tr> <td>BVces</td> <td>Collector to Emitter Voltage</td> <td>60 Volts</td> </tr> <tr> <td>BVebo</td> <td>Emitter to Base Voltage</td> <td>4.0 Volts</td> </tr> <tr> <td>Ic</td> <td>Collector Current</td> <td>8.0 A</td> </tr> </table> <p>Maximum Temperatures</p> <table border="0"> <tr> <td>Storage Temperature</td> <td>- 65 to +150°C</td> </tr> <tr> <td>Operating Junction Temperature</td> <td>+150°C</td> </tr> </table>		BVces	Collector to Emitter Voltage	60 Volts	BVebo	Emitter to Base Voltage	4.0 Volts	Ic	Collector Current	8.0 A	Storage Temperature	- 65 to +150°C	Operating Junction Temperature
BVces	Collector to Emitter Voltage	60 Volts											
BVebo	Emitter to Base Voltage	4.0 Volts											
Ic	Collector Current	8.0 A											
Storage Temperature	- 65 to +150°C												
Operating Junction Temperature	+150°C												

ELECTRICAL CHARACTERISTICS @ 25 °C


SYMBOL	CHARACTERISTICS	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Pout	Power Output	F = 400 MHz	60			Watts
Pin	Power Input	Vcc = 28 Volts			8	Watts
Pg	Power Gain		8.8	9.0		dB
η_c	Efficiency			60		%
VSWR	Load Mismatch Tolerance				5:1	

BVebo	Emitter to Base Breakdown	Ie = 5 mA	4.0			Volts
BVces	Collector to Emitter Breakdown	Ic = 50 mA	60			Volts
BVceo	Collector to Emitter Breakdown	Ie = 50 mA	33			Volts
Cob	Output Capacitance	Vcb = 28 V, F = 1 MHz			75	pF
hFE	DC - Current Gain	Vce = 5 V, Ic = 2 A	10			
θ_{jc}	Thermal Resistance				.65	°C/W

Rev A January 2009


Microsemi reserves the right to change, without notice, the specifications and information contained herein.
Visit our web site at www.microsemi.com or contact our factory direct.

MIL60

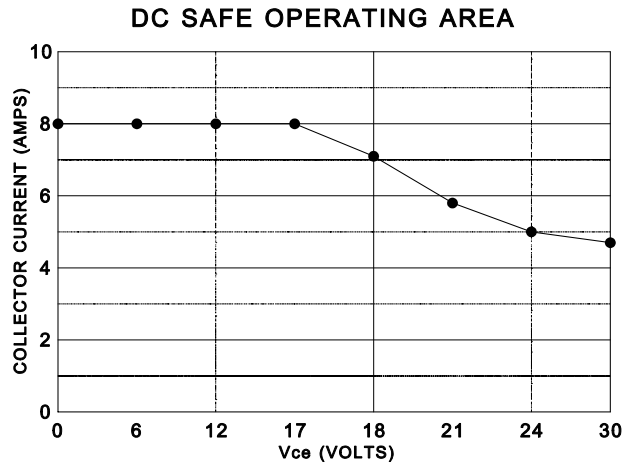

POWER OUTPUT vs POWER INPUT

V_{cc}= 28V f=400MHz

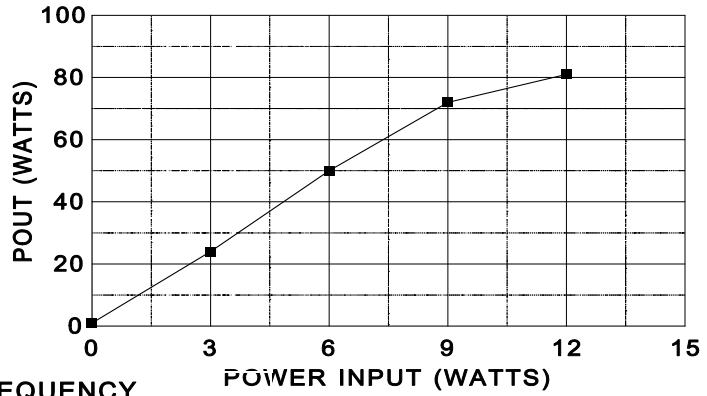

POWER GAIN VS FREQUENCY

