

DESCRIPTION

The GC1700 series varactors are silicon abrupt junction devices. They offer the highest Q and lowest series resistance available in a 60 Volt silicon varactor.

This series of diodes meets RoHS requirements per EU Directive 2002/95/EC. The standard terminal finish is gold unless otherwise specified. Consult the factory if you have special requirements.

APPLICATIONS

The GC1700 series varactors are used for moderate bandwidth tuning. They are available in values appropriate for VHF through KU band frequencies. These devices are best used in low phase noise voltage controlled oscillators, low loss voltage variable filters and phase shifters. Additionally, due to their higher V_B , they offer superior, low IMD performance over lower voltage types.

Standard capacitance tolerance is $\pm 10\%$. Other capacitance values and custom mechanical configurations are also available. All specifications shown are based on style 30 package and include 0.18 pF case capacitance. Consult package outline section of this catalog for other case styles available. Complete electrical and mechanical data are also provided.

**ABSOLUTE MAXIMUM RATINGS AT 25° C
(UNLESS OTHERWISE SPECIFIED)**

Rating	Symbol	Value	Unit
Minimum Breakdown Voltage @10 uA	V_B	60	V
Maximum Leakage Current @55 Volts	I_R	0.02 @ 25 °C 2.0 @125 °C	uA
Operating Temperature	T_{OP}	-55 to +125	°C
Storage Temperature	T_{STG}	-65 to +150	°C
Thermal Coefficient of Capacitance @4 Volts	T_{CC}	300	ppm/ °C

IMPORTANT:

For the most current data, consult MICROSEMI's website: www.MICROSEMI.com
 Specifications are subject to change, consult the factory for further information.



These devices are ESD sensitive and must be handled use using ESD precautions.

KEY FEATURES

- Highest Q for 60 Volt Varactors
- Lowest R_s
- Large selection of capacitance values to chose from
- Low phase noise
- RoHS Compliant¹

¹ Most of our devices are supplied with Gold plated terminations. Other terminal finishes are available on request. Consult factory for details.

APPLICATIONS/BENEFITS

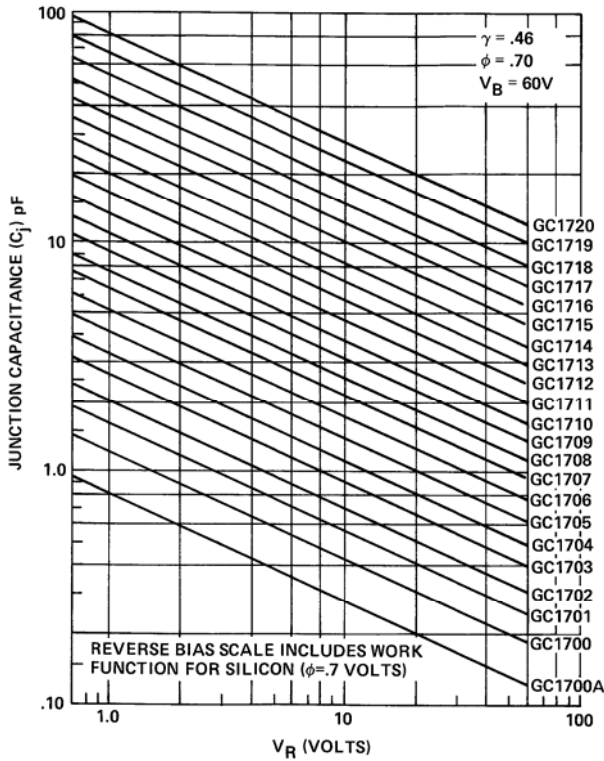
- VHF to Ku Band Tuning
- VVF (Voltage Variable Filters)
- Phase Shifters

ELECTRICAL CHARACTERISTICS @ 25° C

Model Number	C _{T-4} + / - 10%	Quality Factor ³ (Min)	Capacitance Ratio ² (Min)
	(Note 2) @ -4V (pF)	@-4V, 50 MHz	C _{T0} / C _{T-60}
GC1700A – 00	0.6	2200	4.5
GC1700	0.8	2100	4.6
GC1701	1.0	2000	4.8
GC1702	1.2	1800	5.0
GC1703	1.5	1800	5.3
GC1704	1.8	1700	5.5
GC1705	2.2	1700	5.8
GC1706	2.7	1600	5.9
GC1707	3.3	1600	6.0
GC1708	3.9	1400	6.0
GC1709	4.7	1400	6.5
GC1710	5.6	1400	6.5
GC1711	6.8	1300	6.5
GC1712	8.2	1300	7.0
GC1713	10.0	1200	7.0
GC1714	12.0	1200	7.0
GC1715	15.0	1100	7.0
GC1716	18.0	1000	7.0
GC1717	22.0	1000	7.0
GC1718	27.0	900	7.0
GC1719	33.0	800	7.0
GC1720	39.0	800	7.0

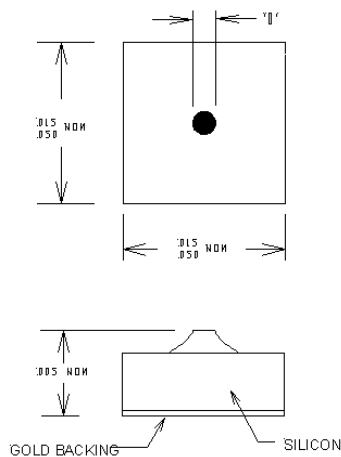
Notes

- 1) When ordering, specify the desired case style suffix to the model. (eg. GC1701 – 30)
- 2) Capacitance values include a package capacitance of 0.18 pF. Capacitance is measured at F = 1 MHz.
- 3) Q is calculated from:
 - a. $Q = 1 / 2\pi f R_s C_j$
 - b. R_s is measured using @ 1 GHz using transmission loss techniques.
 - c. Capacitance is measured at 1 MHz.

TYPICAL CJ VS REVERSE BIAS
NOTES


Typical Junction Capacitance vs Reverse Bias

- CHIP DIMENSIONS VARY BY PRODUCT
- OTHER PACKAGE STYLES AVAILABLE ON REQUEST
- CONSULT FACTORY FOR DETAILS

STYLE 00
STYLE 30


- NOTES:
1. TOP CONTACT, CHIP SIZE, AND CHIP THICKNESS DEPENDS ON DIODE PARAMETERS. CONSULT FACTORY.
 2. TOP AND BOTTOM CONTACTS GOLD.

