


Ultra Fast Recovery Rectifiers

UFR10260 — UFR10280

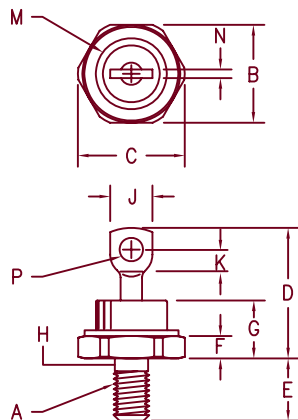

Notes:

1. Full threads within 2 1/2 threads
2. Standard Polarity: Stud is Cathode
Reverse Polarity: Stud is Anode

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A		1/4-28 UNF 3A			1
B	.667	.687	16.94	17.45	
C	---	.793	---	20.14	
D	---	1.00	---	25.40	
E	.422	.453	10.72	11.51	
F	.115	.200	2.92	5.08	
G	---	.450	---	11.43	
H	.220	.249	5.59	6.32	2
J	.250	.375	6.35	9.52	
K	.140	---	3.56	---	
M	---	.667	---	16.94	Dia
N	---	.080	---	2.03	
P	.140	.175	3.56	4.44	Dia

D0203AB (D05)

Microsemi Catalog Number	Working Peak Reverse Voltage	Peak Reverse Voltage
UFR10260*	600V	600V
UFR10270*	700V	700V
UFR10280*	800V	800V

*Add Suffix R For Reverse Polarity

- Ultra Fast Recovery Rectifier
- 175°C Junction Temperature
- 100 Amps current rating
- V_{RRM} 600 to 800 Volts
- t_{RR} 120 nsec maximum

Electrical Characteristics

Average forward current	$I_{F(AV)}$ 100 Amps	$T_C = 134^\circ\text{C}$, Square wave, $R_{\theta JC} = 0.45 \text{ C/W}$ 8.3 ms, half sine, $T_J = 175^\circ\text{C}$
Maximum surge current	I_{FSM} 1300 Amps	
Max peak forward voltage	V_{FM} 1.35 Volts	$I_{FM} = 100\text{A}$; $T_J = 25^\circ\text{C}$
Max reverse recovery time	t_{RR} 120 nS	$I_F = 1\text{A}$, $V_R = 30\text{V}$, $di/dt = -50\text{A}/\mu\text{S}$
Max peak reverse current	I_{RM} 5 mA	V_{RRM} , $T_J = 125^\circ\text{C}$
Max peak reverse current	I_{RM} 25 μA	V_{RRM} , $T_J = 25^\circ\text{C}$
Typical Junction Capacitance	C_J 210 pF	$V_R = 10\text{V}$, $f = 1\text{Mhz}$, $T_J = 25^\circ\text{C}$

*Pulse test: Pulse width 300 μsec , Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	T_{STG}	-65°C to 175°C
Operating junction temp range	T_J	-65°C to 175°C
Max thermal resistance	$R_{\theta JC}$	0.45 C/W Junction to case
Typical thermal resistance (greased)	$R_{\theta CS}$	0.5°C/W Case to sink
Mounting torque		25-30 inch pounds
Weight		.52 ounces (14.7 grams) typical



6 Lake Street
Lawrence, MA 01841
PH: (978) 620-2600
FAX: (978) 689-0803
www.microsemi.com

05-08-07 Rev. 1

UFR10260 — UFR10280

Figure 1
Typical Forward Characteristics

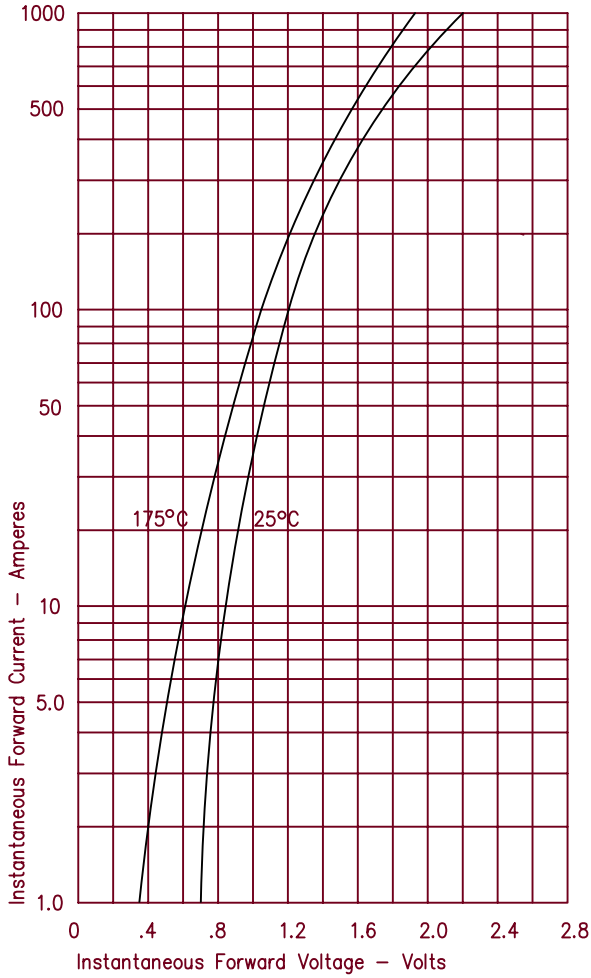


Figure 3
Typical Junction Capacitance

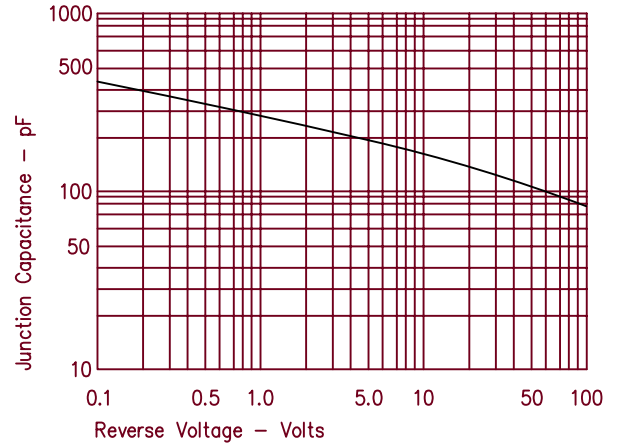


Figure 4
Forward Current Derating

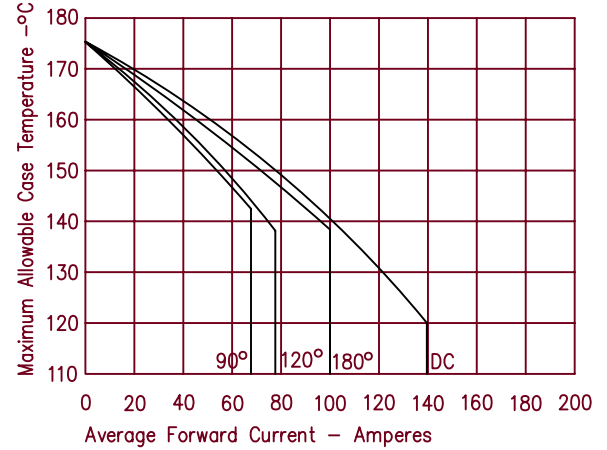


Figure 2
Typical Reverse Characteristics

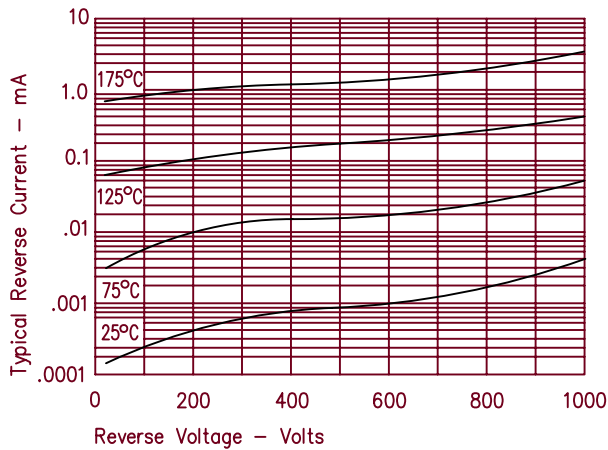


Figure 5
Maximum Forward Power Dissipation

