


High precision analog sensors

IPRM 12I9505/S14

dimension drawing



general data

mounting type	quasi shielded
measuring speed	< 1 mm / ms
measuring distance Sd	0 ... 2 mm
resolution (RMS)	< 0,012 μm (stat. 10 Hz) < 0,065 μm (dynam. 520 Hz) < 0,006 μm (range center)
linearity error	$\pm 60 \mu\text{m}$
repeat accuracy (Sd)	< 1 μm
temperature drift	$\pm 10 \mu\text{m}$

electrical data

voltage supply range +Vs	15 ... 30 VDC
current consumption max. (no load)	50 mA
output circuit	current output
output signal	0 ... 20 mA
load resistance +Vs min.	< 100 Ohm
load resistance +Vs max.	< 400 Ohm
voltage drop Vd	< 7 VDC
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	cylindrical threaded
dimension	12 mm
housing length	90 mm
housing material	steel (9 SMn (Pb) 28/36)
material (sensing face)	ceramic
connection types	connector M12


ambient conditions

operating temperature	0 ... +60 °C
protection class	IP 67


photo



connection diagram

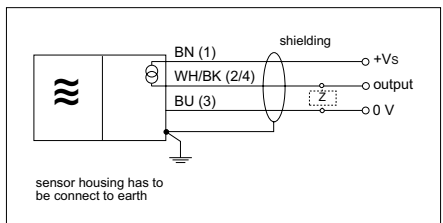

installation drawing

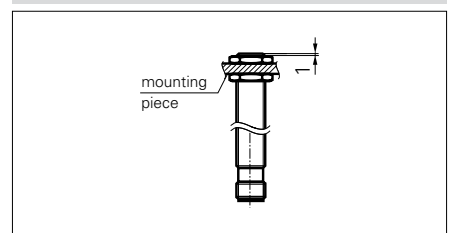

- peak to peak = 6 x RMS